

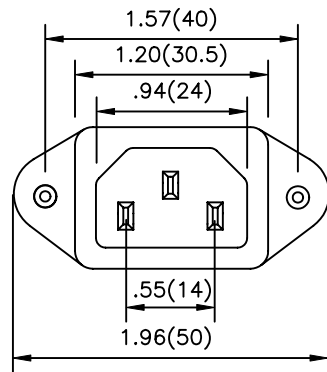



Revision		
Rev.	Description	Approved

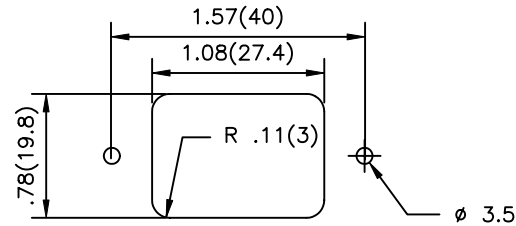



Countersunk Ear

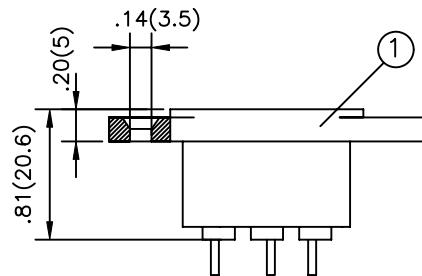

For Front Mounting Use
Panel Cut-Out

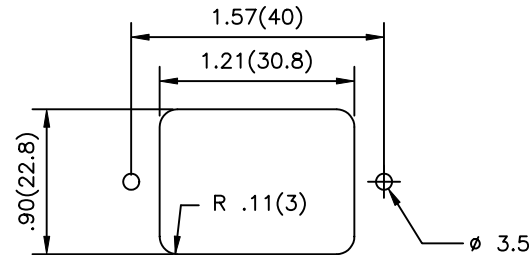

For Rear Mounting Use
Panel Cut-Out

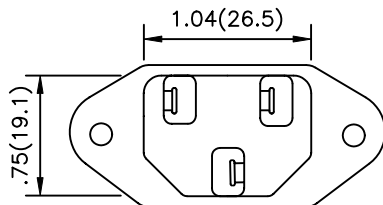

TERMINAL

Material:
Housing:Thermoplastic UL 94VO Flamability Rating
Terminal: Copper Alloy

Characteristics:
Rating: 10A 250V AC / 15A 250V AC
Insulation Resistance: Over 100 OHM 500V DC
Dielectric Strength: 2000V AC One Minute

Approvals:
UL,CSA,VDE,SEV,CB,SEMKO,DEMKO,NEMKO,and SETI
Countersink 4.8mm
703WCQ

2	TERMINAL	1SET	4.8x0.8T	COPPER ALLOY TIN-PLATED
1	HOUSING	1	RIVET SCREW TYPE	THERMOPLASTIC
Dim range (mm)		Tolerance +/-(mm)		Qualtek Electronics Corp. PPC DIVISION
		Part Number: 703W-00/07		
0-1		0.15	Description: AC INLET 3P RIVET/SCREW MOUNTING	
1-6		0.20		
6-18		0.30		
18-50		0.50		
50-120		0.70	Drawn/Date	Checked/Date
120-250		0.90	B.ZHANG 08-27-02	08-27-02
250-500		1.20	Approved/Date JJH/08-27-02	