




Tape Information

Vishay Siliconix

MICRO FOOT® 3x2: 0.5-mm PITCH, 0.165-mm BUMP HEIGHT

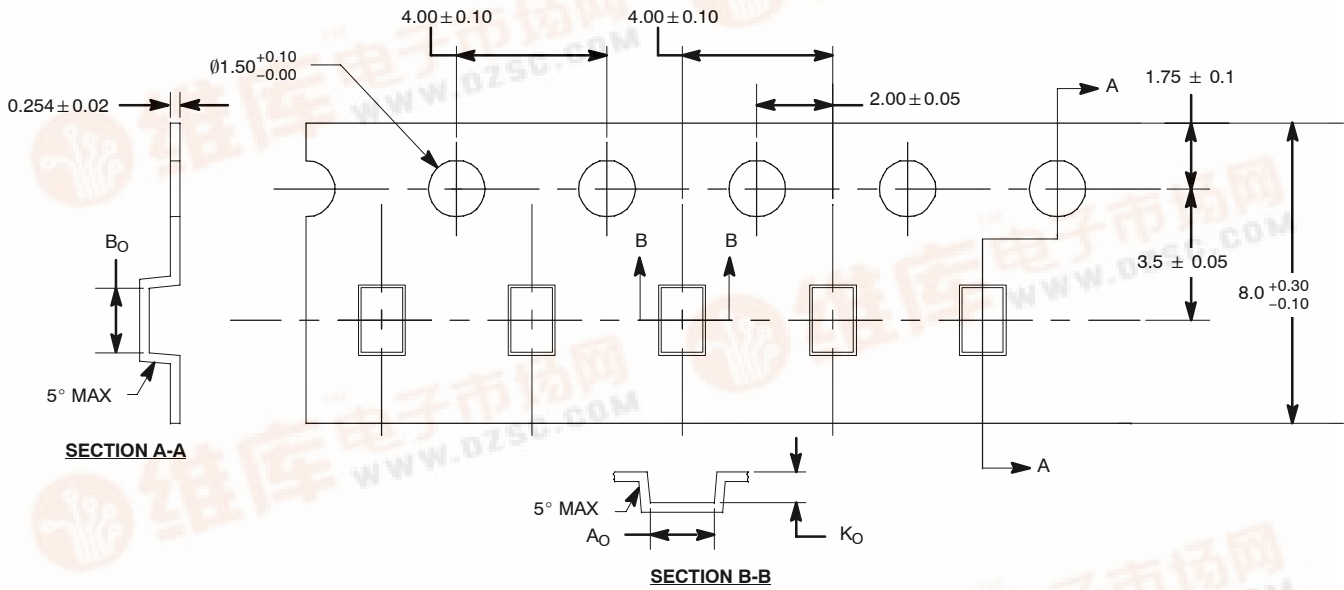

NOTES:

- 10-sprocket hole pitch cumulative tolerance ± 0.2 .
- Camber not to exceed 1 mm in 100 mm.
- Material: Black Conductive Polycarbonate.
- Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
- All sizes in mm unless specified.
- Use 7" Lok reel with 8.4 mm width, (see row 3 of drawing of 93-5211-x).
- Use seal tape with 5.4 mm width, (see row 8 of drawing of 92-5210-x).

PART #	VER	A ₀	B ₀	K ₀	REEL DIA.	LENGTH
DG3000-T1	-1	1.23 ± 0.05	1.73 ± 0.05	0.83 ± 0.05	178 mm	14 m approx.
DG3001-T1						
DG3002-T1	-2	1.19 ± 0.05	1.65 ± 0.05	0.86 ± 0.05		
DG3003-T1						

QUANTITY PER REEL	
T1	3000
ECN: S-32141—Rev. C, 10-Nov-03 DWG: 93-5221-x	

