


Model 7074**Type N (F) Panel Mount 50 Ω 1.13" L X 0.44" W.***Model 7074 Type N (F) Panel Mount*

Use for your 50 Ω N(F) panel mount applications.

Features


- Designed for panel mount applications with convenient solder cups
- Precision machined with white bronze plating
- Gold plated (30 micro-inches) contacts
- Insulation material is PTFE (**not delrin**)

Materials

- Body is machined brass with white bronze plating.
- Female center contacts are gold-plated (30 micro-inches) brass.
- High quality machined PTFE dielectric.

Ordering Information

Model: 7074, N(F), Panel Mount 1.13 L X 0.44 W

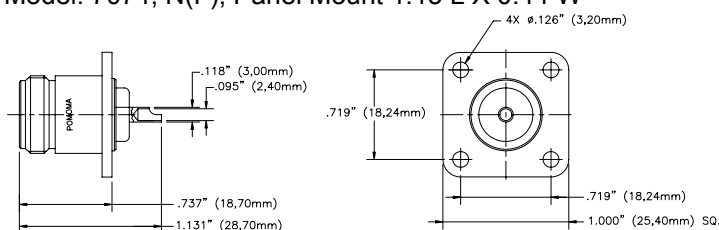**Specifications**

Nominal impedance	50 Ω
Frequency	0-11 GHz
VSWR	1.30 max. 0-11 GHz
Center / Outer contact resistance	1.0 / 0.2 m Ω
Number of insertions	500
Insulation resistance	5000 M Ω (min)
Dielectric withstand voltage	1500 Vrms
Ratings: Voltage: 500 Vrms Operating temperature: -85 °F to +131 °F (-65 °C to +155 °C) Max.	

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.