




Si3455ADV
Vishay Siliconix

P-Channel 30-V (D-S) MOSFET


PRODUCT SUMMARY		
V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
-30	0.100 @ $V_{GS} = -10$ V	-3.5
	0.170 @ $V_{GS} = -4.5$ V	-2.7

TrenchFET[®]
Power MOSFETs



Ordering Information: Si3455ADV-T1
Si3455ADV-T1—E3 (Lead Free)

Marking Code: A5xxx

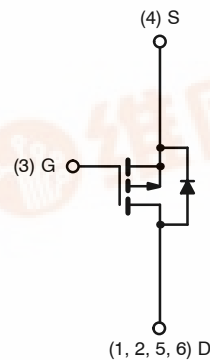

P-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS (T _A = 25°C UNLESS OTHERWISE NOTED)					
Parameter		Symbol	5 secs	Steady State	Unit
Drain-Source Voltage		V _{DS}	-30		V
Gate-Source Voltage		V _{GS}	± 20		
Continuous Drain Current (T _J = 150°C) ^a	T _A = 25°C	I _D	-3.5	-2.7	A
	T _A = 70°C		-2.8	-2.1	
Pulsed Drain Current		I _{DM}	-20		
Continuous Source Current (Diode Conduction) ^a		I _S	-1.7	-0.95	
Maximum Power Dissipation ^a	T _A = 25°C	P _D	2.0	1.14	W
	T _A = 70°C		1.3	0.73	
Operating Junction and Storage Temperature Range		T _J , T _{stg}	-55 to 150		°C

THERMAL RESISTANCE RATINGS				
Parameter	Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient ^a	R_{thJA}	50	62.5	$^\circ\text{C/W}$
		90	110	
Maximum Junction-to-Foot (Drain)	R_{thJF}	30	36	

Notes:
a. Surface Mounted on 1" x 1" FR4 Board.



SPECIFICATIONS ($T_J = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\ \mu\text{A}$	-1.0		-3.0	V
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0\ \text{V}, V_{GS} = \pm 20\ \text{V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -30\ \text{V}, V_{GS} = 0\ \text{V}$			-1	μA
		$V_{DS} = -30\ \text{V}, V_{GS} = 0\ \text{V}, T_J = 85^\circ\text{C}$			-5	
On-State Drain Current ^a	$I_{D(on)}$	$V_{DS} \leq -5\ \text{V}, V_{GS} = -10\ \text{V}$	-20			A
Drain-Source On-State Resistance ^a	$r_{DS(on)}$	$V_{GS} = -10\ \text{V}, I_D = -3.5\ \text{A}$		0.080	0.100	Ω
		$V_{GS} = -4.5\ \text{V}, I_D = -2.7\ \text{A}$		0.140	0.170	
Forward Transconductance ^a	g_{fs}	$V_{DS} = -15\ \text{V}, I_D = -3.5\ \text{A}$		6		S
Diode Forward Voltage ^a	V_{SD}	$I_S = -1.7\ \text{A}, V_{GS} = 0\ \text{V}$		-0.8	-1.2	V
Dynamic^b						
Total Gate Charge	Q_g	$V_{DS} = -15\ \text{V}, V_{GS} = -10\ \text{V}, I_D = -3.5\ \text{A}$		8.5	13	nC
Gate-Source Charge	Q_{gs}			2.2		
Gate-Drain Charge	Q_{gd}			1.5		
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = -15\ \text{V}, R_L = 15\ \Omega$ $I_D \cong -1\ \text{A}, V_{GEN} = -10\ \text{V}, R_g = 6\ \Omega$		10	20	ns
Rise Time	t_r			7	15	
Turn-Off Delay Time	$t_{d(off)}$			20	35	
Fall Time	t_f			10	20	
Source-Drain Reverse Recovery Time	t_{rr}	$I_F = -1.7\ \text{A}, di/dt = 100\ \text{A}/\mu\text{s}$		30	60	

Notes







- a. Pulse test; pulse width $\leq 300\ \mu\text{s}$, duty cycle $\leq 2\%$.
b. Guaranteed by design, not subject to production testing.

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

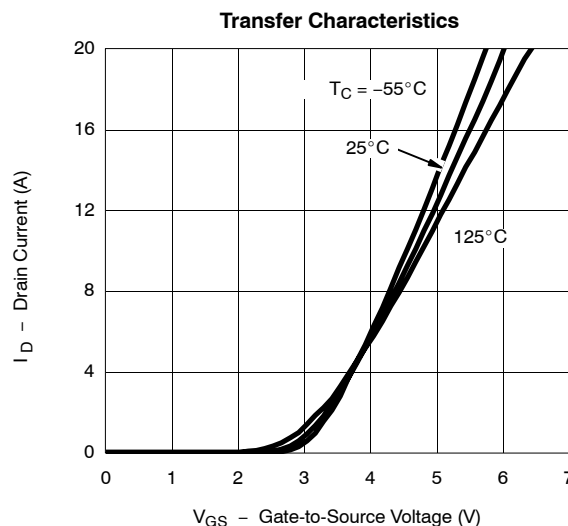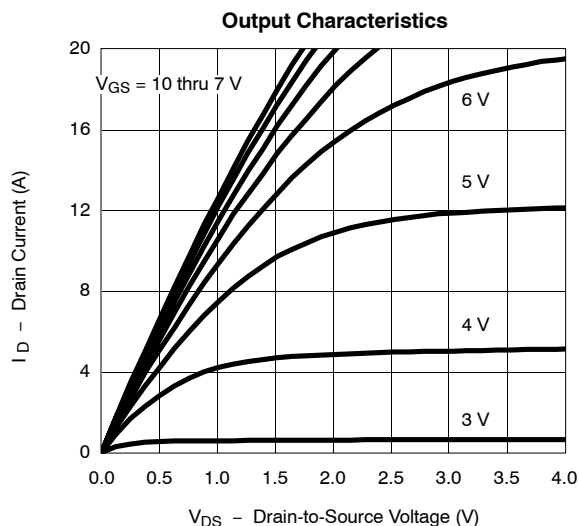



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

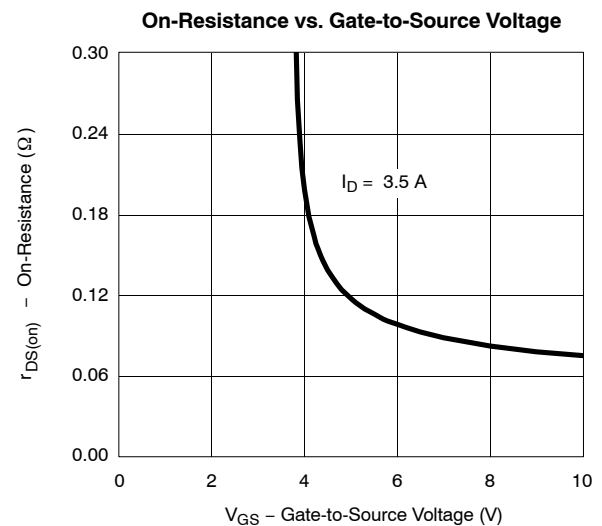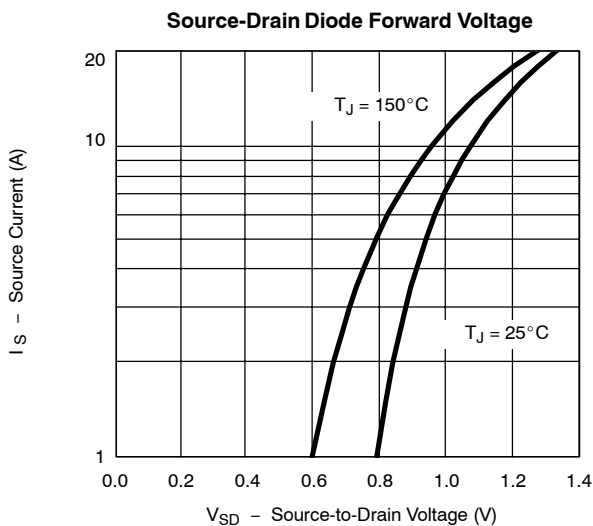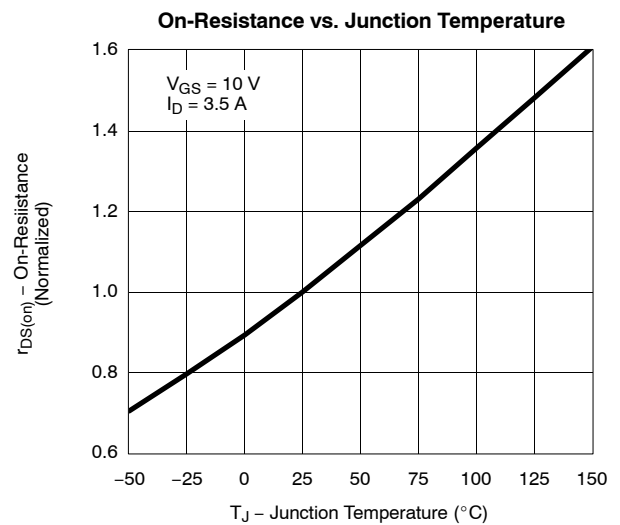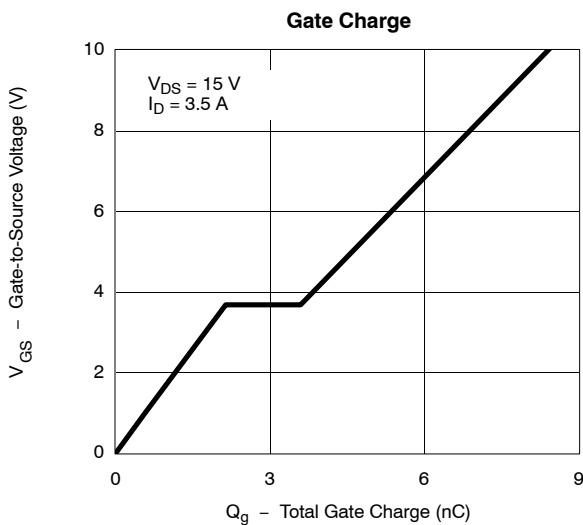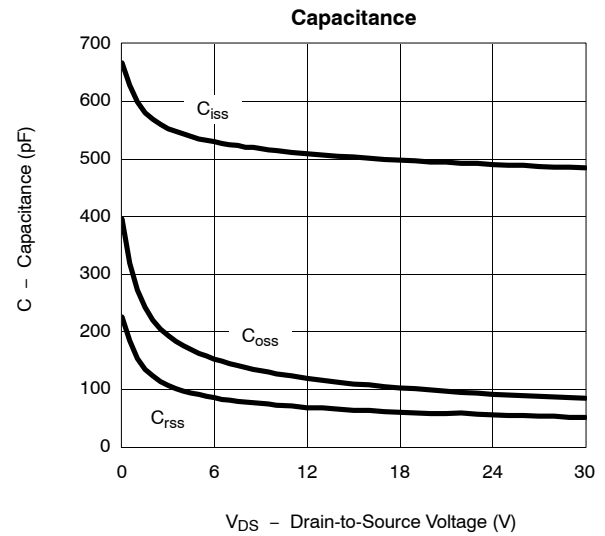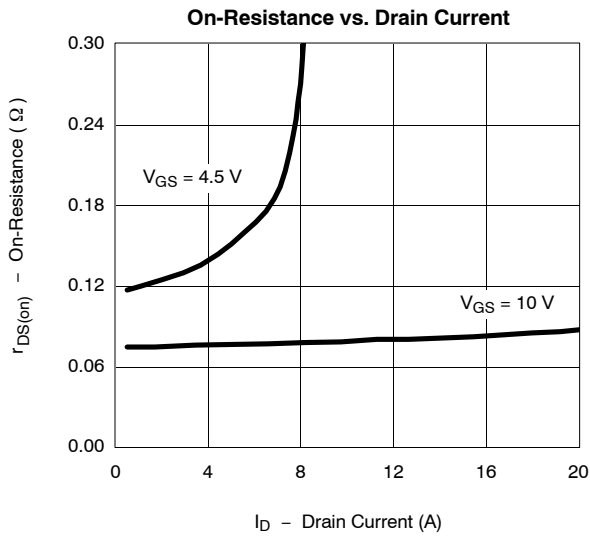

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

