
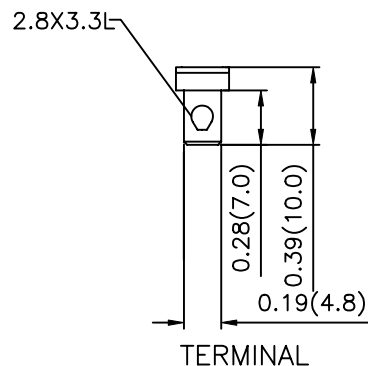
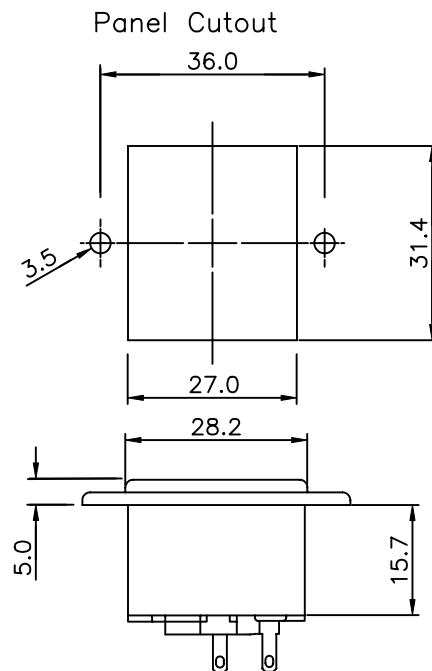
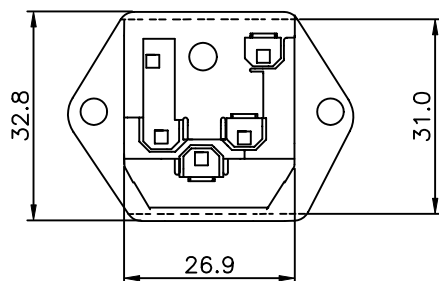



Revision		
Rev.	Description	Approved

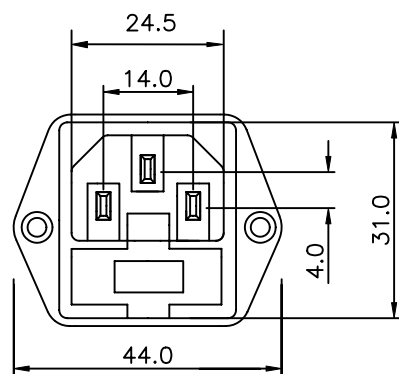

Max. Rating: 10A 250 Vac
 Contact Resistance: <10 m OHM
 Insulation Resistance: >10³ M OHM
 A.C. Breakdown:
 Pole-Pole 5kV. Poles-Panel 4.0kV.
 Operating Temperature: -40°C to +70°C
 Max. Pin Temperature: +65°C
 Materials: Nylon, Flammability Rating UL 94 V-0
 Contacts:
 Brass, Pins nickel plated, Tags tin plated,
 Terminal 4.8 Solder/Q.D. TABS

NOTE: Dual Fuseholder, One Active, One Spare
 Fuses Not Included - Recommended Size: 5X20mm

Dim range (mm)		Qualtek Electronics Corp. PPC DIVISION		
		Part Number: 719W-00/03		
		Description: SCREW MOUNT INLET WITH FUSEHOLDER		
0-1	0.15			
1-6	0.20			
6-18	0.30			
18-50	0.50			
50-120	0.70	Drawn/Date	Checked/Date	Approved/Date
120-250	0.90	B.ZHANG 08-28-02	08-28-02	JJH/08-28-02
250-500	1.20			