



Revision			
Rev.	Description	Date	Approved

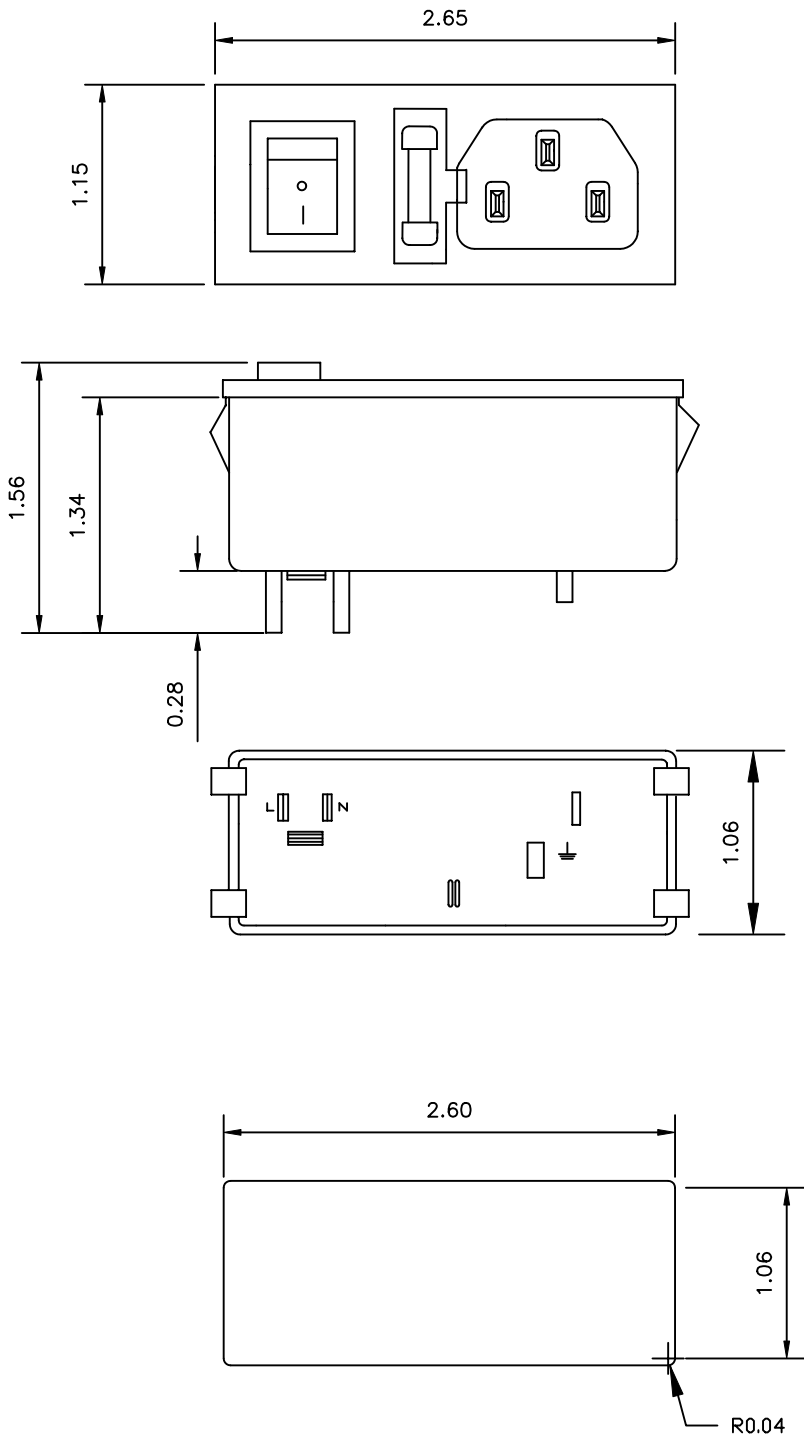

Electrical Characteristics:

Rated Current:

UL / CSA @ 115 / 250 VAC.....6/4 AMP

VDE @ 250 VAC.....10 AMP

DPST Power Switch:

UL/CSA @ 125 / 250 VAC.....6/4 AMP

VDE @ 250 VAC.....4 AMP

Single 5X20mm Fuseholder


Solder Tab Terminals

Flammability Class UL94V-0

Plastic Case

Snap-In Mount for Panel Thickness 1.0–1.8mm (.04”–.07”)

Electrical Schematic:

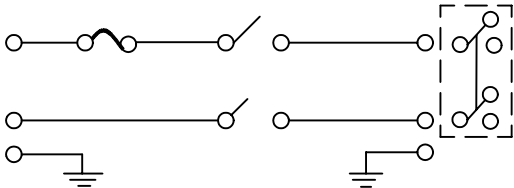

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp.		
		PPC DIVISION		
0–1	0.15	Part Number: 761–18/004		
1–6	0.20	Description: MULTI–FUNCTION MODULE		
6–18	0.30			
18–50	0.50			
50–120	0.70	Drawn/Date	Checked/Date	Approved/Date
120–250	0.90	B.ZHANG	01–23–03	JJH/01–23–03
250–500	1.20	01–23–03		