



May 2000

LM78XX

Series Voltage Regulators

General Description

The LM78XX series of three terminal regulators is available with several fixed output voltages making them useful in a wide range of applications. One of these is local on card regulation, eliminating the distribution problems associated with single point regulation. The voltages available allow these regulators to be used in logic systems, instrumentation, HiFi, and other solid state electronic equipment. Although designed primarily as fixed voltage regulators these devices can be used with external components to obtain adjustable voltages and currents.

The LM78XX series is available in an aluminum TO-3 package which will allow over 1.0A load current if adequate heat sinking is provided. Current limiting is included to limit the peak output current to a safe value. Safe area protection for the output transistor is provided to limit internal power dissipation. If internal power dissipation becomes too high for the heat sinking provided, the thermal shutdown circuit takes over preventing the IC from overheating.

Considerable effort was expended to make the LM78XX series of regulators easy to use and minimize the number of external components. It is not necessary to bypass the output,

although this does improve transient response. Input bypassing is needed only if the regulator is located far from the filter capacitor of the power supply.

For output voltage other than 5V, 12V and 15V the LM117 series provides an output voltage range from 1.2V to 57V.

Features

- Output current in excess of 1A
- Internal thermal overload protection
- No external components required
- Output transistor safe area protection
- Internal short circuit current limit
- Available in the aluminum TO-3 package

Voltage Range

LM7805C 5V


LM7812C 12V

LM7815C 15V

Connection Diagrams

Metal Can Package

TO-3 (K)
Aluminum



DS007746-2


Bottom View

Order Number LM7805CK,
LM7812CK or LM7815CK

See NS Package Number KC02A

Plastic Package

TO-220 (T)

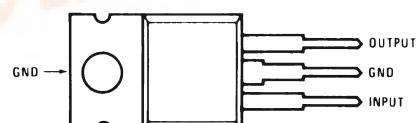

DS007746-3


Top View

Order Number LM7805CT,

LM7812CT or LM7815CT

See NS Package Number T03B

Schematic

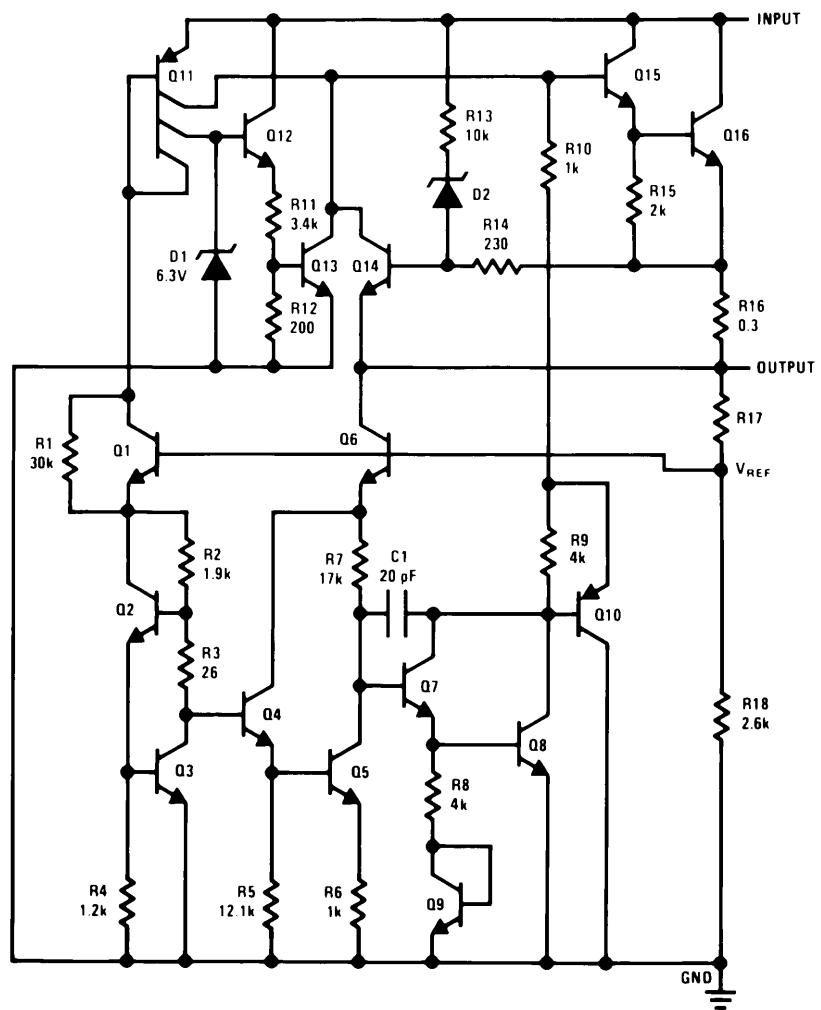

DS007746-1

Absolute Maximum Ratings (Note 3)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Input Voltage ($V_O = 5V, 12V$ and $15V$)	35V
Internal Power Dissipation (Note 1)	Internally Limited
Operating Temperature Range (T_A)	0°C to +70°C

Maximum Junction Temperature

(K Package)	150°C
(T Package)	150°C

Storage Temperature Range -65°C to +150°C

Lead Temperature (Soldering, 10 sec.)	-65°C to +150°C
TO-3 Package K	300°C
TO-220 Package T	230°C

Electrical Characteristics LM78XXC (Note 2)

0°C ≤ T_J ≤ 125°C unless otherwise noted.

Output Voltage			5V			12V			15V			Units	
Input Voltage (unless otherwise noted)			10V			19V			23V				
Symbol	Parameter	Conditions	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
V_O	Output Voltage	$T_J = 25^\circ C$, $5 \text{ mA} \leq I_O \leq 1\text{A}$	4.8	5	5.2	11.5	12	12.5	14.4	15	15.6	V	
		$P_D \leq 15W$, $5 \text{ mA} \leq I_O \leq 1\text{A}$ $V_{MIN} \leq V_{IN} \leq V_{MAX}$	4.75	5.25	(7.5 ≤ V_{IN} ≤ 20)	11.4	12.6	(14.5 ≤ V_{IN} ≤ 27)	14.25	15.75	(17.5 ≤ V_{IN} ≤ 30)	V	
ΔV_O	Line Regulation	$I_O = 500 \text{ mA}$	3	50	(7 ≤ V_{IN} ≤ 25)	4	120	(14.5 ≤ V_{IN} ≤ 30)	4	150	mV		
		$0^\circ C \leq T_J \leq +125^\circ C$	50	(8 ≤ V_{IN} ≤ 20)	(15 ≤ V_{IN} ≤ 27)	120	(18.5 ≤ V_{IN} ≤ 30)	(18.5 ≤ V_{IN} ≤ 30)	150	mV	V		
		$I_O \leq 1\text{A}$	50	(7.5 ≤ V_{IN} ≤ 20)	(14.6 ≤ V_{IN} ≤ 27)	120	(17.7 ≤ V_{IN} ≤ 30)	(17.7 ≤ V_{IN} ≤ 30)	150	mV	V		
		$0^\circ C \leq T_J \leq +125^\circ C$	25	(8 ≤ V_{IN} ≤ 12)	(16 ≤ V_{IN} ≤ 22)	60	(20 ≤ V_{IN} ≤ 26)	(20 ≤ V_{IN} ≤ 26)	75	mV	V		
ΔV_O	Load Regulation	$T_J = 25^\circ C$	5 mA ≤ $I_O \leq 1.5\text{A}$	10	50	12	120	12	150	mV			
			250 mA ≤ $I_O \leq 750 \text{ mA}$		25		60		75	mV			
		$5 \text{ mA} \leq I_O \leq 1\text{A}$, $0^\circ C \leq T_J \leq +125^\circ C$		50		120		150		mV			
		I_Q	$I_O \leq 1\text{A}$	$T_J = 25^\circ C$	8		8		8	mA			
ΔI_Q	Quiescent Current Change	$0^\circ C \leq T_J \leq +125^\circ C$		8.5		8.5		8.5	mA				
		$5 \text{ mA} \leq I_O \leq 1\text{A}$		0.5		0.5		0.5	mA				
		$T_J = 25^\circ C$, $I_O \leq 1\text{A}$		1.0		1.0		1.0	mA				
		$V_{MIN} \leq V_{IN} \leq V_{MAX}$		(7.5 ≤ V_{IN} ≤ 20)	(14.8 ≤ V_{IN} ≤ 27)	(17.9 ≤ V_{IN} ≤ 30)						V	
		$I_O \leq 500 \text{ mA}$, $0^\circ C \leq T_J \leq +125^\circ C$		1.0		1.0		1.0	mA				
		$V_{MIN} \leq V_{IN} \leq V_{MAX}$		(7 ≤ V_{IN} ≤ 25)	(14.5 ≤ V_{IN} ≤ 30)	(17.5 ≤ V_{IN} ≤ 30)						V	
V_N	Output Noise Voltage	$T_A = 25^\circ C$, $10 \text{ Hz} \leq f \leq 100 \text{ kHz}$		40		75		90		μV			
$\frac{\Delta V_{IN}}{\Delta V_{OUT}}$	Ripple Rejection	$I_O \leq 1\text{A}$, $T_J = 25^\circ C$		62	80	55	72	54	70	dB			
		$f = 120 \text{ Hz}$	$I_O \leq 500 \text{ mA}$	62		55		54		dB			
		$0^\circ C \leq T_J \leq +125^\circ C$			(8 ≤ V_{IN} ≤ 18)	(15 ≤ V_{IN} ≤ 25)	(18.5 ≤ V_{IN} ≤ 28.5)					V	
		$V_{MIN} \leq V_{IN} \leq V_{MAX}$											
R_O	Dropout Voltage Output Resistance	$T_J = 25^\circ C$, $I_{OUT} = 1\text{A}$		2.0		2.0		2.0		V			
		$f = 1 \text{ kHz}$		8		18		19		mΩ			

Electrical Characteristics LM78XXC (Note 2) (Continued)

$0^{\circ}\text{C} \leq T_j \leq 125^{\circ}\text{C}$ unless otherwise noted.

Output Voltage			5V			12V			15V			Units	
Input Voltage (unless otherwise noted)			10V			19V			23V				
Symbol	Parameter	Conditions	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
	Short-Circuit Current	$T_j = 25^{\circ}\text{C}$		2.1			1.5			1.2		A	
	Peak Output Current	$T_j = 25^{\circ}\text{C}$		2.4			2.4			2.4		A	
	Average TC of V_{OUT}	$0^{\circ}\text{C} \leq T_j \leq +125^{\circ}\text{C}$, $I_O = 5 \text{ mA}$		0.6			1.5			1.8		$\text{mV}/^{\circ}\text{C}$	
V_{IN}	Input Voltage Required to Maintain Line Regulation	$T_j = 25^{\circ}\text{C}$, $I_O \leq 1\text{A}$		7.5			14.6			17.7		V	


Note 1: Thermal resistance of the TO-3 package (K , K_C) is typically $4^{\circ}\text{C}/\text{W}$ junction to case and $35^{\circ}\text{C}/\text{W}$ case to ambient. Thermal resistance of the TO-220 package (T) is typically $4^{\circ}\text{C}/\text{W}$ junction to case and $50^{\circ}\text{C}/\text{W}$ case to ambient.

Note 2: All characteristics are measured with capacitor across the input of $0.22 \mu\text{F}$, and a capacitor across the output of $0.1\mu\text{F}$. All characteristics except noise voltage and ripple rejection ratio are measured using pulse techniques ($t_w \leq 10 \text{ ms}$, duty cycle $\leq 5\%$). Output voltage changes due to changes in internal temperature must be taken into account separately.


Note 3: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. For guaranteed specifications and the test conditions, see Electrical Characteristics.

Typical Performance Characteristics


Maximum Average Power Dissipation

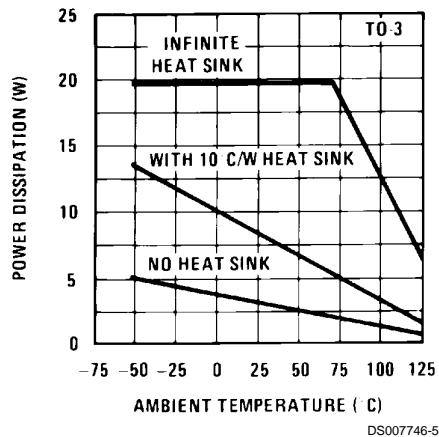


Maximum Average Power Dissipation

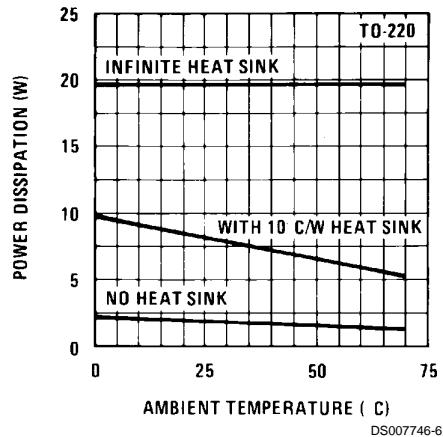


Peak Output Current

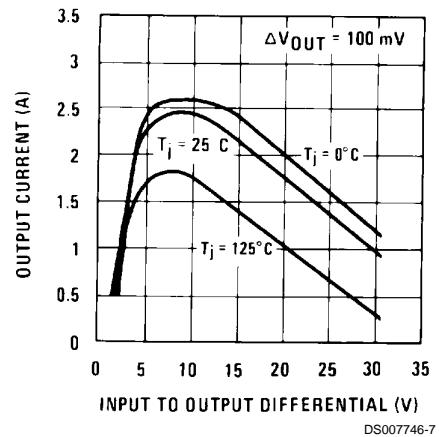


Output Voltage (Normalized to 1V at T_J = 25°C)

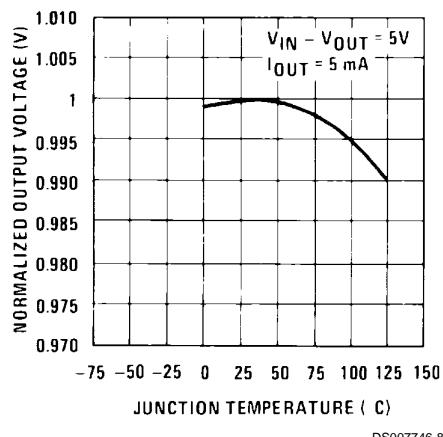

Ripple Rejection

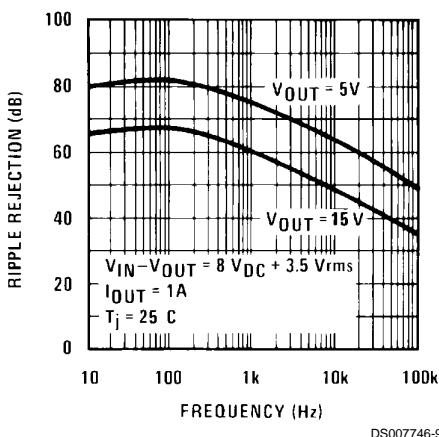


Ripple Rejection

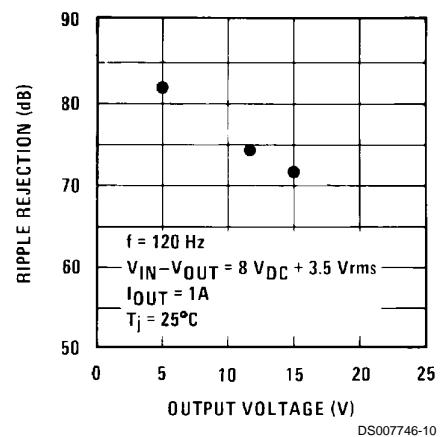


Typical Performance Characteristics (Continued)

Output Impedance

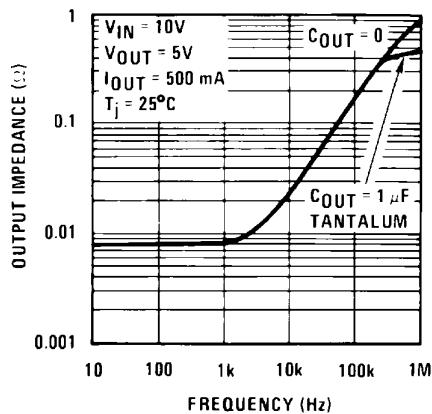


DS007746-11

Dropout Voltage

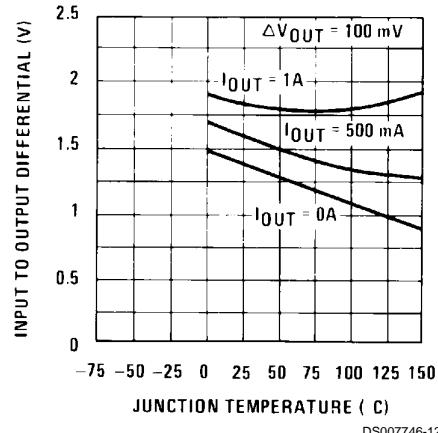


DS007746-12

Dropout Characteristics

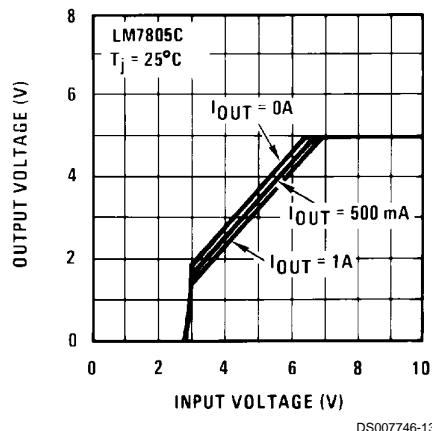


DS007746-13

Quiescent Current

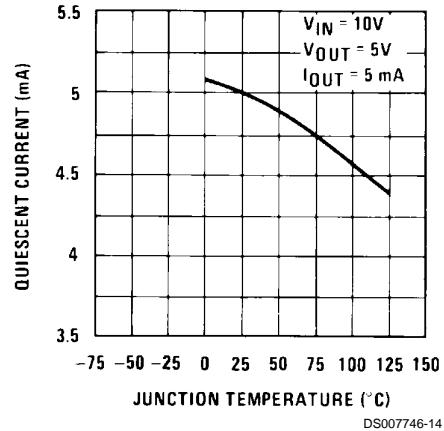

DS007746-14


Quiescent Current

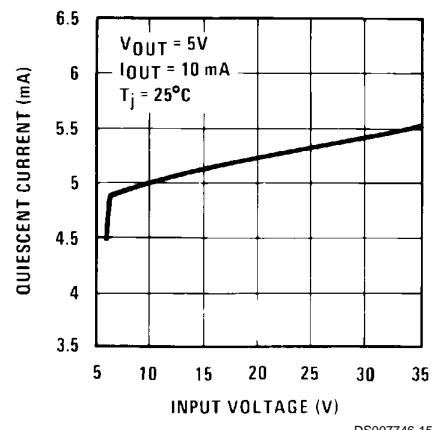

DS007746-15

Physical Dimensions

inches (millimeters) unless otherwise noted

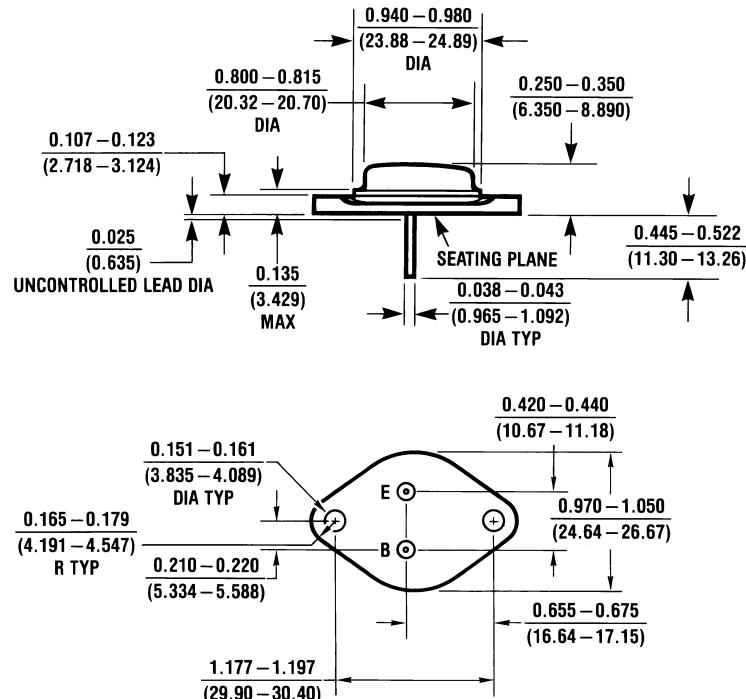


KC02A (REV C)

Aluminum Metal Can Package (KC)
Order Number LM7805CK, LM7812CK or LM7815CK
NS Package Number KC02A

LM78XX Series Voltage Regulators

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

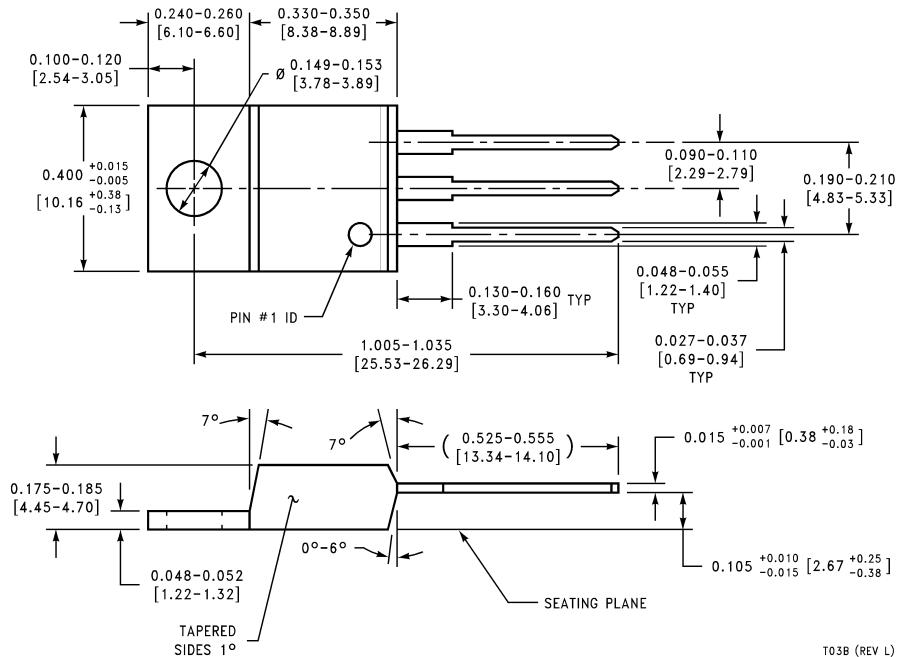

T03B (REV L)

TO-220 Package (T)
Order Number LM7805CT, LM7812CT or LM7815CT
NS Package Number T03B

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
Americas
 Tel: 1-800-272-9959
 Fax: 1-800-737-7018
 Email: support@nsc.com
www.national.com

National Semiconductor Europe
 Fax: +49 (0) 180-530 85 86
 Email: europe.support@nsc.com
 Deutsch Tel: +49 (0) 69 9508 6208
 English Tel: +44 (0) 870 24 0 2171
 Français Tel: +33 (0) 1 41 91 8790

National Semiconductor Asia Pacific Customer Response Group
 Tel: 65-2544466
 Fax: 65-2504466
 Email: ap.support@nsc.com

National Semiconductor Japan Ltd.
 Tel: 81-3-5639-7560
 Fax: 81-3-5639-7507