



Revision			
Rev.	Description	Date	Approved

1. PHYSICAL DIMENSIONS:

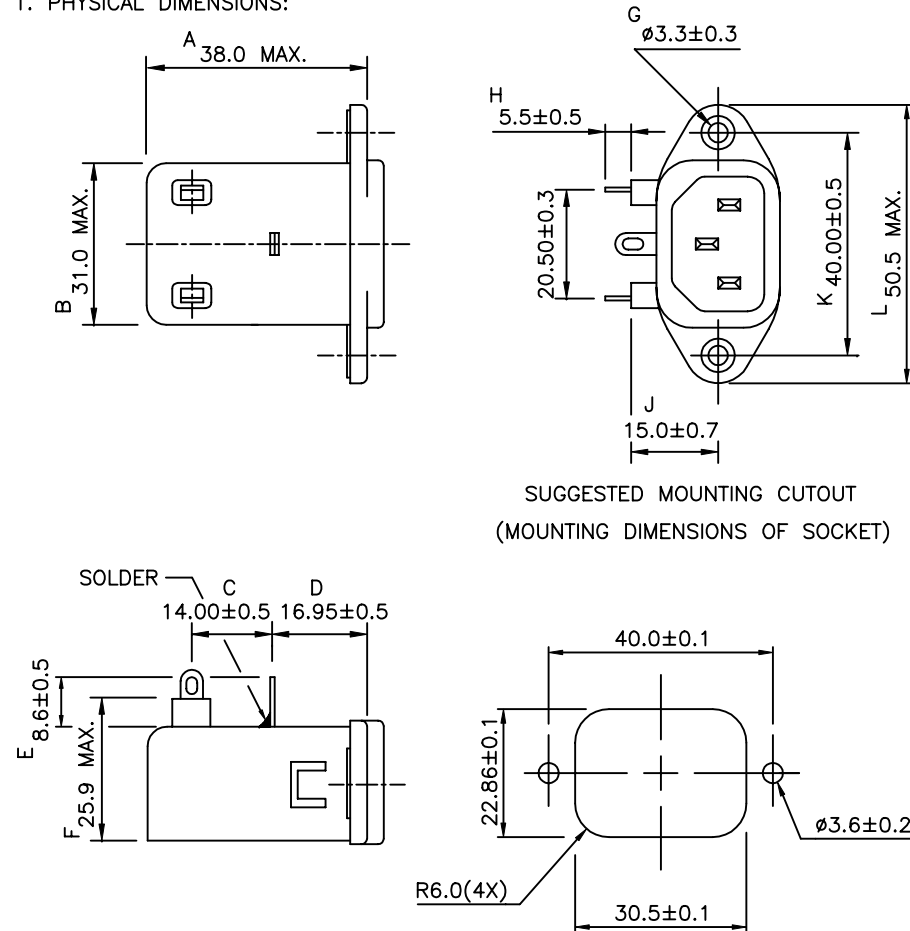

2. ELECTRICAL SCHEMATIC



L: 2.3mH
C1: 0.033uF
C2: 2200pF

1. ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE RATING 115/250VAC
- 1-2. CURRENT RATING
 - A. AT 115VAC 3 A RMS Max.
 - B. AT 250VAC 3 A RMS Max.
- 1-3. OPERATING FREQUENCY..... 50/60 Hz
- 1-4. LEAKAGE CURRENT: EACH LINE TO GROUND
 - A. @115VAC 60Hz 0.20 mA Max.
 - B. @250VAC 50Hz 0.40 mA Max.
- 1-5. HIPOT RATING (FOR ONE MINUTE)
 - A. LINE TO GROUND 2500VDC
 - B. LINE TO LINE 1740VDC
- 1-6. TEMPERATURE RANGE: -25 TO +85 DEGREE C
- 1-7. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	/	10	15	22	30	35	45	45	48
DIF. MODE dB	/	/	/	0	5	14	40	45	38

1-8. SAFETY



Dim range (mm)		Qualtek Electronics Corp. PPC DIVISION		
Tolerance +/- (mm)		Part Number: 857-03/047		
0-1		Description: EMI FILTER		
1-6				
6-18				
18-50				
50-120				
120-250				
250-500				
		UNIT:mm		
		Drawn/Date	Checked/Date	Approved/Date
		B.ZHANG 12-06-02	12-06-02	JJH/12-06-02