


Revision		Date	Approved
Rev.	Description		

1. PHYSICAL DIMENSIONS:

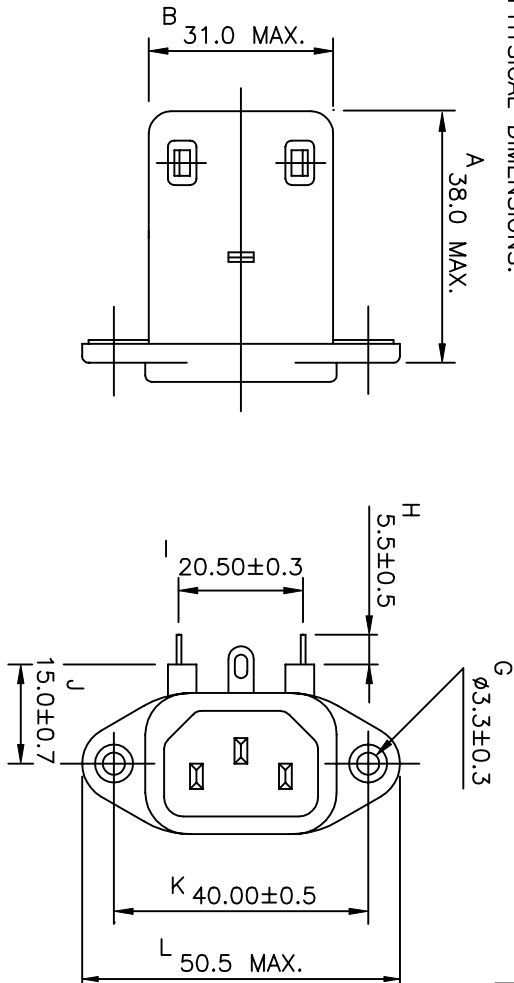

1. ELECTRICAL CHARACTERISTICS:


- 1-1. VOLTAGE RATING 115/250VAC
- 1-2. CURRENT RATING
- A. AT 115VAC 6 A RMS Max.
 - B. AT 250VAC 6 A RMS Max.
- 1-3. OPERATING FREQUENCY..... 50/60 Hz
- 1-4. LEAKAGE CURRENT: EACH LINE TO GROUND
- A. @115VAC 60Hz 0.20 mA Max.
 - B. @250VAC 50Hz 0.40 mA Max.
- 1-5. HIPOT RATING (FOR ONE MINUTE)
- A. LINE TO GROUND 2250VDC
 - B. LINE TO LINE 1450VDC
- 1-6. TEMPERATURE RANGE: -25 TO +85 DEGREE C
- 1-7. MINIMUM INSERTION LOSS IN DB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE DB	/	/	4	8	12	20	25	40	45
DIF. MODE DB	/	/	0	1	5	8	32	35	40


1-8. SAFETY



SUGGESTED MOUNTING CUTOUT
(MOUNTING DIMENSIONS OF SOCKET)

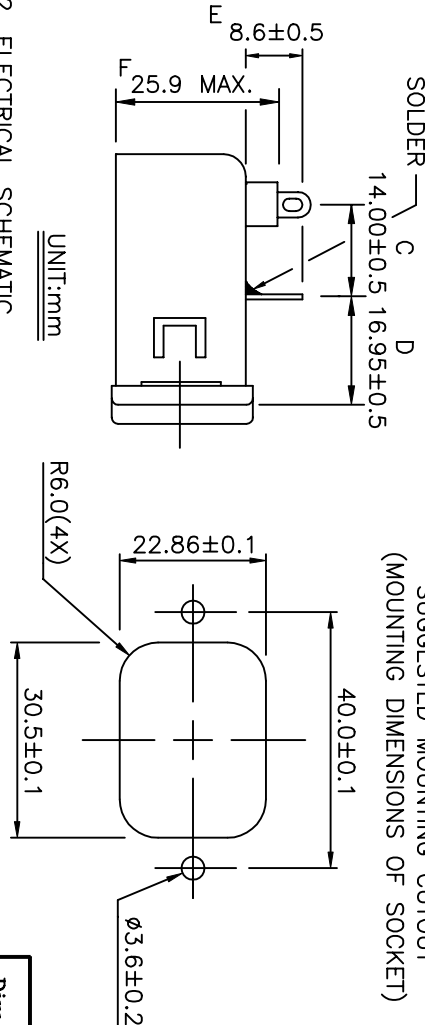

2. ELECTRICAL SCHEMATIC

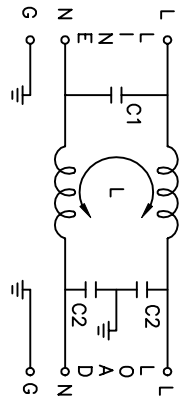

Qualtek Electronics Corp.			
PPC DIVISION			
Part Number: 857-06/048		Description:	
0-1		EMI FILTER	
1-6		0.20	
6-18		0.30	
18-50		0.50	
50-120		0.70	
120-250		0.90	
250-500		1.20	
Dim range (mm)		Tolerance +/- (mm)	
0-1		0.15	
1-6		0.20	
6-18		0.30	
18-50		0.50	
50-120		0.70	
120-250		0.90	
250-500		1.20	
Drawn/Date		Checked/Date	
B.ZHANG		BAC 10-10-01	
10-10-01		Approved/Date	
		JJH/10-10-01	