

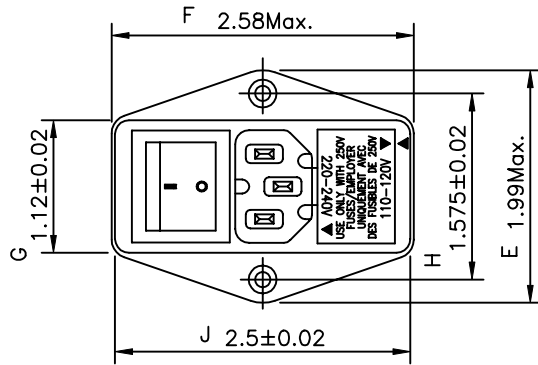
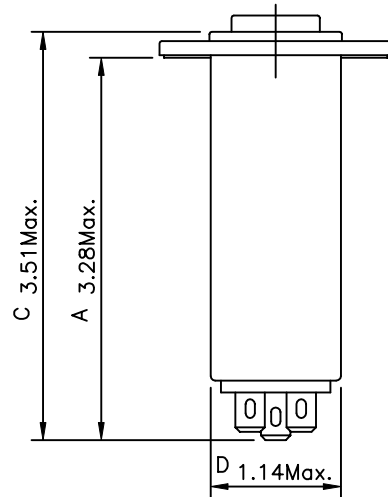



PHYSICAL DIMENSIONS:

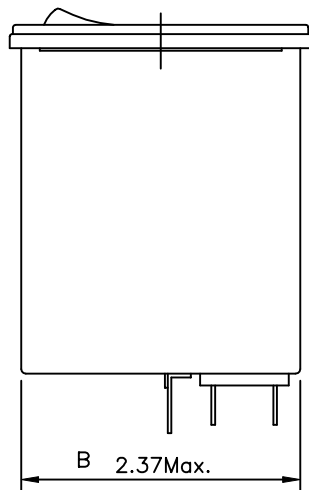

SUGGESTED MOUNTING CUTOUT

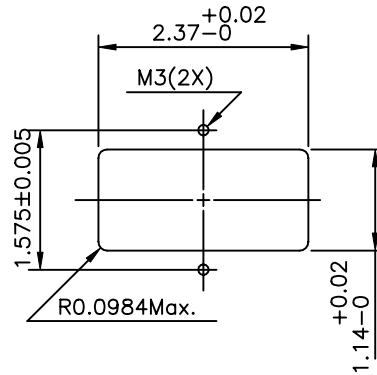

2. SCHEMATIC:

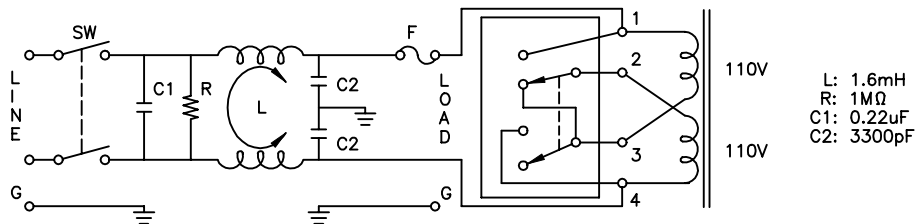

Revision			
Rev.	Description	Date	Approved

1. ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE RATING 115/250VAC
- 1-2. CURRENT RATING
 - A. AT 115/250VAC 10 A RMS Max.
 - B. AT 250VAC (VDE) 6(4) A RMS Max.
- 1-3. OPERATING FREQUENCY..... 50/60 Hz
- 1-4. LEAKAGE CURRENT: EACH LINE TO GROUND
 - A. @115VAC 60Hz 0.25 mA Max.
 - B. @250VAC 50Hz 0.45 mA Max.
- 1-5. HIPOT RATING (FOR ONE MINUTE)
 - A. LINE TO GROUND 2250VDC
 - B. LINE TO LINE 1450VDC
- 1-6. TEMPERATURE RANGE: -25 TO +85 DEGREE C
- 1-7. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	/	10	15	20	20	30	40	40	30
DIF. MODE dB	/	2	5	8	15	30	40	45	35

1-8. SAFETY



Dim range (mm)		Tolerance +/-(mm)		Qualtek Electronics Corp. PPC DIVISION		
0-1		0.15		Part Number: 864-10/011		
1-6		0.20		Description: EMI FILTER		
6-18		0.30		UNIT: INCH		
18-50		0.50		Drawn/Date		
50-120		0.70		Checked/Date		Approved/Date
120-250		0.90		B.ZHANG		JJH/01-14-03
250-500		1.20		01-14-03		