



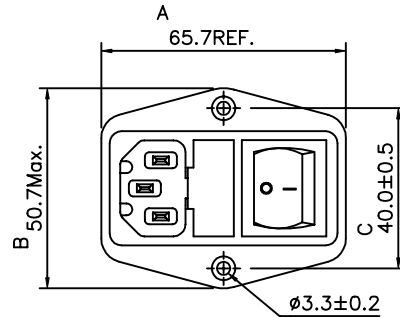



PHYSICAL DIMENSIONS:



SUGGEST MOUNTING CUTOUT

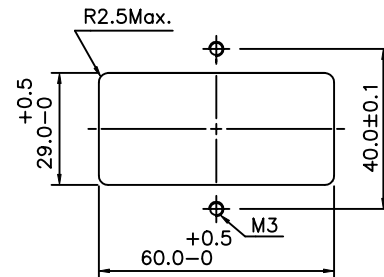

SCHEMATIC:

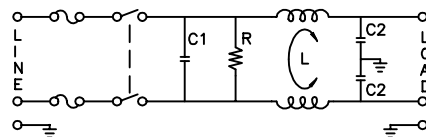

L: 0.45mH
C1: 0.22uF
C2: 2200pF
R: 1.0MΩ

Revision			
Rev.	Description	Date	Approved

1. ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE RATING 115/250VAC
- 1-2. CURRENT RATING
A. AT 115VAC 6 A RMS Max.
B. AT 250VAC 6 A RMS Max.
- 1-3. OPERATING FREQUENCY..... 50/60 Hz
- 1-4. LEAKAGE CURRENT: EACH LINE TO GROUND
A. @115VAC 60Hz 0.20 mA Max.
B. @250VAC 50Hz 0.40 mA Max.
- 1-5. HIPOT RATING (FOR ONE MINUTE)
A. LINE TO GROUND 2250VDC
B. LINE TO LINE 1450VDC
- 1-6. TEMPERATURE RANGE: -25 TO +85 DEGREE C
- 1-7. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	/	2	5	8	15	20	32	40	25
DIF. MODE dB	/	2	5	8	15	15	30	35	35

1-8. SAFETY



1-9. USE 5X20mm FUSE

Dim range (mm)	Tolerance +/-(mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number: 880-06/003		
0-1	0.15	Description: EMI FILTER MULTI-FUNCTION		
1-6	0.20			
6-18	0.30	UNIT: mm	Rev A	
18-50	0.50			
50-120	0.70	Drawn/Date	Checked/Date	Approved/Date
120-250	0.90	B.ZHANG 03-18-04	PC/03-18-04	JJH/03-18-04
250-500	1.20			