



PHYSICAL DIMENSIONS:

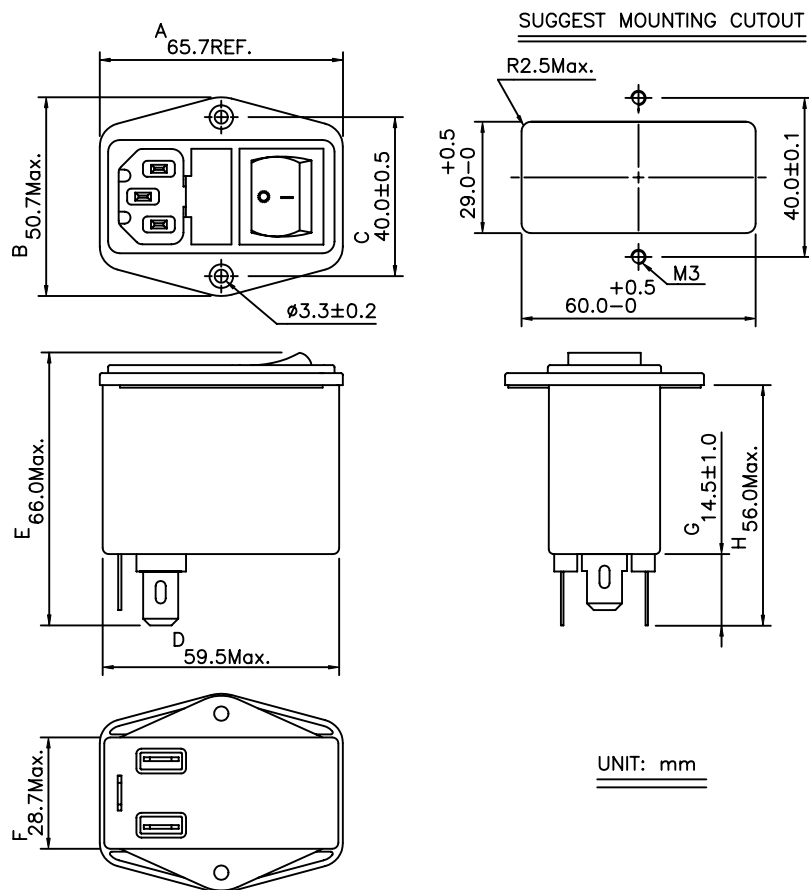

SCHEMATIC:

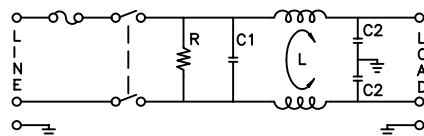

L: 0.45mH
C1: 0.22uF
C2: 2200pF
R: 1.0MΩ

Revision			
Rev.	Description	Date	Approved

1. ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE RATING 115/250VAC
- 1-2. CURRENT RATING
A. AT 115VAC 6 A RMS Max.
B. AT 250VAC 6 A RMS Max.
- 1-3. OPERATING FREQUENCY..... 50/60 Hz
- 1-4. LEAKAGE CURRENT: EACH LINE TO GROUND
A. @115VAC 60Hz 0.20 mA Max.
B. @250VAC 50Hz 0.40 mA Max.
- 1-5. HIPOT RATING (FOR ONE MINUTE)
A. LINE TO GROUND 2250VDC
B. LINE TO LINE 1450VDC
- 1-6. TEMPERATURE RANGE: -25 TO +85 DEGREE C
- 1-7. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	/	2	5	8	15	20	32	40	25
DIF. MODE dB	/	2	5	8	15	15	30	35	35

1-8. SAFETY



Dim range (mm)		Qualtek Electronics Corp. PPC DIVISION		
Tolerance +/- (mm)		Part Number: 880-06/006		
0-1		Description: EMI FILTER		
1-6				
6-18				
18-50				
50-120		Drawn/Date	Checked/Date	Approved/Date
120-250		B.ZHANG	01-16-03	JJH/01-16-03
250-500		01-16-03		