

FEATURES AND SPECIFICATIONS

Features and Benefits

- High reliability, square contact
- EMI/RFI protection
- ISDN standard
- 0.10mm coplanarity

Reference Information

Product Specification: PS-95040

Packaging: Anti-static blister reel

Mates With: FCC 68 plugs

Designed In: Millimeters

Electrical

Voltage: 125V

Current: 1.5A

Contact Resistance: 20mΩ max.

Dielectric Withstanding Voltage: 1000V

Insulation Resistance: 500 MΩ min.

Shielding Effectiveness: 20 dB min.

Physical

Housing: Black polyamide, UL 94V-0

Contact: Phosphor Bronze



Plating: 1.27 to 1.52 μ m (50 to 60 μ "") Gold in contact

area, 1.90 μ m (75 μ ") min. (90/10) Tin/Lead in tail
area both over Nickel overall

Temperature: -40 to +80°C

95040

Right Angle Low Profile, Internal Shield

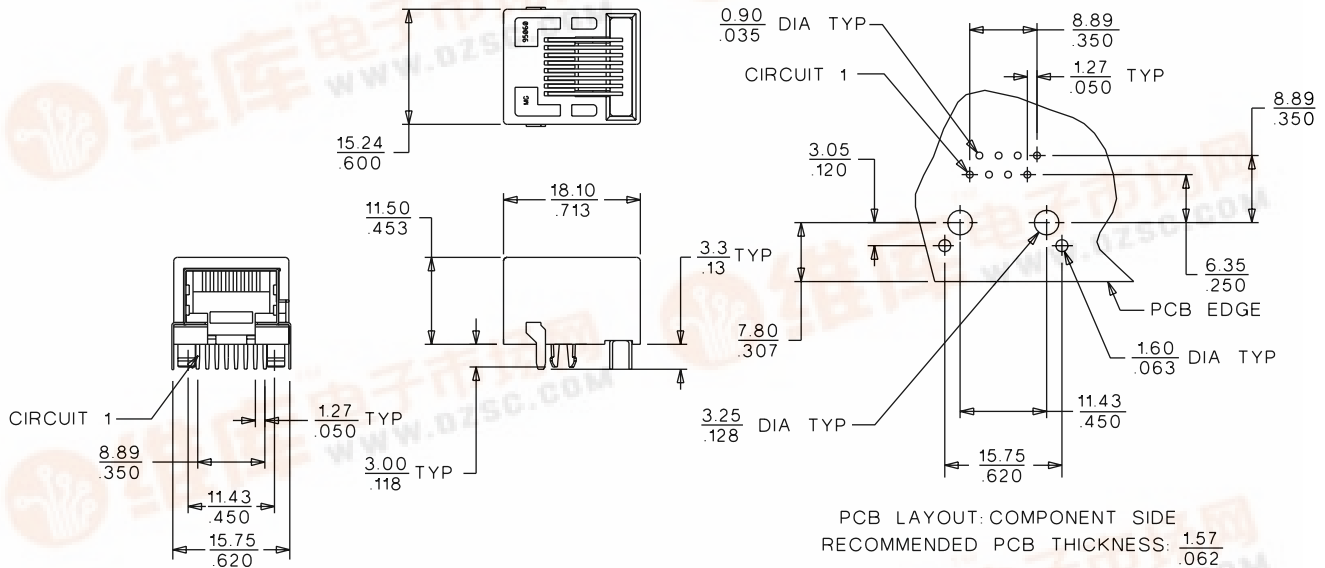

ORDERING INFORMATION

Circuits	Loaded Contacts	Order No.	Key
8	8	• 95040-2881	No

- US Standard Product, available through Molex franchised distributors