




The RT0100 is CMOS Design for single tone alarm sound application

Features

- Low Operating Voltage 2V~5V
- CMOS process
- On-Chip RC oscillator
- Low stand by current

Pin Diagram

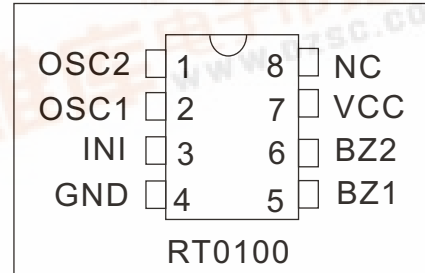

Pin Description

Symbol	Description	Pin	I / O
OSC2	Oscillator pin	1	I
OSC1	Oscillator pin	2	O
INI	An internal pull-up resistor. Might disable BZ1, BZ2 when connected to GND.	3	I
GND	Ground	4	
BZ1	Audio output	5	O
BZ2	Audio output	6	O
VCC	Power	7	
NC	No Connecting	8	

Electrical Characteristics

Vcc = 3V, Temp. = 25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operating Voltage	Vcc	2.0	3.0	5.0	V
Stand-By Current	I _{sb}		30	50	uA
Operating Current	I _{op}		300	500	uA
BZ1, BZ2	I _{oh}	1.0			mA
Driving Current	I _{ol}	1.0			mA
Operating Frequency	F _{op}		128		KHz

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
Vcc	Supply Voltage	-0.3 ~ 6	V
V _i	Input Voltage	-0.3 ~ Vcc + 0.3	V
V _o	Output Voltage	-0.3 ~ Vcc + 0.3	V
T _{st}	Storage Temperature	-40 ~ 125	°C
T _{tp}	Operating Temperature	0 ~ 65	°C

