


Manufactured to close tolerances from aluminium with stainless steel operating screw. The top and bottom plates are specially designed aluminium extrusion giving exceptional rigid and robust support without excessive weight. The plates are blue anodised finish. The labjacks are designed to be completely stable and free from rocking movements.

All the labjacks with the exception of the 2041 and 2038 have a 10 mm tapped hole in the right rear corner to take standard retort rods for which a locking nut is provided. Extension plates can be fitted to the 3 largest sizes.

## 2036

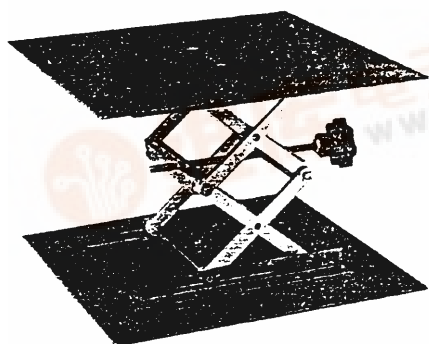

### SPECIFICATIONS

CATALOGUE NUMBER	PLATE DIMENSIONS	MAXIMUM HEIGHT	CLOSED HEIGHT	MAXIMUM LOAD	GROSS WEIGHT
2041	50 x 40 mm	78 mm	36 mm	20 kg	0.15 kg
2038	100 x 100 mm	140 mm	43 mm	30 kg	0.54 kg
9037	140 x 120 mm	260 mm	55 mm	60 kg	0.8 kg
2035-707 6769	150 x 150 mm	290 mm	60 mm	60 kg	0.95 kg
2036-707 6770	200 x 200 mm	290 mm	57 mm	80 kg	2.15 kg
2040	200 x 230 mm	290 mm	57 mm	80 kg	2.4 kg
2042-707 6782	320 x 260 mm	470 mm	128 mm	90 kg	7.5 kg

### 2039

#### EXTENSION PLATE (1 pair per set)

Manufactured in aluminium with anodised blue finish, complete with stainless steel fixing screw and nuts.

Dimensions: 300 x 300 x 3 mm each. Weight: 1.45 Kg/Pair.  
For use with 2036 and 2040 Labjack.

### 2043

#### EXTENSION PLATE (1 pair per set)

As number 2039 but for use with 2042 Labjack.

Dimensions : 485 x 450 x 5 mm each. Weight: 6.3 Kg/Pair.