

Surge Arrester


T30-A90X

3-Electrode-Arrester

Ordering code: B88069X3030C253

DC spark-over voltage ^{1) 2) 3)}	72 ... 108	V
DC spark-over voltage ^{3) 5)}	72 ... 180	V
DC spark-over voltage ^{2) 4)}	72 ... 230	V
Impulse spark-over voltage		
at 1 kV/μs - for 99 % of measured values ³⁾	< 500	V
- for 50 % of measured values ³⁾	< 380	V
at 1 kV/μs - for 99 % of measured values ⁴⁾	< 700	V
- for 50 % of measured values ⁴⁾	< 600	V
Insulation resistance at 50 V _{dc} ³⁾	> 1	GΩ
Capacitance at 1 MHz ³⁾	< 1.5	pF
Service life according to EPCOS		
10 operations 8/20 μs ⁶⁾	10	kA
10 operations 8/20 μs ⁷⁾	5	kA
10 operations 50 Hz; 1 s ⁶⁾	10	A _{rms}
10 operations 50 Hz; 1 s ⁷⁾	5	A _{rms}
Values after loading		
Insulation resistance at 50 V _{dc} ^{3) 8)}	> 10	MΩ
DC spark-over voltage ^{2) 3)}	65 ... 150	V
DC spark-over voltage ^{2) 4)}	65 ... 250	V
Impulse spark-over voltage		
at 1 kV/μs - for 99 % of measured values ³⁾	< 700	V
- for 99 % of measured values ⁴⁾	< 900	V
Activation after reflow soldering ⁹⁾		
1 operation U _{RMS} = 600 V; 1 s	2	A
Weight	~ 1.2	g
Operation and storage temperature	-40 ... +90	°C
Climatic category (IEC 60068-1)	40/ 90/ 21	
Marking, blue	EPCOS 90 YY O 90 - Nominal voltage YY - Year of production O - Non radioactive	

- 1) At delivery AQL 0.65 level II, DIN ISO 2859
 2) In ionized mode
 3) Tip or ring electrode to center electrode
 4) Tip to ring electrode
 5) After 1 day storage in darkness for 80 % of tubes
 6) Total current through center electrode, half value through tip respectively ring electrode
 7) Total current through center electrode, same value through tip respectively ring electrode
 8) For 80 % of tubes
 9) Total current from ring to tip electrode
 Terms in accordance with ITU-T Rec. K.12 and DIN 57845/VDE 0845

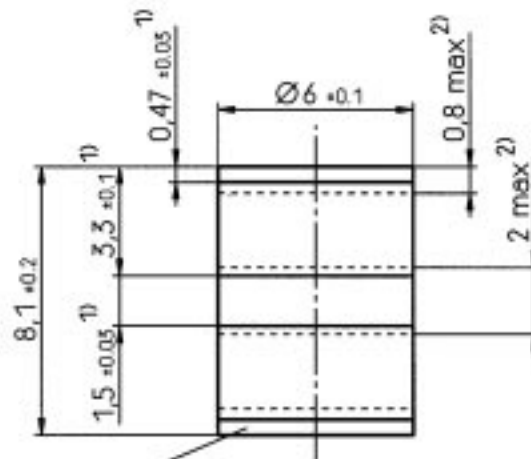

Elektroden müssen frei von Farbresten sein /
electrodes must be free of paint
Werkstoff / material OF - Cu F20
Oberfläche verzinkt / surface tin-plated > 7 µm

1) Fertigungsmaß ohne Oberfläche /
manufacturing dim. w/o plating

2) elektr.leitfähige Bereiche /
conductive areas



Schichtdicken-Meßpunkt

Teilkreis Ø5 ± 0.1

measuring point of
plating thickness Ø5 ± 0.1

Oberfläche mattverzinkt, bleifrei
surface dull tin-plated, lead free

Zinnschichtdicke } (14 ± 7) µm
thickness of tin

Test :

AQL 0.65

Niv. S - 3 (einfach / single)

Not to scale

Dimensions in mm

Non controlled document



中发网 WWW.ZFA.CN

全球最大的PDF中文下载站



中发网
www.zfa.cn

PDF 资料下载尽在中发网