


Overcurrent Protection	B5988*
Leaded Disks, Coated, 380 V, 500 V	C 884 ... C 886

Applications

- Overcurrent and short-circuit protection

Features

- Lead-free terminals
- Manufacturer's logo and type designation stamped on in white
- UL approval to UL 1434 with $V_{max} = 230\text{ V}$ and $V_N = 220\text{ V}$ (file number E69802)

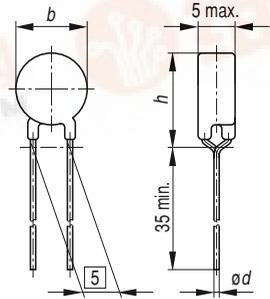

TPT0648-4

Options

- Leadless disks and leaded disks without coating available on request
- Also available on tape (to IEC 60286-2)

Dimensions (mm)

Type	b_{max}	$\varnothing d$	h_{max}
C 884	6,5	0,6	10,0
C 885	6,5	0,6	10,0
C 886	6,5	0,6	10,0

Delivery mode

- Cardboard strips (standard)
- Cardboard tape reeled or in AMMO pack on request

General technical data

Switching cycles (typ.)	N	100	
Resistance tolerance	ΔR_N	$\pm 25\%$	
Operating temperature range ($V = 0$)	T_{op}	$-40/+125$	$^{\circ}\text{C}$
	T_{op} ($V = V_{max}$)	$0/+60$	$^{\circ}\text{C}$

Electrical specifications and ordering codes


Type	I_N mA	I_S mA	I_{Smax} ($V = V_{max}$) A	I_r (typ.) ($V = V_{max}$) mA	R_N Ω	R_{min} Ω	Ordering code
$V_{max} = 420\text{ V}, V_N = 380\text{ V}, T_{Ref} = 120\text{ }^{\circ}\text{C}$ (typ.)							
C 884	21	39	0,2	3	600	340	B59884C0120A070
$V_{max} = 550\text{ V}, V_N = 500\text{ V}, T_{Ref} = 115\text{ }^{\circ}\text{C}$ (typ.)							
C 885	15	30	0,1	3	1200	675	B59885C0120A070
C 886	12	24	0,1	2	1500	840	B59886C0120A070






Characteristics (typical)


PTC resistance R_{PTC} versus
PTC temperature T_{PTC}
(measured at low signal voltage)

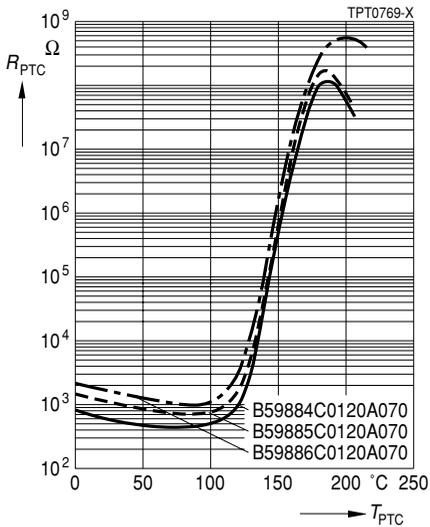


PTC current I_{PTC} versus PTC voltage V_{PTC}
(measured at 25 °C in still air)

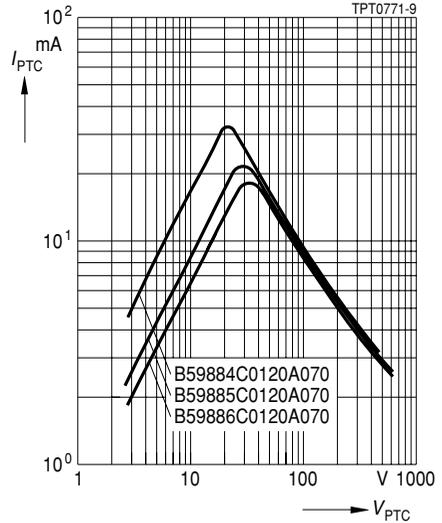

Switching time t_S versus switching current I_S
(measured at 25 °C in still air)

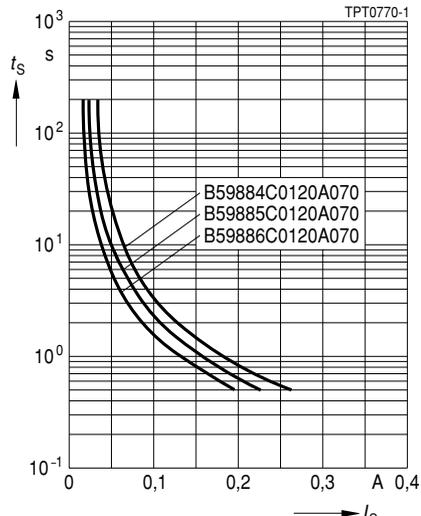

Rated current I_N versus ambient temperature T_A
(measured in still air)

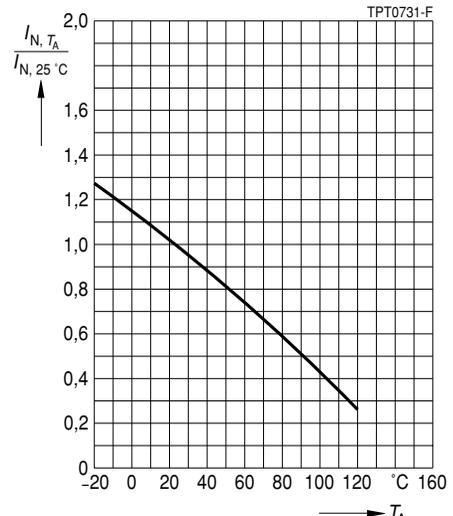

oder an unsere Vertriebsgesellschaften im Ausland. Bauelemente können aufgrund technischer E halten. Auskünfte darüber bitten wir unter Angabe des betreffenden Typs ebenfalls über die zuständ zuholen.

Published by EPCOS AG

Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY

☎ ++49 89 636 09, FAX (089) 636-2 26 89

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the informa EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association).

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or tives.

Due to technical requirements components may contain dangerous substances. For information o also contact one of our Sales Offices.



中发网 WWW.ZFA.CN

全球最大的PDF中文下载站



中发网
www.zfa.cn

PDF 资料下载尽在中发网