



PINS AND SNAP RINGS
SEE NOTE 2 _____


WIRE CRIMP				TERMINAL CRIMP HEIGHT
CRIMP SYMBOL	DIM	GO	NO GO	
22-20	F	0348	0388	0415
	D	0432	0464	.0375
18-16	F	0479	0519	0525
	D	0574	0607	.0495

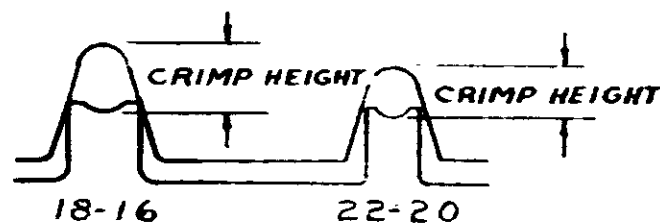

INSULATION CRIMP				TERMINAL CRIMP HEIGHT
CRIMP SYMBOL	DIM	GO	NO GO	
22-20	0	.0615	0705	0715 / .685
18-16	0	.0955	1045	1055 / .965

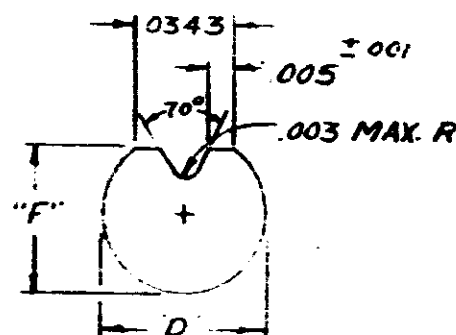

WIRE CRIMP
22-20

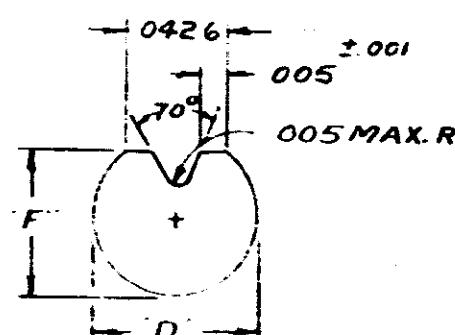



WIRE CRIMP
18-16

ENLARGED END VIEW OF GAGES


- 1 CRIMP GAGE DIMENSIONS APPLY WHEN TOOL IS CLOSED OR BOTTOMED BUT NOT UNDER PRESSURE.
- 2 FOR REPLACEMENT OF PARTS SUCH AS PINS AND SNAP RINGS ORDER REPAIR KIT NO. 1252-B-7.
- 3 FOR REPLACEMENT OF PARTS OTHER THAN PINS AND SNAP RINGS, TOOL IS TO BE RETURNED TO AMP INC., HARRISBURG, PENNA. TO INSURE PROPER CERT. CRIMP ADJUSTMENT.
- 4 FOR TOOL USAGE, SEE INSTRUCTION SHEET NO. 7070.
- 5 HAND TOOL CAN BE CHECKED BY MEASURING TERMINAL CRIMP HEIGHT.

[illegible]


INACTIVE 12/8/77

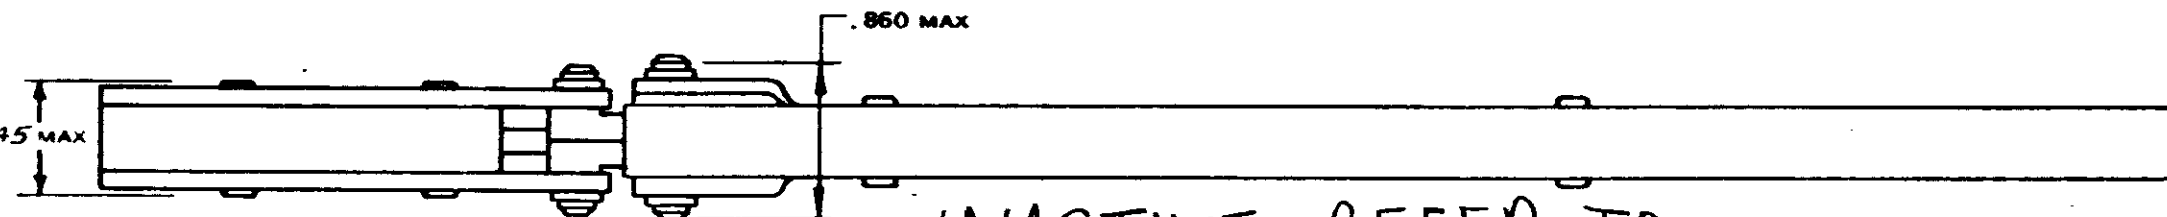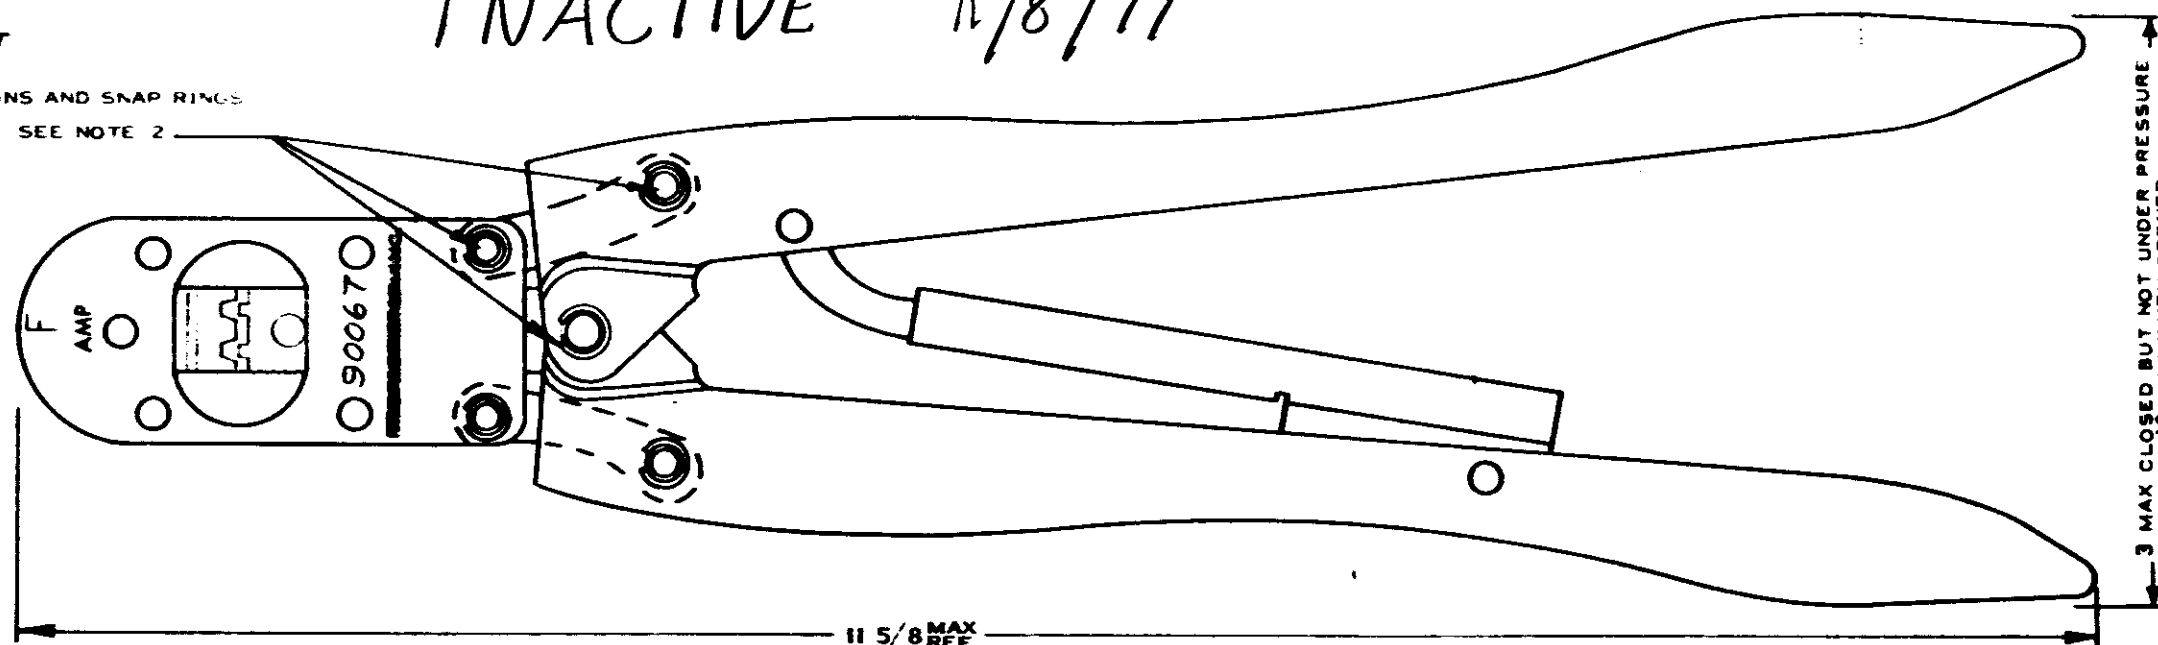

INACTIVE, REFER TO
IS SHEET 7070 11/8/77



**SIDE VIEW
OF GAGE**

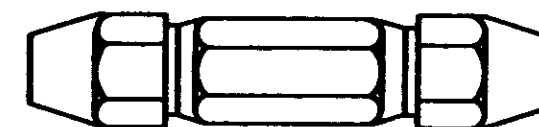

DOUBLE END HANDLE A.G.D. STD

INSULATION CRIMPS

SUGGESTED GAGE DESIGN

INACTIVE

© 1963 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.		CUSTOMER COPY REFERENCE ONLY	
DR <i>By E. H. 1-23-63</i>	MATERIAL AND FINISH 	AMP INCORPORATED HARRISBURG, PENNA.	
CHK <i>1-23-63</i>	W RE - RANGE - INSULATION 	CLASS 	
DE <i>By E. H. 1-23-63</i>	TOLERANCE EXCEPT AS NOTED 	TYPE 	
APP <i>1-23-63</i>	NAME STRAIGHT ACTION HAND TOOL	LOG R	NO C-90067