


1N4933G – 1N4937G

快速玻钝二极管
FAST GPP DIODES

型 号 TYPE	最大反向 峰值电压 Maximum Peak Reverse Voltage	最大平均正向电流 Maximum Average Rectified Current @ Half-Wave Resistive Load 60Hz		最大正向浪涌电流 Maximum Forward Peak Surge Current @ 8.3ms Superimposed	最大反向漏电流 Maximum Reverse Current @ PRV @ T _A =25°C	最大正向电压 Maximum Forward Voltage @ T _A =25°C		最大反向 恢复时间 Maximum Reverse Recovery Time	外型尺寸 Package Dimensions
	PRV	I _O @ T _L		I _{FM} (Surge)	I _R	I _{FM}	V _{FM}	T _{rr}	
	V _{PK}	A _{AV}	°C	A _{PK}	µA _{dc}	A _{PK}	V _{PK}	ns	
1N4933G	50	1.0	55	30	5.0	1.0	1.2	150	DO-41
1N4934G	100								
1N4935G	200								
1N4936G	400								
1N4937G	600								

T_{rr}测试条件: I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A

T_{rr} Test Conditions: I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A

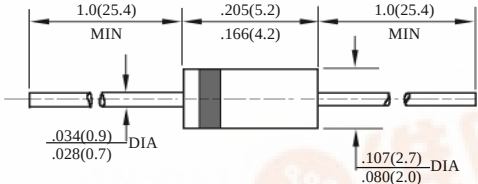


DO – 41

1N4933G-1N4937G

快速 GPP 二极管额定值与特性曲线

RATING & CHARACTERISTIC CURVES OF FAST GPP DIODE

FIG.1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

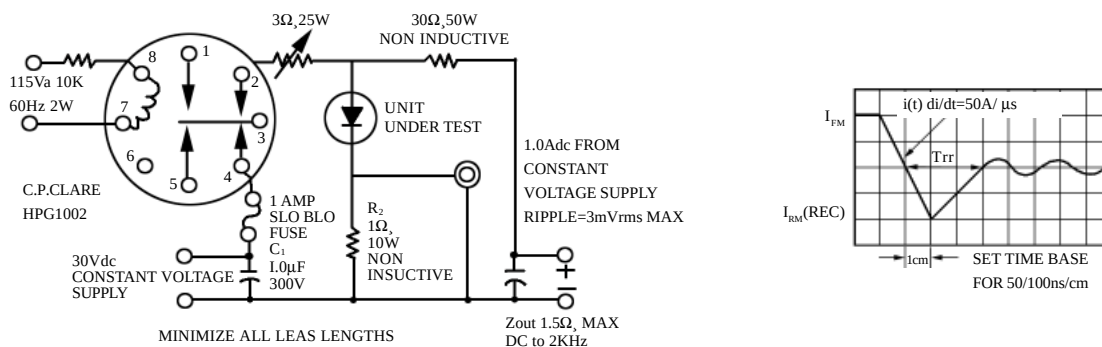

A TEKTRONIX 545A.K PLUG IN PRE AMP

P6000 PROBE OR EQUIVALENT

R₁ ADJUSTED FOR 1.4 Ω, BETWEEN
POINT 2 OF RELAY AND RECTIFIER

INDUCTIVE = 38μH

R₂ TEN 1W 10Ω, % CARBON CORE

IN PARALLEL

T_A 25 °C FOR RECTIFIER

FIG.3-TYPICAL FORWARD CHARACTERISTICS


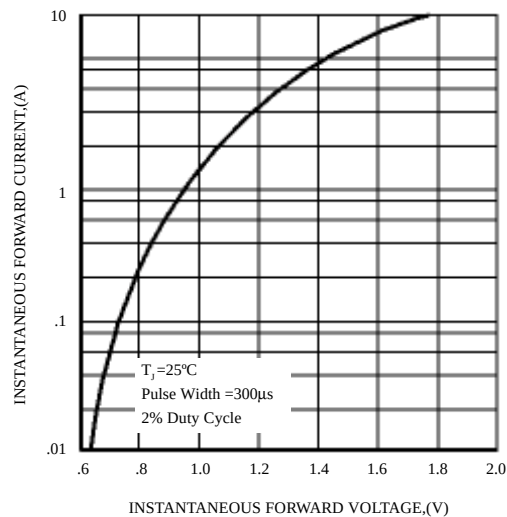


FIG.4-TYPICAL JUNCTION CAPACITANCE

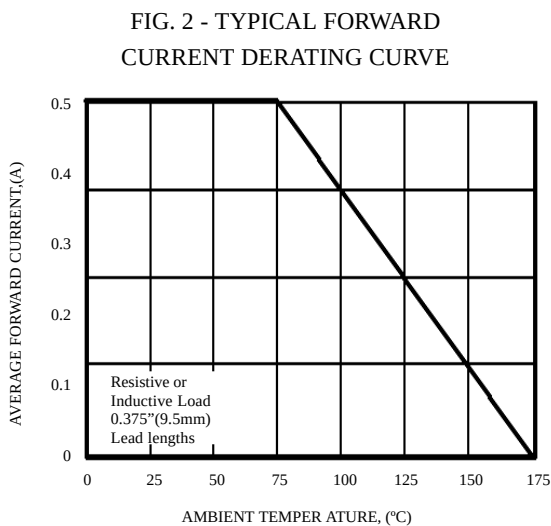