


2.0A SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIER

Features

- Glass Passivated Die Construction
- High case dielectric strength
- High surge current capability
- Ideal for printed circuit board

Mechanical Data

- Terminal: Plated leads solderable per MIL-STD 202E, Method 208C
- Case: UL-94 Class V-0 recognized Flame Retardant Epoxy
- Polarity: Polarity symbol marked on body
- Mounting Position: Any

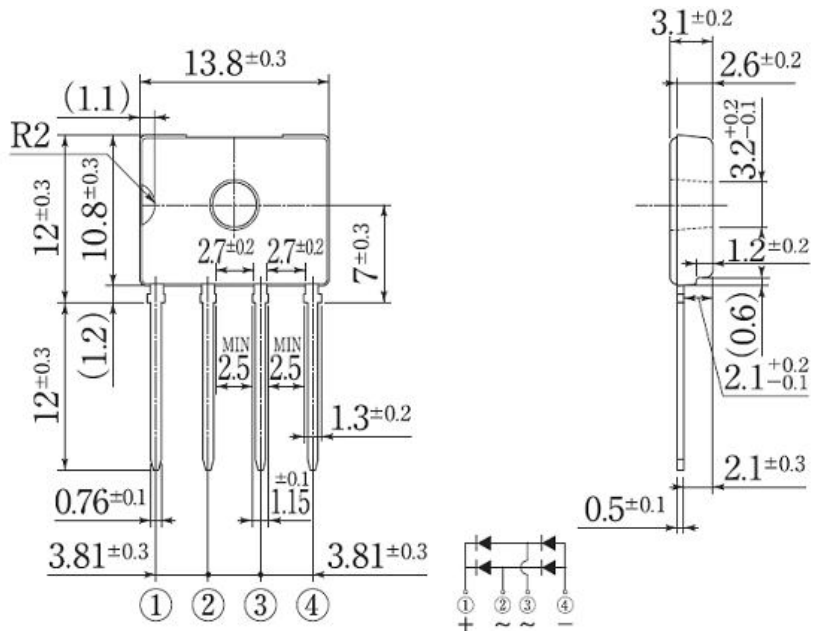

Maximum Ratings and Electrical Characteristics @TA=25°C unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	UG2KB 05	UG2KB 10	UG2KB 20	UG2KB 40	UG2KB 60	UG2KB 80	UG2KB 100	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average forward output rectified current	I (AV)	2.0							A
Peak forward surge current 8.3ms single sine-wave superimposed on rated load(JEDEC Method)	IFSM	50							A
Maximum instantaneous forward voltage drop per diode @2.0A	VF	1.1							V
Maximum DC reverse current at TA=25℃ rated DC blocking voltage per leg TA=125℃	IR	5.0 500							uA
Typical thermal resistance per leg	R θ JA	55							℃/W
	R θ JL	15							
Operating junction temperature range	TJ	-55 to +150							℃
storage temperature range	Tstg	-55 to +150							℃

Note:

2.0A SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIER

FIG.1- DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

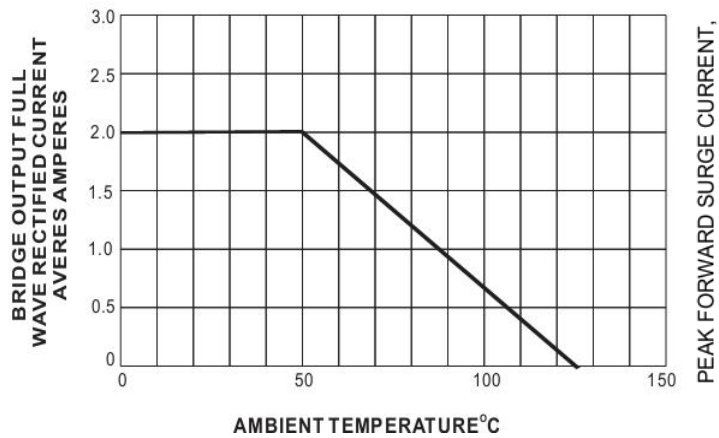


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

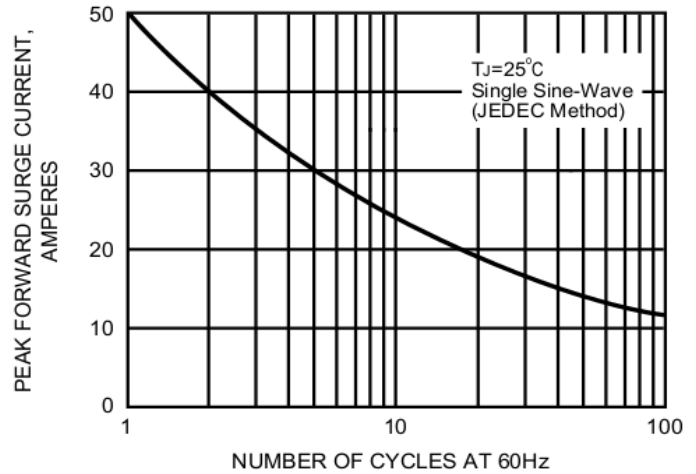


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

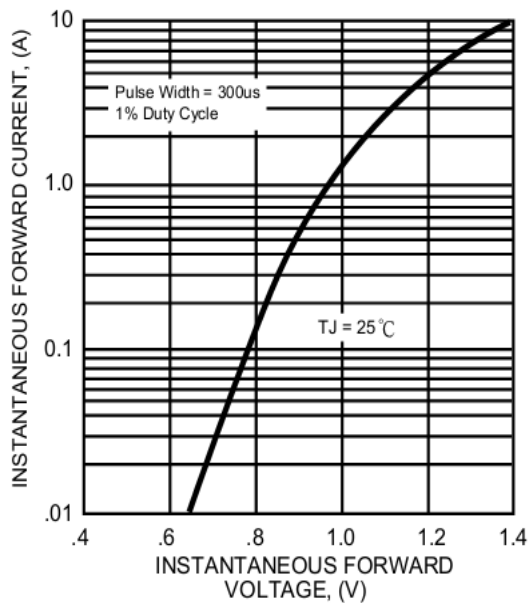


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

