

SK52B THRU SK5AB

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 V


Forward Current - 5 A

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- For surface mount applications
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- Low profile package
- Built-in strain relief, ideal for automated placement
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

Mechanical Data

- **Case:** JEDEC SMB (DO-214AA) molded plastic body
- **Terminals:** solder plated, solderable per MIL-STD-750, method 2026
- **Polarity:** color band denotes cathode end

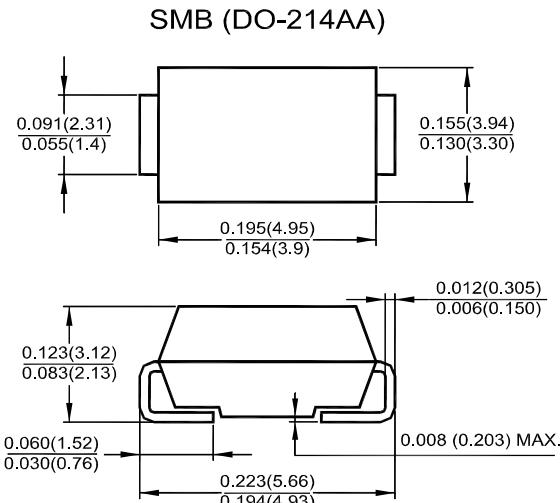

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, resistive or inductive load. For capacitive load, derate by 20 %.

Parameter	Symbols	SK52B	SK53B	SK54B	SK55B	SK56B	SK58B	SK5AB	Units				
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	V				
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	57	71	V				
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	100	V				
Maximum Average Forward Rectified Current 0.375" (9.5 mm) Lead Length	I _{F(AV)}	5						A					
Peak Forward Surge Current, 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	150						A					
Maximum Forward Voltage at 5 A ¹⁾	V _F	0.55		0.75		0.85		V					
Maximum DC Reverse Current T _a = 25 °C at Rated DC Blocking Voltage T _a = 100 °C	I _R	0.5						mA					
		20											
Typical Thermal Resistance ²⁾	R _{θJA} R _{θJL}	55 17						°C/W					
Operating and Storage Temperature Range	T _j , T _{stg}	- 55 to + 150						°C					

¹⁾ Pulse test: 300 µs pulse width, 1% duty cycle

²⁾ P.C.B mounted 0.55 X 0.55" (14 X 14 mm) copper pad areas

TOP DYNAMIC



Dated: 14/07/2012 J B Rev: 02

SK52B THRU SK5AB

FIG.1-FORWARD CURRENT DERATING CURVE

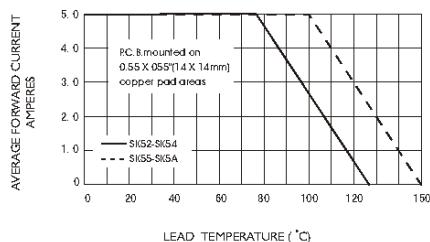


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

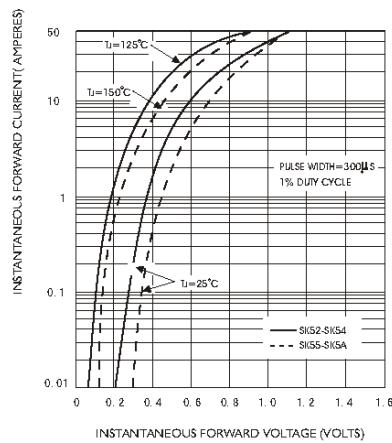


FIG.5-TYPICAL JUNCTION CAPACITANCE

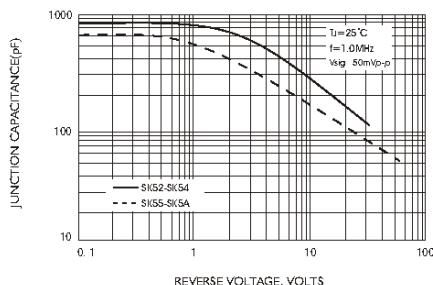


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

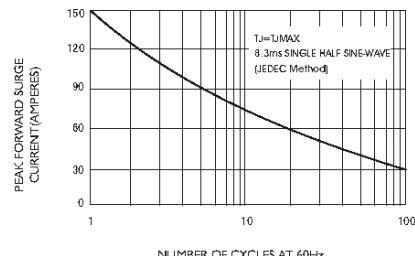


FIG.4-TYPICAL REVERSE CHARACTERISTICS


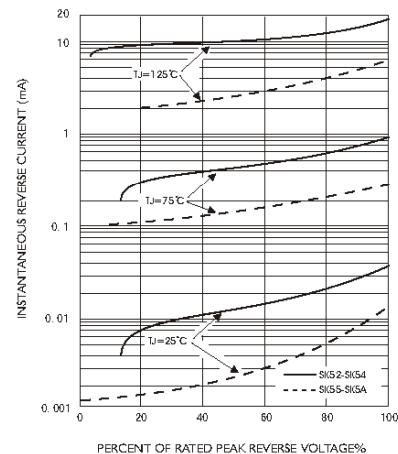


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE



TOP DYNAMIC

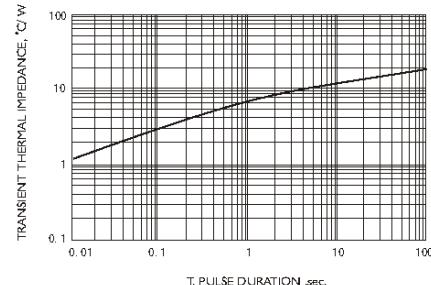

Dated: 14/07/2012 J B Rev: 02