

查询A82-1供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货




维库电子市场网  
WWW.DZSC.COM

维库电子市场网  
WWW.DZSC.COM


Characteristics	Typical	Guaranteed	
		0° to 50°C	-54° to +85°C
Frequency			
Small Signal Gain (min.)			
Gain Flatness (max.)			
Reverse Isolation			
Noise Figure (max.)			
Power Output @ 1 dB comp. (min.)			
IP3			
IP2			
Second Order Harmonic IP			
VSWR Input / Output (max.)			
DC Current @			

### Typical Performance @ 25°C


Gain vs. Temperature




Noise Figure

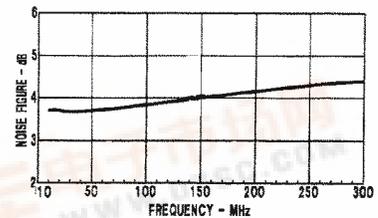


Output Power vs. Temperature \*



Intercept Points

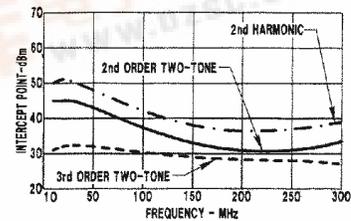

Input/Output VSWR

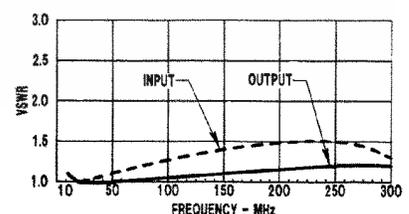

### Absolute Maximum Ratings

- Storage Temperature
- Max. Case Temperature
- Max. DC Voltage
- Max. Continuous RF Input Power
- Max. Short Term RF Input Power (1 minute max.)
- Max. Peak Power (3 μsec max.)
- “S” Series Burn-in Temperature (Case)

### Thermal Data: $V_{cc} = 15 \text{ Vdc}$

- Thermal Resistance  $\theta_{jc}$
- Transistor Power Dissipation  $P_d$
- Junction Temperature Rise Above Case  $T_{jc}$

### Outline Drawings

Package	TO-8	Surface Mount	SMA Connectorized
Figure			

