


Figure 1 shows the front view of the device with the following dimensions:

- Overall height: 1.00 [25.4]
- Overall width: 0.42 [10.7]
- SEE NOTE 5 (pointing to the top of the component)


PANDUIT PART NUMBER*	WEIGHT lbs/100 pcs (g)/100 pcs	USE WITH ANY OF THESE CABLE TIE CROSS-SECTIONS
ABM100-A	0.26 (119)	M, I, S SG200, SG250, SG300

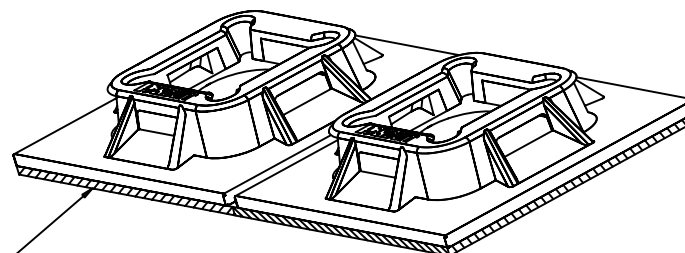

NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY
PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE.
AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH
THESE MOUNTS MAY BE APPLIED AND/OR THE SURFACE
TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

-ADHESIVE BACKING: RUBBER BASED ADHESIVE PRESSURE SENSITIVE FOAM TAPE 0.04 [1.0] THICK WITH A PROTECTIVE LINER. MOUNT IS DESIGNED TO SUPPORT 0.50 lbs (227g) MAX. WEIGHT ON A CLEAN DRY SMOOTH SURFACE.

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND COLOR.
2. THE '-A' SUFFIX REPRESENTS RUBBER ADHESIVE.
3. SUPPLIED IN STRIPS OF TWO.
4. MOUNT HAS A MAXIMUM CONTINUOUS OPERATING TEMPERATURE OF 120°F (49°C).
5. HOLE FOR STANDARD S6 FLAT HEAD SCREW.

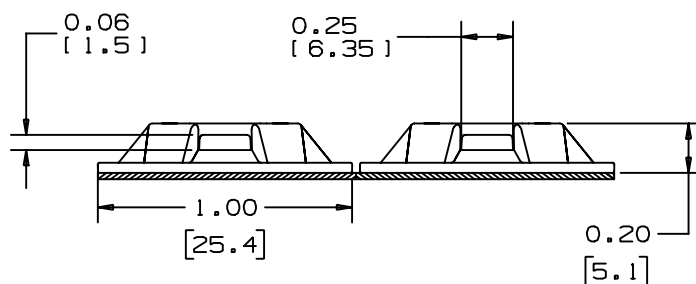

CAD FILENAME/LAYERS

G00033BA_DC_ABM100A_06

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

ABM100-A
FOUR-WAY MOUNT

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± 0.05 (1.3) (.XXX) ± 0.010 (0.25)
(.XX) ± 0.02 (0.5) ANGLES $\pm 5^\circ$

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY MJK	DATE 11/11/11
-----------------	------------------

MAT'L:

SCALE	NONE
-------	------

DATE	12/09/92
------	----------

NYLON 6/6

DRAWING NO.
GB0033BA

DWG
A
SIZE

6	8-24-05	TMSA		REMOVED PART NUMBER ABM25	GB0033BA	6			
REV	DATE	BY	CHK	DESCRIPTION	ECN - R		CUST	SUP	