

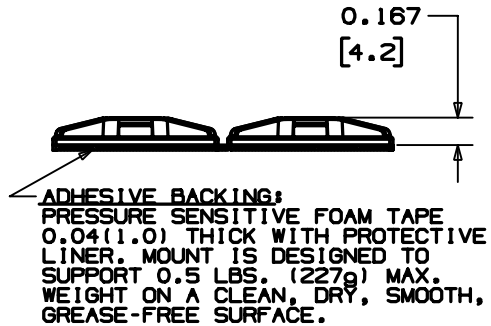


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

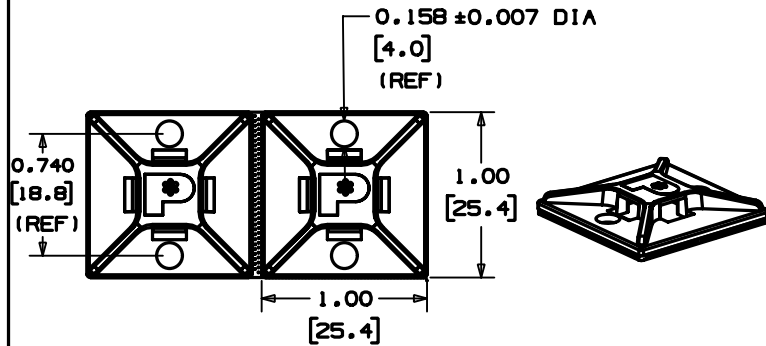

PANDUIT PART NUMBER*	USE WITH THESE CABLE TIE CROSS SECTIONS	WEIGHT lbs/100 pcs (g)/100 pcs
ABM2S-A	MINIATURE INTERMEDIATE STANDARD	0.23 (107)

NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE. AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

TO APPLY MOUNTS:

1. REMOVE MOUNT FROM THE PROTECTIVE LINER.
2. PLACE IN DESIRED LOCATION.
3. APPLY PRESSURE TO TOP SURFACE OF MOUNT.

NOTES:

- * 1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
2. MOUNTS PROVIDED IN STRIPS OF TWO FOR EASY REMOVAL FROM LINER.
3. MOUNT HAS CONTINUOUS OPERATION TEMPERATURE OF 120°F (49°C).

DIMENSIONS IN BRACKETS ARE METRIC (mm)

CAD FILENAMES/LAYERS

G00239CF_PB_ABM2S_09

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

ABM2S-A
ADHESIVE BACKED MOUNT

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± 0.05 (.3) (.XXX) ± 0.010 (.25)
(.XX) ± 0.02 (.5) ANGLES $\pm 5^\circ$

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY	M.
----------	----

	MAT'Ls
--	---------------

SCALE	NONE
-------	------

DATE	11/3/84
------	---------

ABS

DRAWING NO.

GB0239CF

DWG
A
8128

9	3/3/05	JAD		REMOVE ABM25	680239CF	9			
8	7/8/03	JAD		CHANGED TOLERANCE ON .203 AND .067 DIMENSION FROM .010 (.25) TO .015 (.38)	680239CF	8			
7	5/27/03	JAD		CORRECTED WINDOW WIDTH DIMENSION	680239CF	7			
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP		