


Cemented Wirewound Resistors

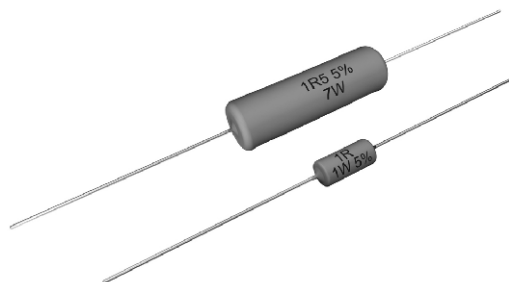

FEATURES

- All welded construction
- Ceramic core
- Non-flammable cement coating
- Tinned copper-clad iron leads
(see note 3 in the 12NC Ordering Code table)
- High power dissipation in small volume
- Ideal for pulse application
- Lead (Pb)-free


RoHS
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	HISTORICAL MODEL	$P_{40\text{ °C}}$ W	$P_{70\text{ °C}}$ W	TOLERANCE E24 SERIES ± %	LIMITING VOLTAGE V	RESISTANCE RANGE Ω		
						TCR = - 10...- 80 ppm/K	TCR = 100... 180 ppm/K	TCR = ± 100 ppm/K
AC01000	AC01	1	0.9	5	$\sqrt{P \times R}$	R10 - 33 R	36 R - 2K4	-
AC03000	AC03	3	2.5	5	$\sqrt{P \times R}$	R10 - 390 R	430 R - 3K3	3K6 - 5K1
AC04000	AC04	4	3.5	5	$\sqrt{P \times R}$	R10 - 620 R	680 R - 6K8	-
AC05000	AC05	5	4.7	5	$\sqrt{P \times R}$	R10 - 910 R	1K0 - 10 K	-
AC07000	AC07	7	5.8	5	$\sqrt{P \times R}$	R10 - 1K5	1K6 - 15 K	-
AC10000	AC10	10	8.4	5	$\sqrt{P \times R}$	R68 - 560 R	620 R - 27 K	-

12NC ORDERING CODE INDICATING RESISTOR TYPE AND PACKAGING

TYPE	ORDERING CODE 23... ..		
	BANDOLIER IN AMMOPACK		
	RADIAL	STRAIGHT LEADS	
	2500 units	500 units	1000 units
AC01	06 328 90...(2) (3)	-	06 328 33...
AC03 ⁽¹⁾	-	22 329 03...	-
AC04 ⁽¹⁾	-	22 329 04...	-
AC05 ⁽¹⁾	-	22 329 05...	-
AC07 ⁽¹⁾	-	22 329 07...	-
AC10	-	22 329 10...	-

Note

1. Products with bent leads and bulk packaging (100 pcs.) are available on request.
2. Last 3 digits available on request.
3. Radial parts with tin plated copper leads.

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: AC0300001509JAC00 (preferred part number format)

A **C** **0** **3** **0** **0** **0** **0** **0** **1** **5** **0** **9** **J** **A** **C** **0** **0**

MODEL	SPECIAL CHARACTER	TCR/MATERIAL	VALUE	TOLERANCE	PACKAGING	SPECIAL
(see Standard Electrical Specifications table)	0 = neutral 1 = RT 2 = SWI 3 = DK SP 20 mm 4 = DK LP 33 mm 5 = DK LP 17.8 mm 6 = NI 7 = DK LP 25.4 mm 9 = WSZ 6720 8 = DK SP 25.4 mm Z = value overflow (Special) A = E/K 22.5 mm	0 = standard	3 digit value 1 digit multiplier Multiplier: 7 = 10^{-3} 8 = 10^{-2} 9 = 10^{-1} 0 = 10^0 1 = 10^1 2 = 10^2 5 = 10^{-4}	J = $\pm 5.0\%$	(see Packaging table)	The 5 digit BV number will be encoded using a 36 character code. This code contains numbers 0...9 and letters A...Z (36 characters total) and allows to encode at least 46 655 five digit BV numbers. 00 = standard E0 = CECC E0 E6 = CECC E6


Historical Part Number example: AC03 15R 5 % AC (will continue to be accepted)

AC03	15R	5 %	AC
HISTORICAL MODEL	VALUE	TOLERANCE	PACKAGING

PACKAGING TABLE

SAP	DESCRIPTION	TYPE
AE	Bandolier in ammo pack, 2500 pcs	AC01RT
A1	Bandolier in ammopack straight leads, 1000 pcs	AC01
AC	Bandolier in ammopack straight leads, 500 pcs	AC03, AC04, AC05, AC07, AC10
LC	Loose 500 pcs	AC03 DK, AC04 DK, AC05 DK
LB	Loose 250 pcs	AC07
BM	Blister 1250 pcs	AC03
LK	Loose 300 pcs	AC10

DIMENSIONS

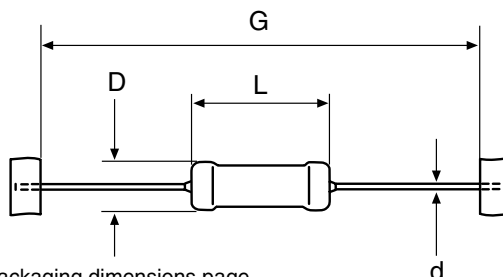



For packaging dimensions see separate packaging dimensions page.


DIMENSIONS - resistor types, mass and relevant physical dimensions

MODEL	DIMENSIONS in millimeters [inches]				
	D max	L max	d	G	WEIGHT g PER 100 UNITS
AC01	4.3 [0.169]	11 [0.433]	0.8 $\pm$ 0.03 [0.031 $\pm$ 0.001]	63 $\pm$ 1 [2.480 $\pm$ 0.039]	52
AC03	4.8 [0.189]	13 [0.512]		63 $\pm$ 1 [2.480 $\pm$ 0.039]	75
AC04	5.5 [0.217]	15.8 [0.622]		63 $\pm$ 1 [2.480 $\pm$ 0.039]	110
AC05	7.5 [0.295]	17 [0.669]		63 $\pm$ 1 [2.480 $\pm$ 0.039]	190
AC07	7.5 [0.295]	25 [0.984]		73 $\pm$ 1 [2.874 $\pm$ 0.039]	260
AC10	8.0 [0.315]	44 [1.732]		88 $\pm$ 1 [3.465 $\pm$ 0.039]	450


PERFORMANCE

TEST	TEST RESULTS
Climatic category	40/200/56
Damp heat, steady state 56d	$\frac{\Delta R}{R}_{\max} : \pm 5 \% + 0.1 \Omega$
Storage 1000 hours, 200 °C, no load	$\frac{\Delta R}{R}_{\max} : \pm 5 \% + 0.1 \Omega$
Climatic sequence	$\frac{\Delta R}{R}_{\max} : \pm 1 \% + 0.05 \Omega$
Load life 1000 h	$\frac{\Delta R}{R}_{\max} : \pm 5 \% + 0.1 \Omega$
Resistance to soldering heat	$\frac{\Delta R}{R}_{\max} : \pm 0.5 \% + 0.05 \Omega$
Robustness of termination, 10N	$\frac{\Delta R}{R}_{\max} : \pm 0.5 \% + 0.05 \Omega$
Short time overload, 10 x rated power for 5 seconds	$\frac{\Delta R}{R}_{\max} : \pm 2 \% + 0.1 \Omega$

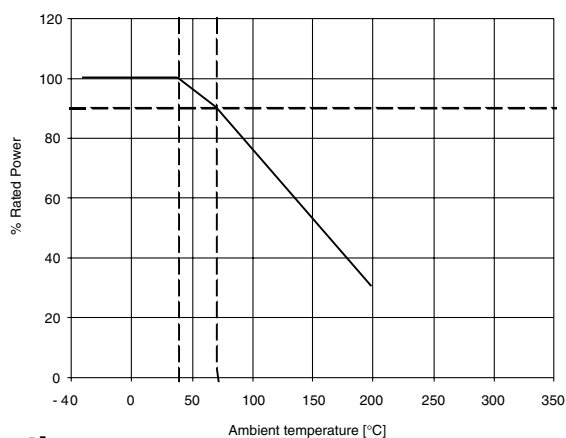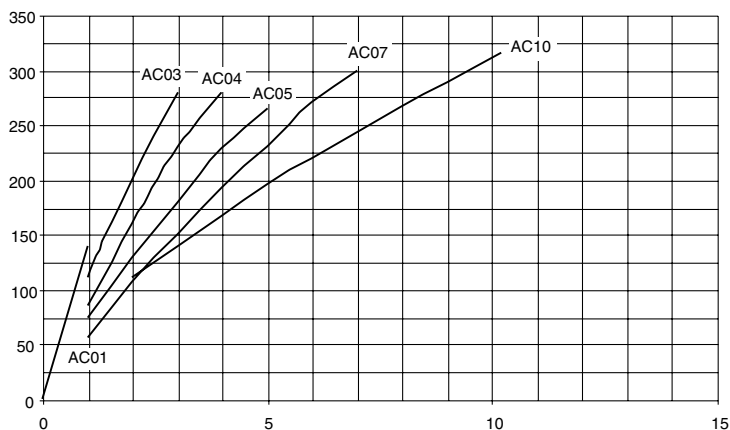
FUNCTIONAL PERFORMANCE**Derating****Temperature Rise**

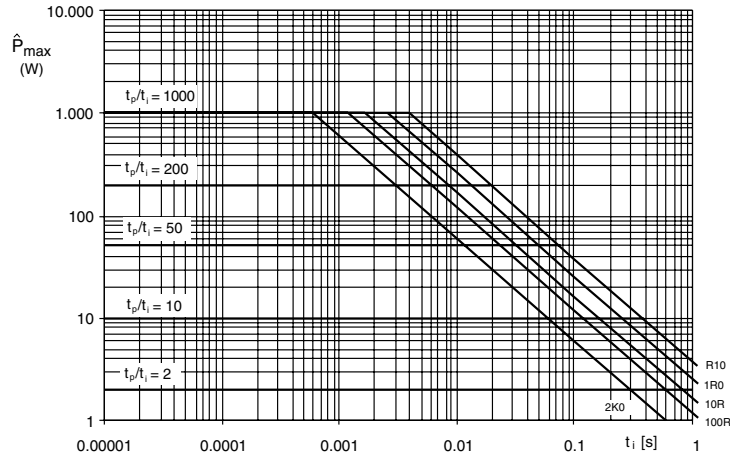


AC01 Pulse on a regular basis; maximum permissible peak pulse power ($\hat{P}_{max}$) as a function of pulse duration (t_i).

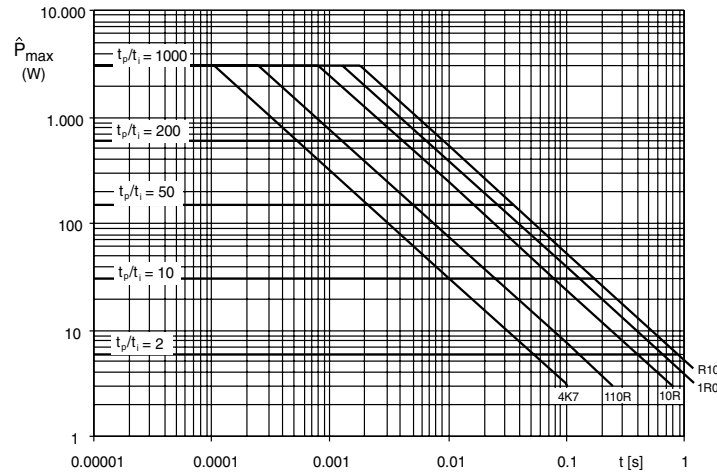


AC03 Pulse on a regular basis; maximum permissible peak pulse power ($\hat{P}_{max}$) as a function of pulse duration (t_i).

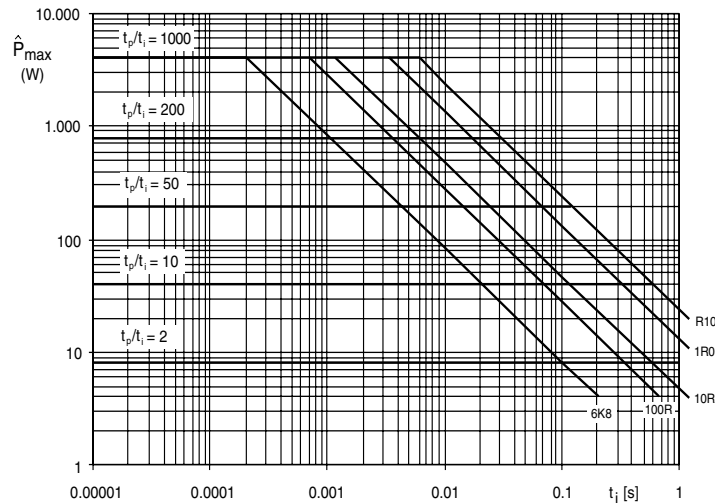


AC04 Pulse on a regular basis; maximum permissible peak pulse power ($\hat{P}_{max}$) as a function of pulse duration (t_i).

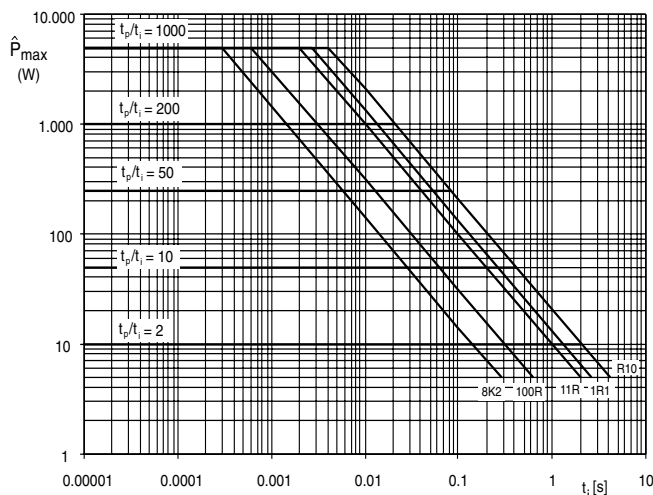


AC05 Pulse on a regular basis; maximum permissible peak pulse power ($\hat{P}_{max}$) as a function of pulse duration (t_i).

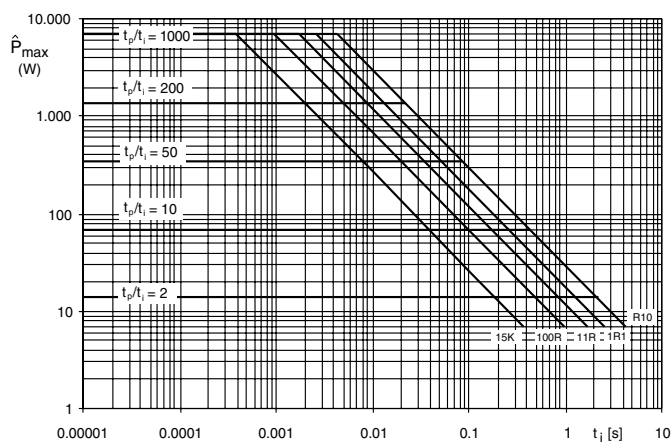


AC07 Pulse on a regular basis; maximum permissible peak pulse power ($\hat{P}_{max}$) as a function of pulse duration (t_i).

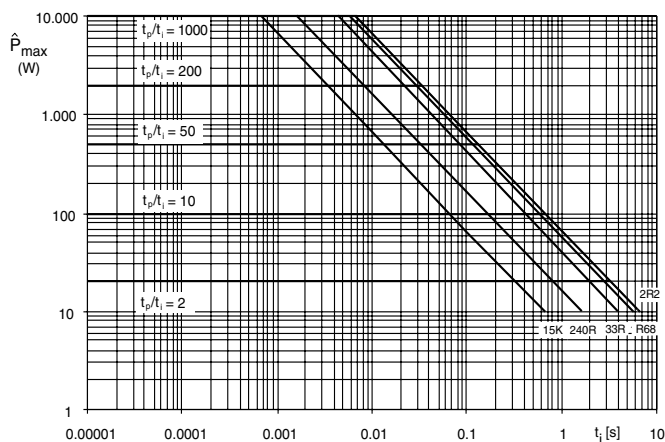


AC10 Pulse on a regular basis; maximum permissible peak pulse power ($\hat{P}_{max}$) as a function of pulse duration (t_i).

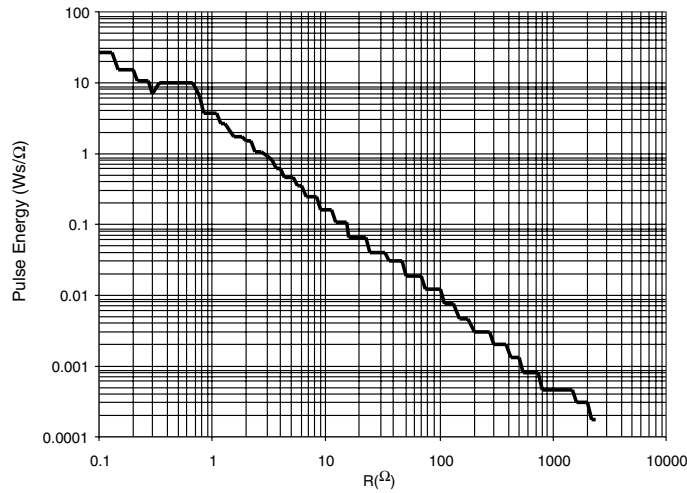


AC01 Pulse capability; E(Ws) as a function of R(Ω).

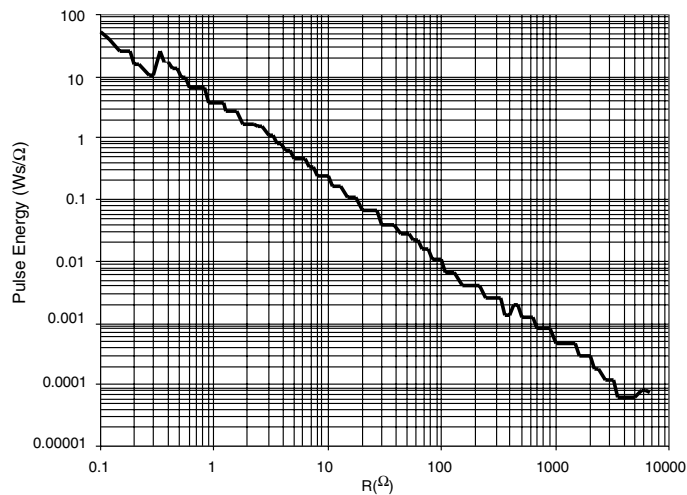


AC03 Pulse capability; E(Ws) as a function of R(Ω).

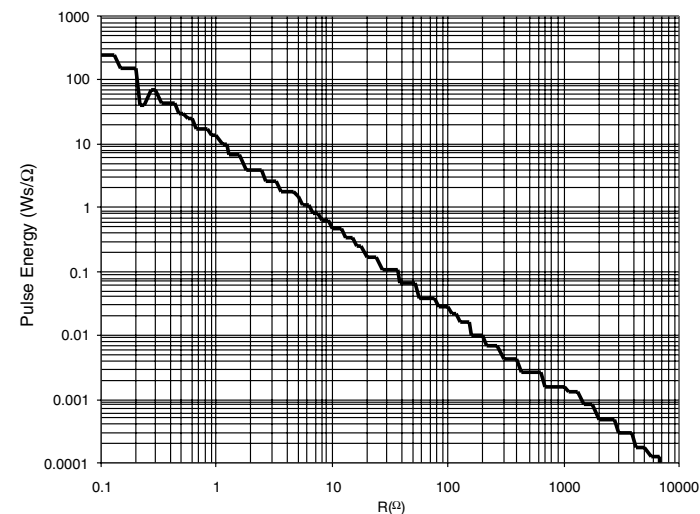


AC04 Pulse capability; E(Ws) as a function of R(Ω).

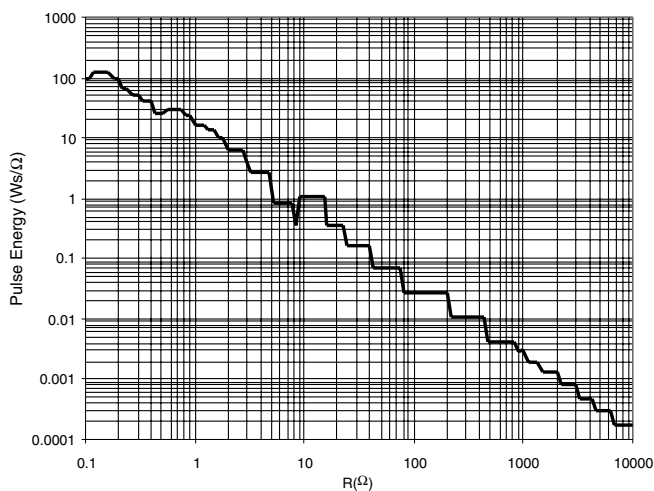

AC05 Pulse capability; $E(Ws)$ as a function of $R(\Omega)$.

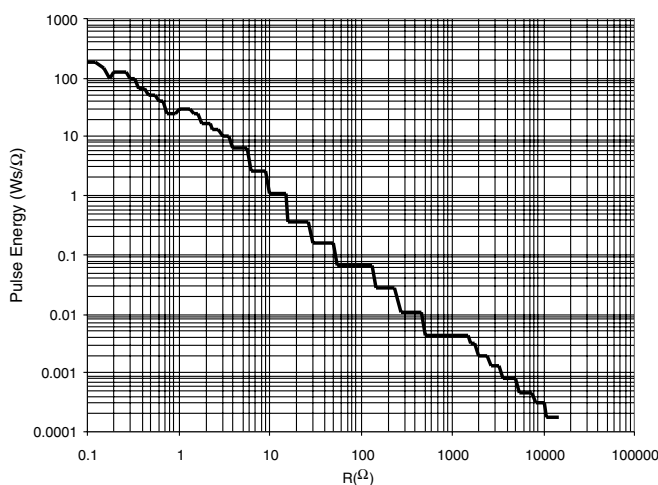

AC07 Pulse capability; $E(Ws)$ as a function of $R(\Omega)$.

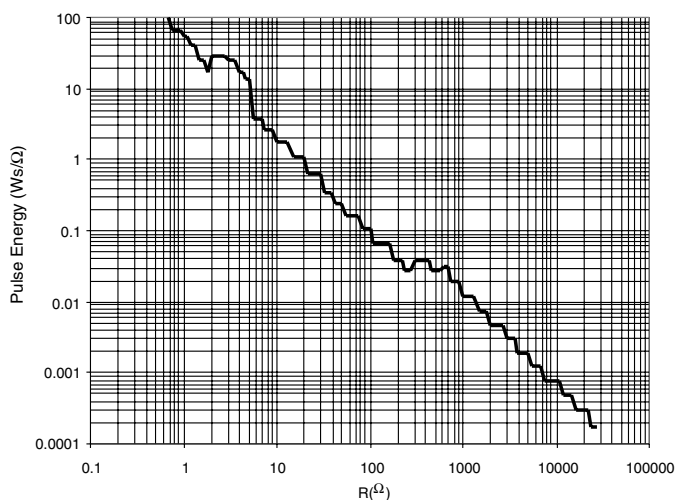

AC10 Pulse capability; $E(Ws)$ as a function of $R(\Omega)$.



ORDERING INFORMATION

Components may be ordered by using either a simple clear text ordering code, see "Type description and ordering code" or Vishay BCcomponents' unique 12NC.

Numeric ordering code (12NC)

- The resistors have a 12-digit ordering code starting with 23.
- The subsequent 7 digits indicate the resistor type, specification and packaging; see the 12NC Ordering Code table.
- The remaining 3 digits indicate the resistance value:
 - The first 2 digits indicate the resistance value.
 - The last digit indicates the resistance decade in accordance with the 12NC Indicating Resistance Decade table.

Last Digit of 12NC Indicating Resistance Decade

RESISTANCE DECADE	LAST DIGIT
0.1 Ω to 0.91 Ω	7
1 Ω to 9.1 Ω	8
10 Ω to 91 Ω	9
100 Ω to 910 Ω	1
1 k Ω to 9.1 k Ω	2
10 k Ω to 56 k Ω	3

Ordering Example

The ordering code of an AC01 resistor, value 47 k Ω supplied in ammpack of 1000 units is: 2306 328 33473.

Product specifications deviating from the standard values are available on request.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.