

**APPLIED
CONCEPTS INC.**

397 Route 281 - P.O. BOX 453
Tully, New York 13159-0453
Phone: (315) 696-6676 Fax: (315) 696-9923
www.acipower.com

AC7-12-1127

CCFL INVERTER
(For Dual Tube Applications)

PRODUCT DATA SHEET

8/7/00


The AC7-12-1127 is designed to drive 2 CCFLs to a nominal current level of 8.0mA.

Intensity control (0-100%) is accomplished by the user providing a variable dc level of 0V(off) to 5V(full-on) at pin 3 of CON1.

A +5V level is available at pin 4 of CON1 for powering the high-side of the intensity control potentiometer.

The lamp outputs are open and short circuit protected.

Meets nominal drive requirements for the LG Electronics LM151X2 - 15 inch LCD display.

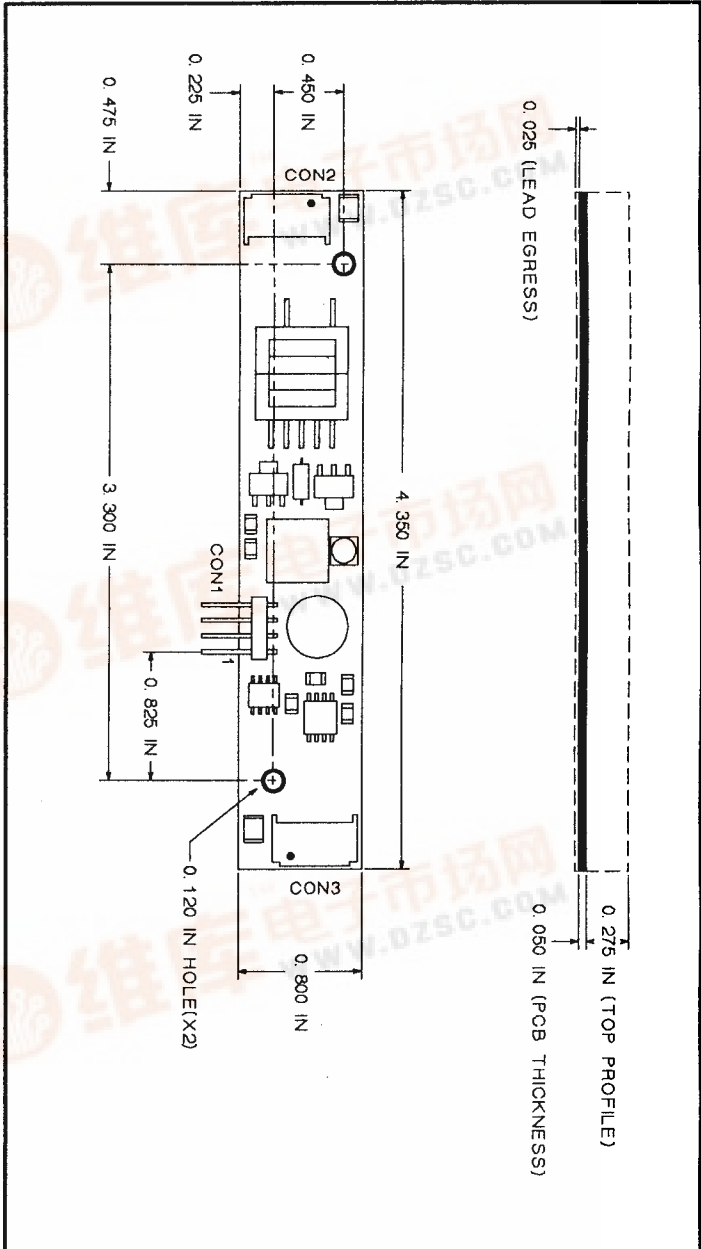

Specifications:

- Vin = +12V +/- 10%
- CCFL strike voltage = 1400Vrms @ Vin=12V
- CCFL tube current = 8.0mA/tube @ 100% intensity/Vin=12V)
- Recommended CCFL sustaining voltage = 400Vrms - 600Vrms
- Nominal tube current frequency = 75khz +/- 10%
- Nominal pwm frequency = 98Hz +/- 3%
- Pwm duty cycle range = 0 to 100%
- Average electrical efficiency >87%

Additional control capability:*

- Enable/Disable function
- Simple 1 or 2 button intensity control
- CDS ambient light sensor control
- Synchronization to display frame-rate capable
- Two-wire(variable resistance) intensity control
- Serial communication control

* Please contact factory for information

INPUT CONNECTOR		OUTPUT CONNECTOR	
CON1 MOLEX 22-28-8041		CON2/CON3 JST SM03X4 0JB-BHS-1-TB	
PIN #	FUNCTION	PIN #	FUNCTION
1	+VIN	1	CCFL HOT
2	GND	2	NC
3	VCNTL	3	CCFL COLD
4	+5V		

