

Schottky Barrier Diodes 40V

VRM (V)	Package	Part Number	IF (AV) (A)	IFSM (A)	Tj (°C)	Tstg (°C)	VF (V) max	IF (A)	IR (mA)	IR (H) (mA)	Rth (j-ℓ) Rth (j-c) (°C/W)	Mass (g)	Fig. No.	Page where characteristic curve is shown
				50Hz Half-cycle Sinewave Single Shot					VR=VRM max	VR=VRM max				
40	Surface Mount	SFPB-54	1.0	30	-40 to +150	0.55	1.0	1	50	100	20	0.072	1	82
		SFPB-64	1.5	60	-40 to +150	0.55	2.0	5	50	100	20	0.072		83
		SFPB-74	2.0	60	-40 to +150	0.5	2.0	5	50	100	20	0.072		—
		SPPE-64	2.0	40	-40 to +150	0.6	2.0	0.2	20	150 (Tj)	20	0.072	2	84
		SPB-G34S	3.0	50	-40 to +150	0.55	3.0	3.5	50	100	5	0.29		—
		SPB-G54S	5.0	60	-40 to +150	0.55	5.0	5	50	100	5	0.29		—
	Surface Mount Center-tap	SPB-64S	6.0	50	-40 to +150	0.55	3.0	3.5	50	100	5	0.29		
	Axial	AK 04	1.0	25	-40 to +150	0.55	1.0	1	50	100 (Tj)	22	0.13	3	85
		AW 04	1.0	25	-40 to +150	0.58	1.0	5	35	150	22	0.13		—
		AE 04	1.0	25	-40 to +150	0.6	1.0	0.1	10	150 (Tj)	22	0.13		—
		EK 04	1.0	40	-40 to +150	0.55	1.0	5	50	100	20	0.3	4	86
		EE 04 *	2.0	40	-40 to +150	0.6	2.0	0.2	20	150 (Tj)	20	0.3		—
		EK 14	1.5	40	-40 to +150	0.55	2.0	5	50	100	17	0.3	5	86
		RK 14	1.7	60	-40 to +150	0.55	2.0	5	50	100	15	0.45	6	87
		RK 34	2.5	50	-40 to +150	0.55	2.5	5	50	100	12	0.6	7	
		RK 44	3.0	80	-40 to +150	0.55	3.0	5	50	100	8	1.2	8	88
	Frame-2Pin	FMB-G14	3.0	60	-40 to +150	0.55	3.0	5	100	100	4	2.1	9	89
		FMB-G14L	5.0	60	-40 to +150	0.55	5.0	5	100	100	4	2.1		
		FMB-G24H	10.0	150	-40 to +150	0.55	10.0	10	65	100	4	2.1		
	Center-tap	MPE-24H	15	100	-40 to +150	0.6	7.5	0.75	50	150 (Tj)	2.5	1.04	10/10	85
		FMB-24	4.0	50	-40 to +150	0.55	2.0	5	35	100	4	2.1	11	90
		FMB-24M	6.0	60	-40 to +150	0.55	3.0	5	35	100	4	2.1		91
		FMW-24L	10.0	100	-40 to +150	0.55	5.0	5	175	150	4	2.1		90
		FMB-24L	10	60	-40 to +150	0.55	5.0	5	35	100	4	2.1	12	92
		FME-2104	10	80	-40 to +150	0.6	5.0	0.5	30	100	4	2.1		93
		FMB-34S	12	75	-40 to +150	0.58	6	5	35	100	2	5.5		94
		FMW-24H	15	120	-40 to +150	0.55	7.5	7.5	250	150	4	2.1	11	90
		FME-24H	15	100	-40 to +150	0.6	7.5	0.75	50	100	4	2.1		92
		FMB-24H	15	100	-40 to +150	0.55	7.5	7.5	50	100	4	2.1		90
		FMB-34	15	150	-40 to +150	0.55	7.5	10	65	100	2	5.5	12	93
		FMB-2204	20	150	-40 to +150	0.55	10	10	350	150	4	2.1	11	—
		FMW-2204	20	120	-40 to +150	0.55	10	10	350	150 (Tj)	4	2.1		81
		FMB-2304	30	150	-40 to +150	0.55	15	15	500	150	4	2.1		91
		FMB-34M	30	300	-40 to +150	0.55	15.0	20	100	100	2	5.5	12	93


★: Under development

Schottky Barrier Diodes 40V


External Dimensions

Flammability: UL94V-0 or Equivalent (Unit: mm)


1

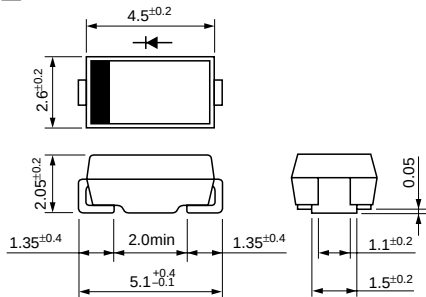


2

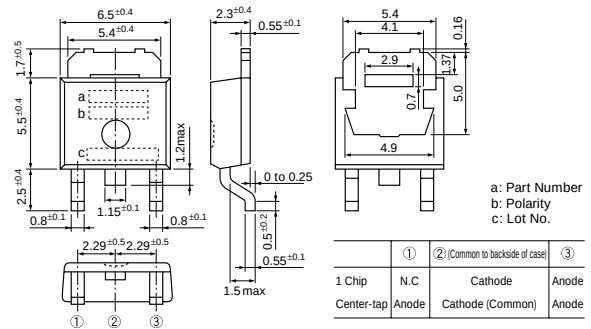


3




4




5




6




7




8




9




10




10'

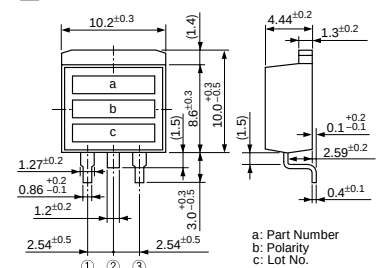

11







12






Characteristic Curves

Schottky Barrier Diodes




FME-220A







FME-230A



FMJ-23L



FMB-34



FMB-34M

