


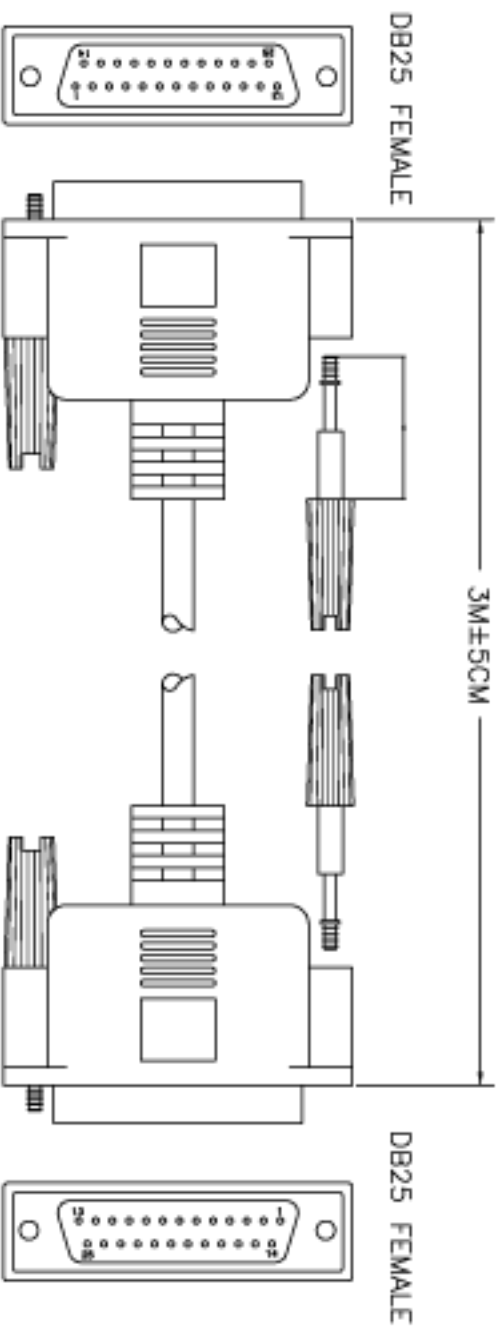

CONFIGURATION:
DB25F DB25F

- | | | |
|--------|-------|--------|
| 1 | _____ | 1 |
| 2 | _____ | 2 |
| 3 | _____ | 3 |
| 4 | _____ | 4 |
| 5 | _____ | 5 |
| 6 | _____ | 6 |
| 7 | _____ | 7 |
| 8 | _____ | 8 |
| 9 | _____ | 9 |
| 10 | _____ | 10 |
| 11 | _____ | 11 |
| 12 | _____ | 12 |
| 13 | _____ | 13 |
| 14 | _____ | 14 |
| 15 | _____ | 15 |
| 16 | _____ | 16 |
| 17 | _____ | 17 |
| 18 | _____ | 18 |
| 19 | _____ | 19 |
| 20 | _____ | 20 |
| 21 | _____ | 21 |
| 22 | _____ | 22 |
| 23 | _____ | 23 |
| 24 | _____ | 24 |
| 25 | _____ | 25 |
| SHIELD | _____ | SHIELD |

- MAT'L:
- 1.CABLE:#28 25C+1+AL/MY(BEIGE PVC JACKET) O.D:6.5mm
 - 2.BOTH CONNECTORS WITH NORMAL TYPE
 - 3.THUMBSCREW:#4-40UNC TYPE
 - 4.ALLOVER MOLDED WITH BEIGE PVC
- NOTE:
- 1.TOTAL LENGTH:3M±5CM
 - 2.COLOR:BEIGE
 - 3.MOLDED TYPE
 - 4.ROHS COMPLIANT

RoHS
Compliant

DATE	18 FEB,1998	PARTS NO	AK170 3M	TITLE:	DB25 FEMALE-DB25 FEMALE	DRAWN	Y.H.Y	CHECK	APPRO
UNIT	MM	DRAWN NO	AK1703M		(MD TYPE)		03/26		
SCALE		BUYER NO	002		AK170 3M	ASSMANN ELECTRONICS,INC.			