


LTR	REV.	DESCRIPTION	DATE
	C	ECN # 020920-1 ADD LENGTH	09/20/02

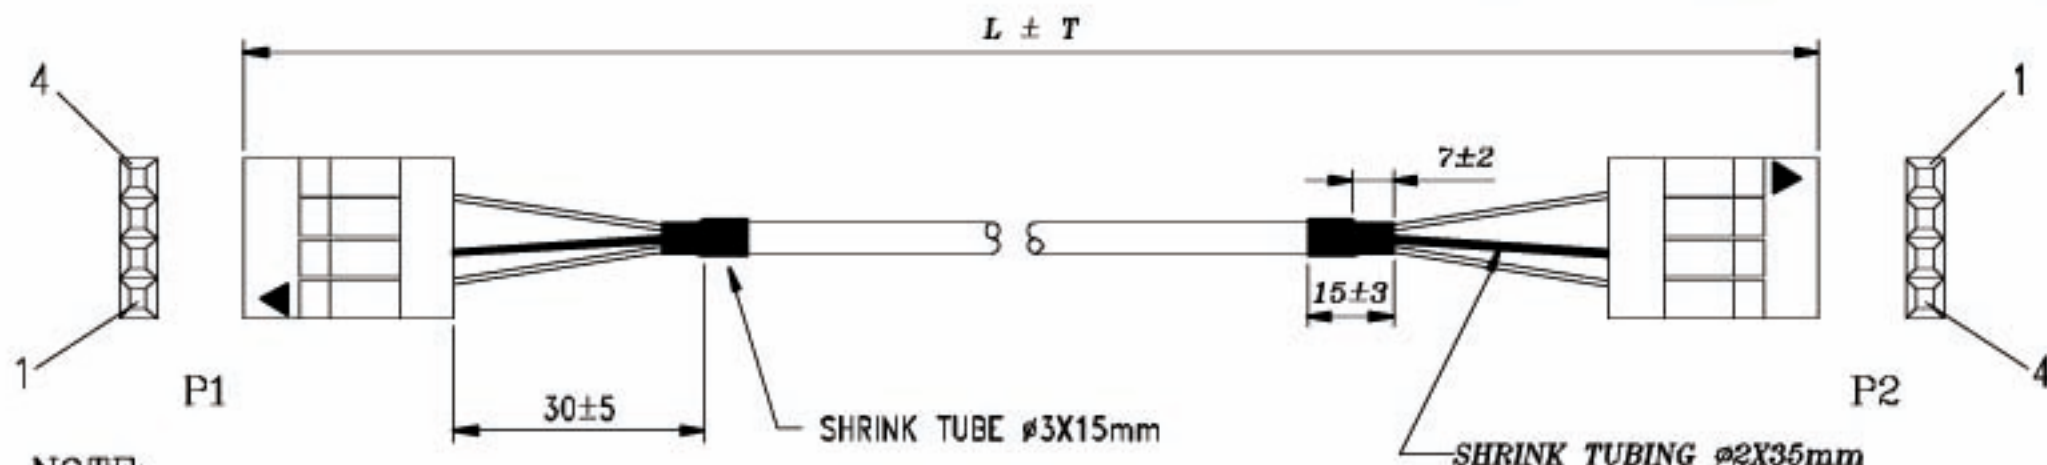

NOTE:

1.CABLE: UL-2547 28AWG(7/0.127 T.C)*2C
+SRIRAL(T.C),PVC JACKET O.D=ø3.0±0.2mm
COLOR: GRAY(NK-G01).

2.HOUSING & TERMINAL:

P1&P2: DU PONT COMPATIBLE EQUIVALENT
(COLOR: BLACK,PITCH: 2.54mm).

3.ELECTRICAL TEST:

100% OPEN SHORT MIS WIRE TEST.
CONTACT RESISTANCE 3 OHMS MAX
INSULATION RESISTANCE 20M OHMS MIN

4.PACKING: SEE P-0039 REV.C PACKING DRAWING
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

PIN OUT

P1		P2
4	WHITE	1
2	SPIRAL	3
1	RED	4

200-0056-3	AK 2525-085	4016032124641	850	20	DB VP2
200-0056-2	AK 2525 0.75M		750	20	DB VP2
200-0056-1	AK 2525 0.5M	4016032050087	500	20	DB VP2
DWG	P/N	EAN CODE	L (mm)	T (mm)	BLISTER

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw
11/1 06/21

Chck

Engr

ASSMANN Electronics

Title
CD ROM CABLE

Customer P/N **AK 2525**

App'd Customer **H-SEN**

Scale NONE Units m/m Third Angle Projection

Dwg No. **200-0056** REV:C Sheet **1/1**