

1

2

3

4

A

A

B

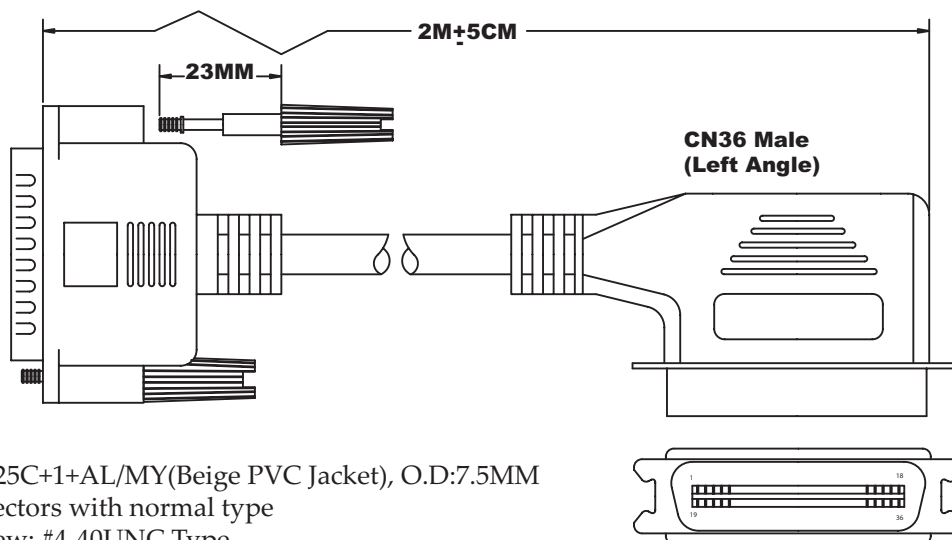

B

C

C

D

D

DB25 Male**Material:**

- 1.Cable:#28 25C+1+AL/MY(Beige PVC Jacket), O.D:7.5MM
- 2.Both connectors with normal type
- 3.Thumbscrew: #4-40UNC Type
- 4.Outter Molded with Beige PVC

Note:

- 1.Total Length:2M±5CM
- 2.Color:Beige
- 3.Molded Type

Buyer No:(AK525L) & (AK525-L2) S.M./85.1.13

Configuration:

DB25M	CN36M
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	32
16	31
17	36
18	33
19	19
20	21
21	23
22	25
23	27
24	29
25	30
Shield	Shield

Description

Name :

AK525L2M-R

DB25 Male-CN36 Male(Left)

ASSMANN
Electronic Components**RoHS**
Compliant

THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

1

2

3

4