



Micro Commercial Components
21201 Itasca Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

Features

- Silicon Epitaxial Planar Diodes
- For General Purpose
- This diode is also available in other case.

Mechanical Data

- Case: SOD-123, Molded Plastic
- Weight: approx. 0.01g
- Marking code: BAV19W=A8
BAV20W=T2
BAV21W=T3

Maximum Ratings

Symbol	Rating	Rating	Unit
V_R	Continuous Reverse Voltage	BAV19W 100	V
		BAV20W 150	
		BAV21W 200	
V_{RRM}	Repetitive Peak Reverse Voltage	BAV19W 120	V
		BAV20W 200	
		BAV21W 250	
I_F	Forward DC Current at $T_{amb}=25^{\circ}C^{(1)}$	250	mA
$I_{F(AV)}$	Rectified Current (Average) Half Wave Rectification with Resist. Load at $T_{amb}=25^{\circ}C^{(1)}$	200	mA
I_{FRM}	Repetitive Peak Forward Current at $f>50Hz$, $T_{amb}=25^{\circ}C^{(1)}$	625	mA
I_{FSM}	Surge Forward Current at $t<1s$, $T_j=25^{\circ}C$	1.0	A
P_{tot}	Power Dissipation at $T_{amb}=25^{\circ}C^{(1)}$	410	mW
R_{JA}	Thermal Resistance Junction to Ambient Air	375	mW
T_j	Junction Temperature	-55 to +150	$^{\circ}C$
T_{STG}	Storage Temperature	-55 to +150	$^{\circ}C$

Electrical Characteristics @ 25°C Unless Otherwise Specified


Symbol	Parameter	Min	Typ	Max	Units
V_F	Forward Voltage ($I_F=100mA$) ($I_F=200mA$)	---	---	1.00 1.25	V
I_R	Leakage Current ($V_R=100V$)	---	---	100	nA
	($V_R=100V$, $T_j=100^{\circ}C$)	---	---	15	uA
	($V_R=150V$)	---	---	100	nA
	($V_R=150V$, $T_j=100^{\circ}C$)	---	---	15	uA
	($V_R=200V$)	---	---	100	nA
	($V_R=200V$, $T_j=100^{\circ}C$)	---	---	15	uA
r_f	Dynamic Forward Resistance ($I_F=10mA$)	---	5.0	---	OHM
C_{tot}	Capacitance ($V_R=0$, $f=1.0MHz$)	---	1.5	---	pF
t_{rr}	Reverse Recovery Time ($I_F=30mA$, $I_R=30mA$) ($I_{rr}=3.0mA$, $R_L=100OHMS$)	---	---	50	ns

*(1) Valid provided that leads are kept at ambient temperature

BAV19W THRU BAV21W


410mW Small Signal Diodes 120 to 250 Volts

SOD123

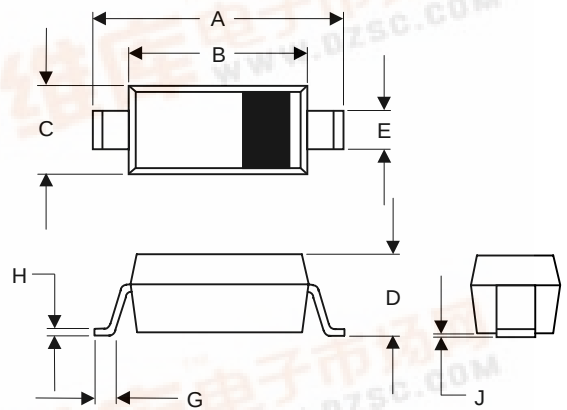

DIMENSIONS					NOTE
DIM	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.140	.152	3.55	3.85	
B	.100	.112	2.55	2.85	
C	.055	.071	1.40	1.80	
D	----	.053	----	1.35	
E	.012	.031	0.30	.78	
G	.006	----	0.15	----	
H	----	.01	----	.25	
J	----	.006	----	.15	


SUGGESTED SOLDER PAD LAYOUT

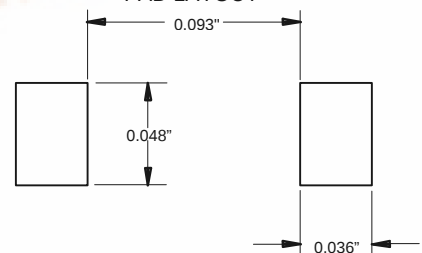

BAV19W thru BAV21W




Forward characteristics

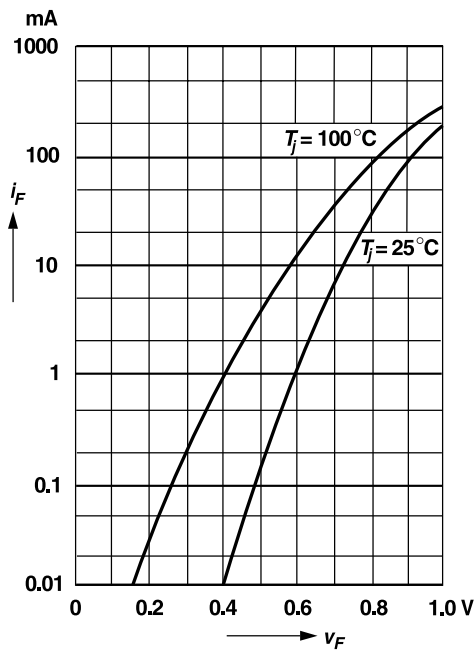


Admissible forward current versus ambient temperature

Valid provided that electrodes are kept at ambient temperature

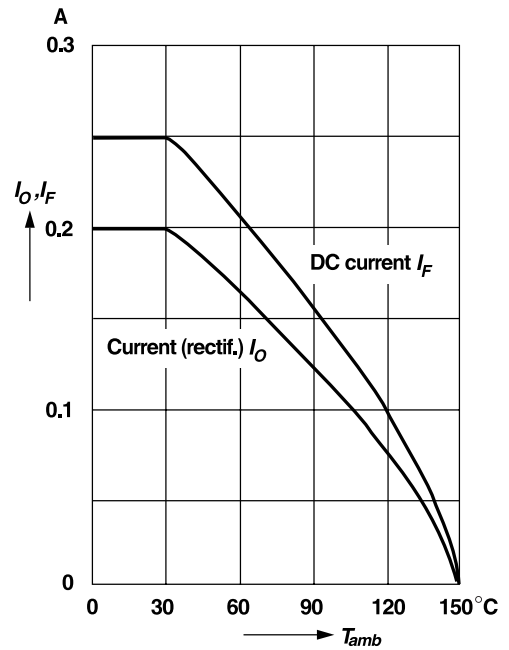


Admissible power dissipation versus ambient temperature

Valid provided that electrodes are kept at ambient temperature

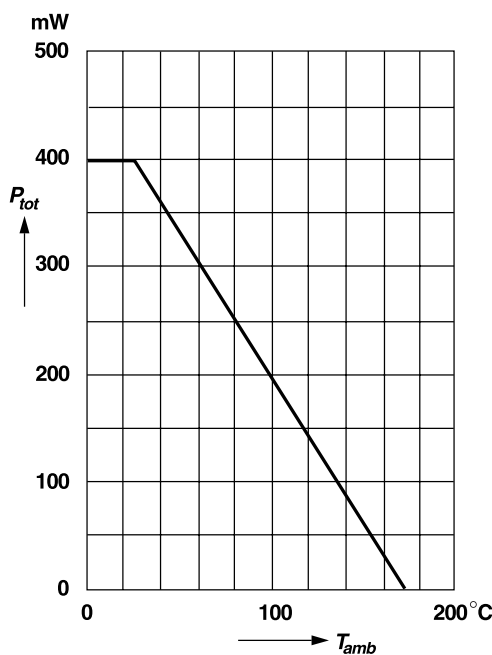


Leakage current versus junction temperature

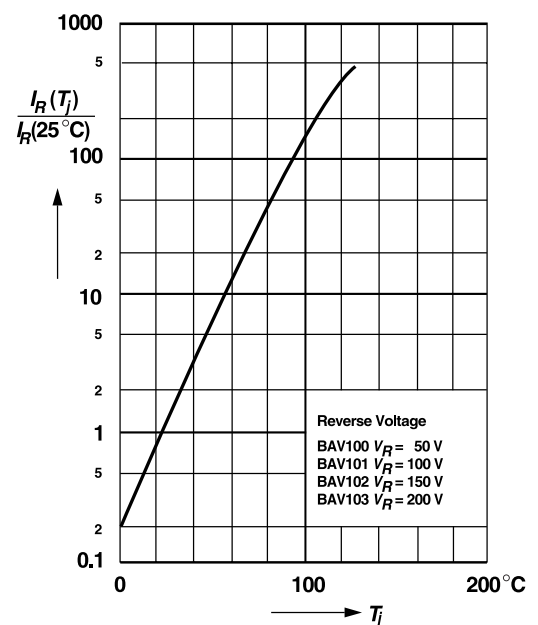

BAV19W thru BAV21W



Dynamic forward resistance
versus forward current

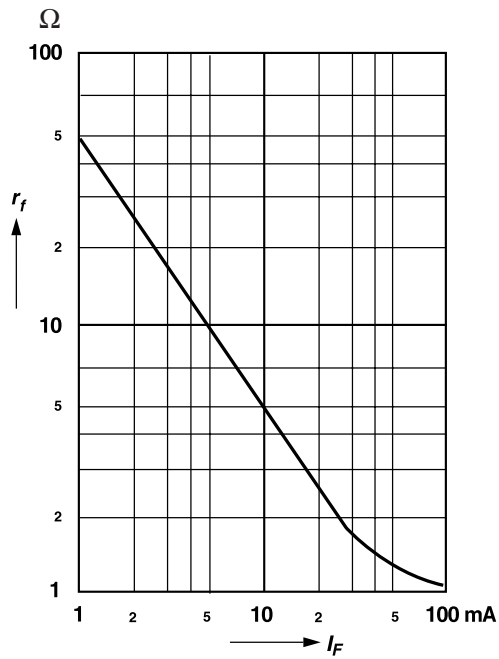

Capacitance
versus reverse voltage

