




BAV70...



Silicon Switching Diode

- For high-speed switching applications
- Common cathode configuration

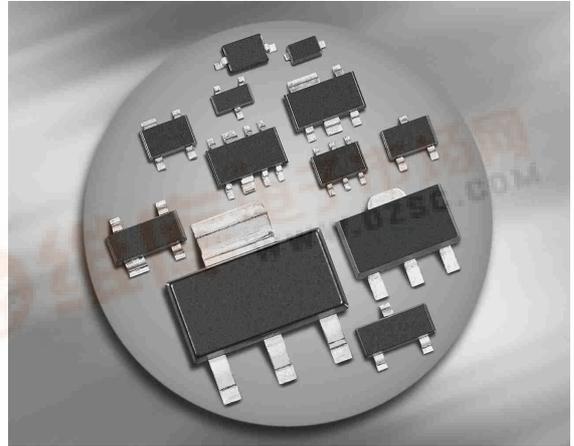

BAV70
BAV70F
BAV70L3
BAV70T
BAV70W

BAV70S
BAV70U



| Type | Package | Configuration | Marking |
|------------|----------|--------------------------|---------|
| BAV70 | SOT23 | common cathode | A4s |
| BAV70F* | TSFP-3 | common cathode | A4s |
| BAV70L3 ** | TSLP-3-1 | common cathode, leadless | A4 |
| BAV70S | SOT363 | double common cathode | A4s |
| BAV70T | SC75 | common cathode | A4s |
| BAV70U | SC74 | double common cathode | A4s |
| BAV70W | SOT323 | common cathode | A4s |

* Preliminary Data

** Target Data

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

| Parameter | Symbol | Value | Unit |
|---|-----------|-------------|------------------|
| Diode reverse voltage | V_R | 80 | V |
| Peak reverse voltage | V_{RM} | 85 | |
| Forward current | I_F | 200 | mA |
| Non-repetitive peak surge forward current | I_{FSM} | | A |
| $t = 1 \mu\text{s}$ | | 4.5 | |
| $t = 1 \text{ ms}$ | | 1 | |
| $t = 1 \text{ s single}$ | | 0.5 | |
| $t = 1 \text{ s double}$ | | 0.75 | |
| Total power dissipation | P_{tot} | | mW |
| BAV70, $T_S \leq 33^\circ\text{C}$ | | 250 | |
| BAV70F, $T_S \leq \text{tbd}$ | | 250 | |
| BAV70L3, $T_S \leq \text{tbd}$ | | 250 | |
| BAV70S, $T_S \leq 85^\circ\text{C}$ | | 250 | |
| BAV70T, $T_S \leq 73^\circ\text{C}$ | | 250 | |
| BAV70U, $T_S \leq 90^\circ\text{C}$ | | 250 | |
| BAV70W, $T_S \leq 103^\circ\text{C}$ | | 250 | |
| Junction temperature | T_j | 150 | $^\circ\text{C}$ |
| Storage temperature | T_{stg} | -65 ... 150 | |

Thermal Resistance

| Parameter | Symbol | Value | Unit |
|--|------------|-------------------|------|
| Junction - soldering point ¹⁾ | R_{thJS} | | K/W |
| BAV70 | | ≤ 460 | |
| BAV70F | | $\leq \text{tbd}$ | |
| BAV70L3 | | $\leq \text{tbd}$ | |
| BAV70S | | ≤ 260 | |
| BAV70T | | ≤ 310 | |
| BAV70U | | ≤ 240 | |
| BAV70W | | ≤ 190 | |


¹For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

| Parameter | Symbol | Values | | | Unit |
|---|------------|--------|------|------------------------------------|---------------|
| | | min. | typ. | max. | |
| DC Characteristics | | | | | |
| Breakdown voltage $I_{(BR)} = 100 \mu\text{A}$ | $V_{(BR)}$ | 85 | - | - | V |
| Reverse current $V_R = 70 \text{ V}$ $V_R = 25 \text{ V}, T_A = 150^\circ\text{C}$ $V_R = 70 \text{ V}, T_A = 150^\circ\text{C}$ | I_R | - | - | 0.15 30 50 | μA |
| Forward voltage $I_F = 1 \text{ mA}$ $I_F = 10 \text{ mA}$ $I_F = 50 \text{ mA}$ $I_F = 100 \text{ mA}$ $I_F = 150 \text{ mA}$ | V_F | - | - | 715 855 1000 1200 1250 | mV |

AC Characteristics

| | | | | | |
|--|----------|---|---|-----|----|
| Diode capacitance $V_R = 0 \text{ V}, f = 1 \text{ MHz}$ | C_T | - | - | 1.5 | pF |
| Reverse recovery time $I_F = 10 \text{ mA}, I_R = 10 \text{ mA}$, measured at $I_R = 1 \text{ mA}$, $R_L = 100 \Omega$ | t_{rr} | - | - | 4 | ns |

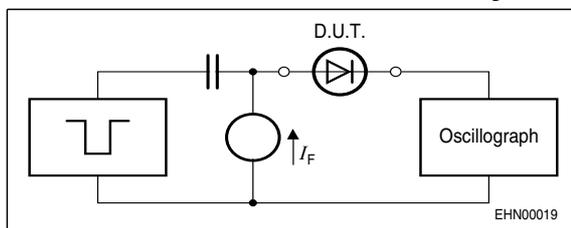
Test circuit for reverse recovery time


Pulse generator: $t_p = 100\text{ns}$, $D = 0.05$, $t_f = 0.6\text{ns}$,
 $R_i = 50\Omega$

Oscilloscope: $R = 50\Omega$, $t_r = 0.35\text{ns}$, $C = 0.05\text{pF}$


Reverse current $I_R = f(T_A)$

$V_R = \text{Parameter}$

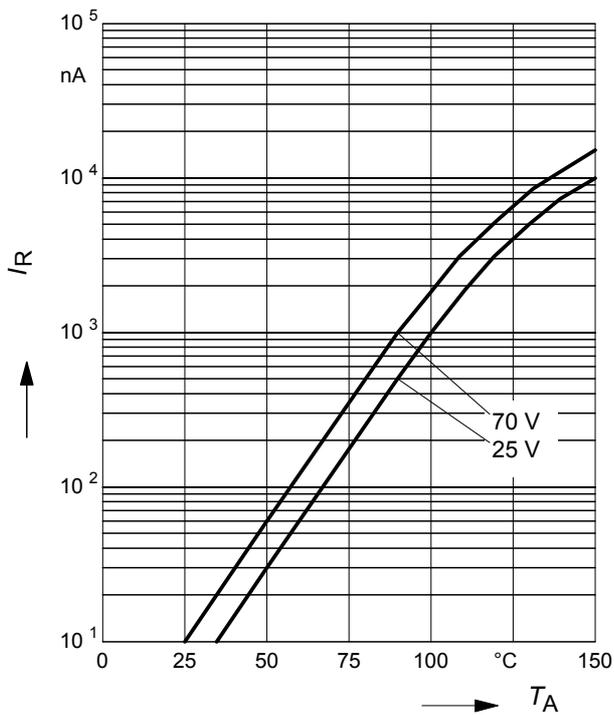


Forward Voltage $V_F = f(T_A)$

$I_F = \text{Parameter}$

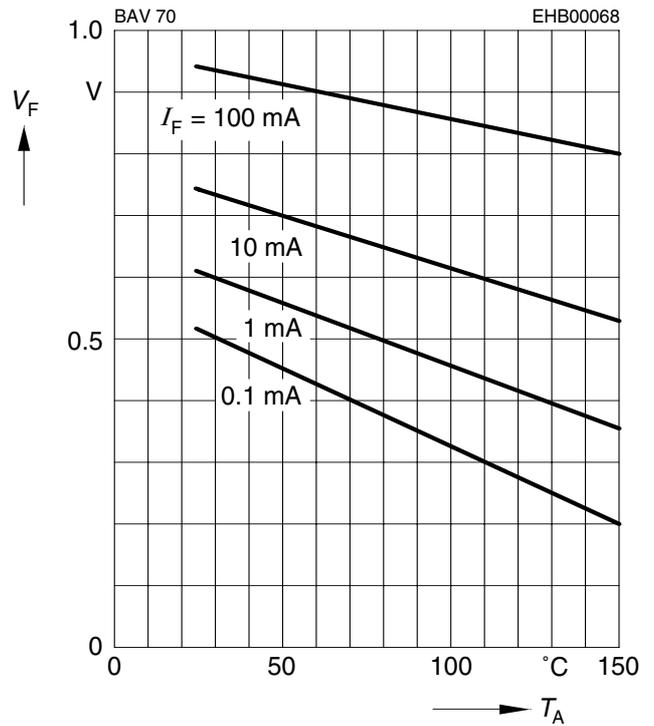


Forward current $I_F = f(V_F)$

$T_A = 25^\circ\text{C}$

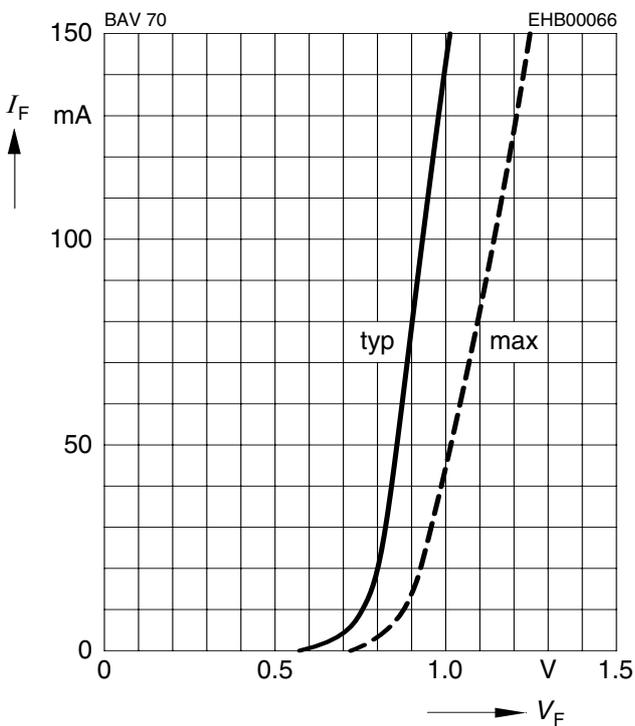


Forward current $I_F = f(T_S)$

BAV70

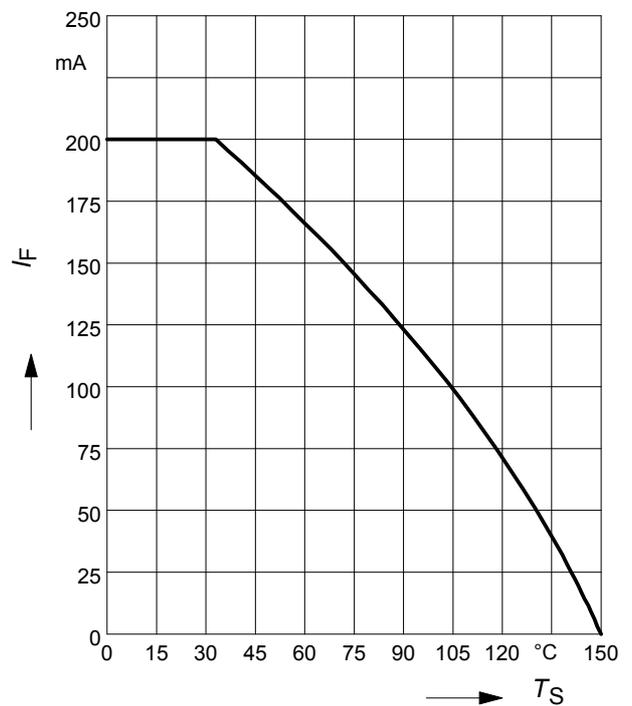


Forward current $I_F = f(T_S)$

BAV70S

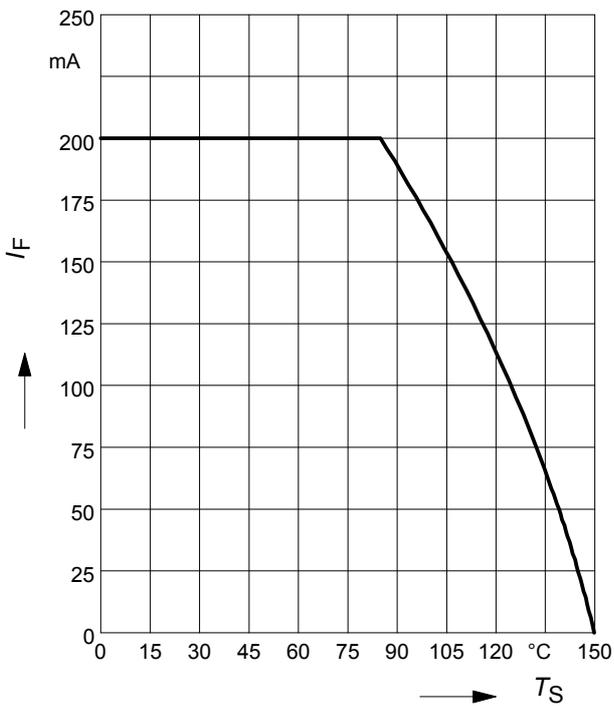


Forward current $I_F = f(T_S)$

BAV70T

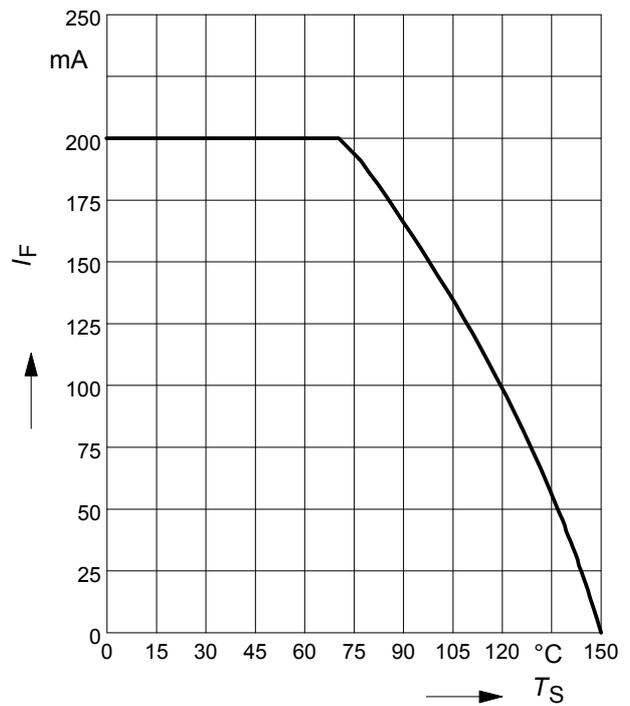


Forward current $I_F = f(T_S)$

BAV70U

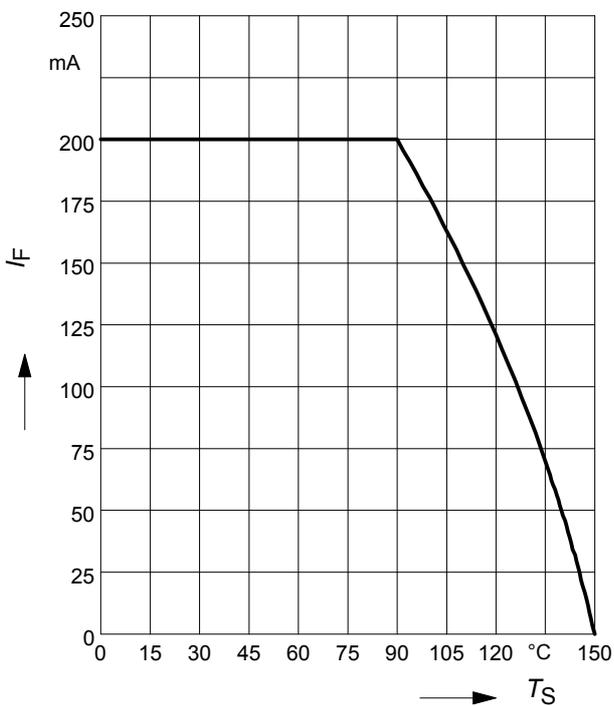


Forward current $I_F = f(T_S)$

BAV70W

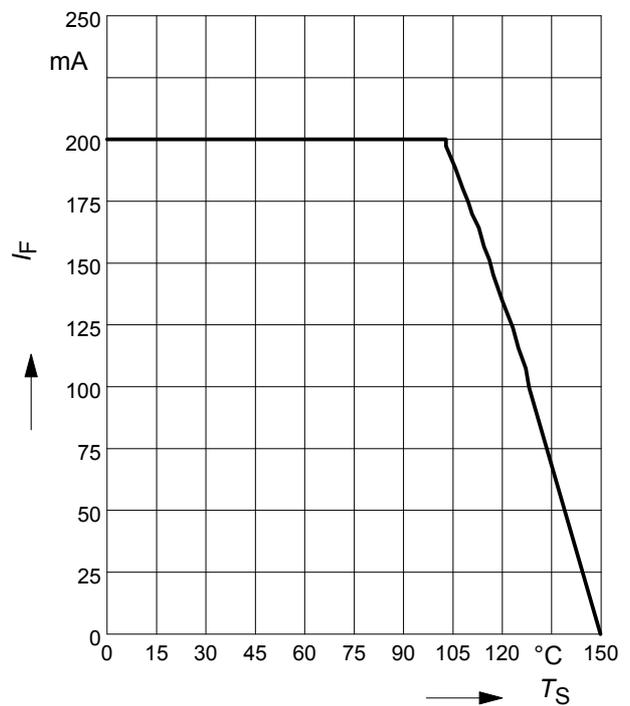

Permissible Puls Load $R_{thJS} = f(t_p)$


BAV70

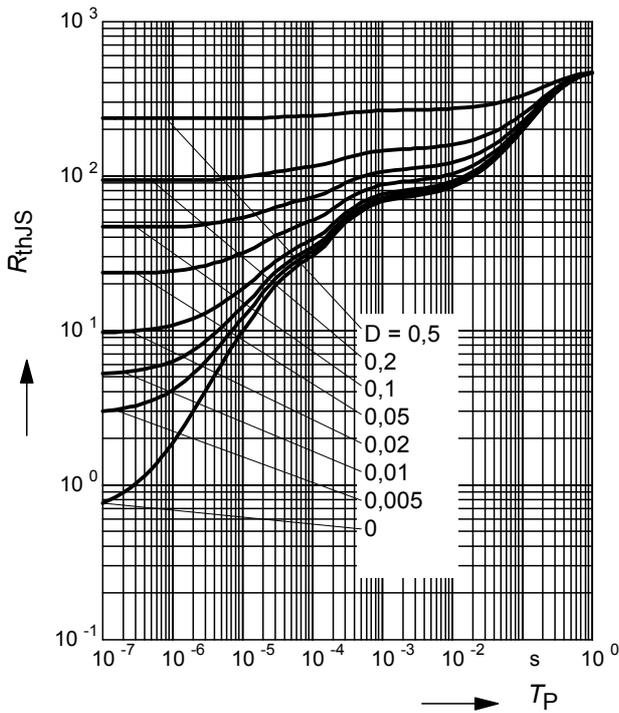

Permissible Pulse Load $I_{Fmax}/I_{FDC} = f(t_p)$


$I_{Fmax}/I_{FDC} = f(t_p)$

BAV70

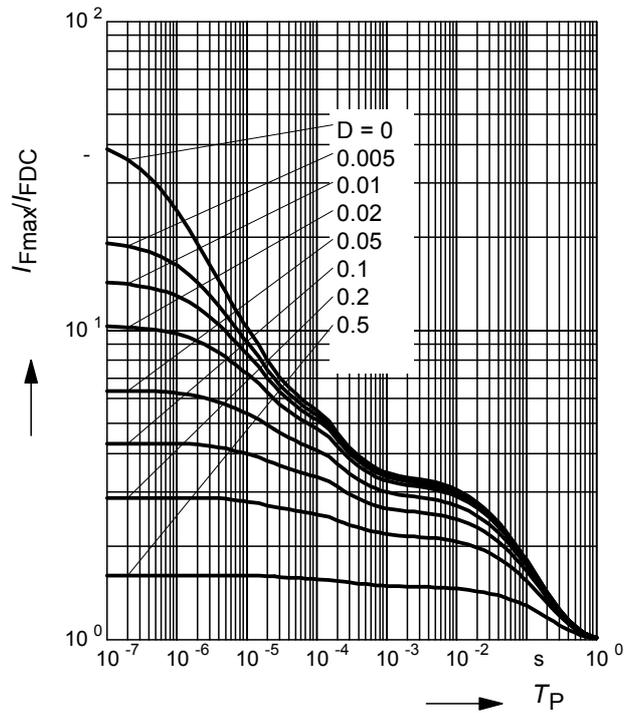

Permissible Puls Load $R_{thJS} = f(t_p)$


BAV70S

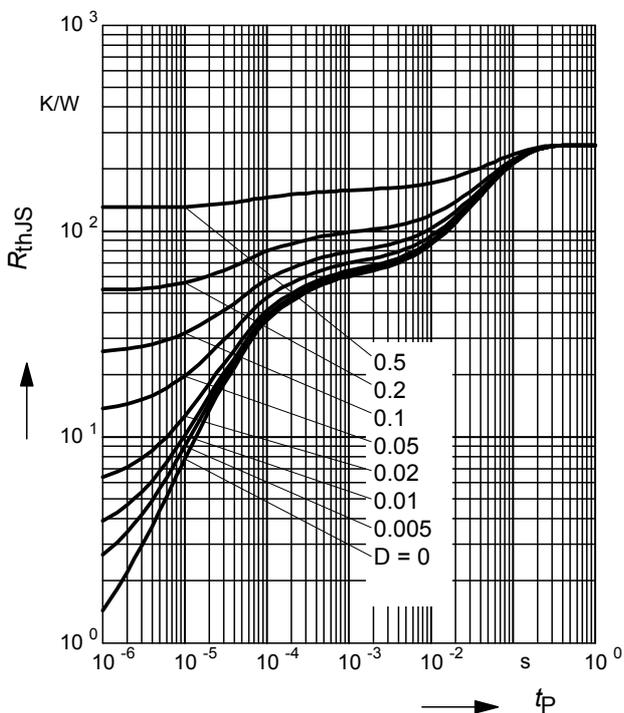

Permissible Pulse Load $I_{Fmax}/I_{FDC} = f(t_p)$


$I_{Fmax}/I_{FDC} = f(t_p)$

BAV70S

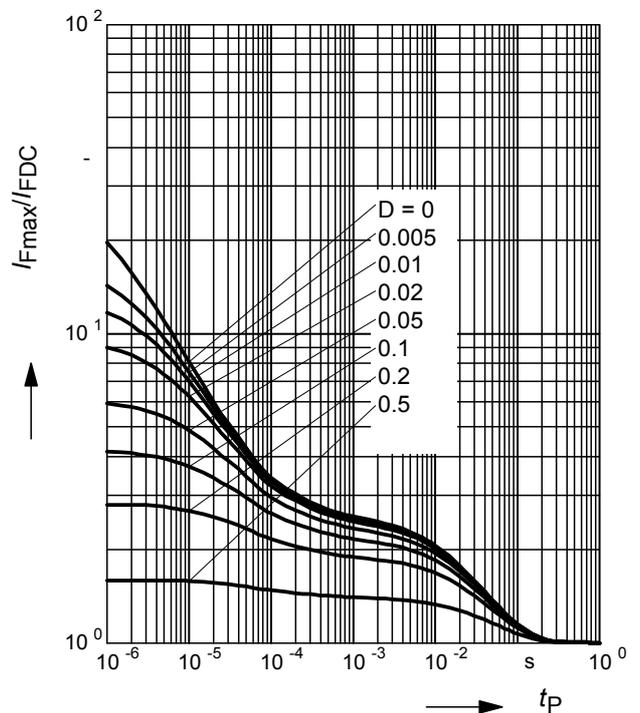


Permissible Puls Load $R_{thJS} = f(t_p)$

BAV70U

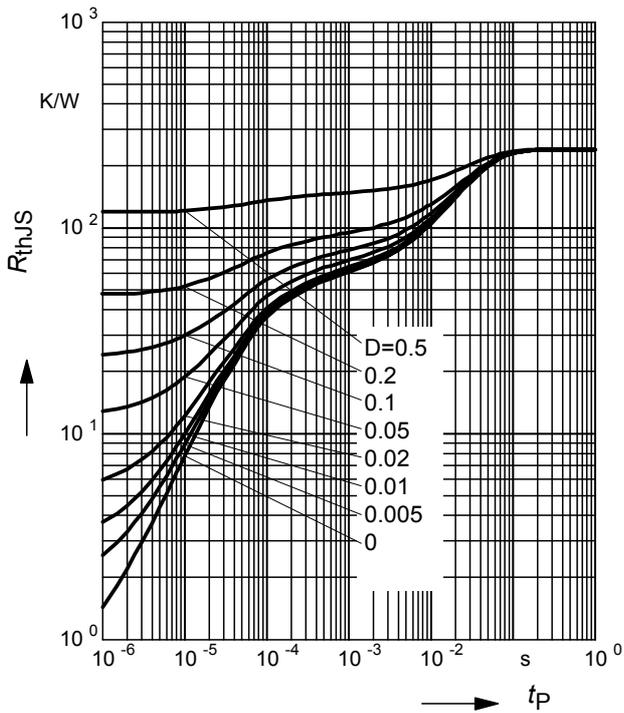


Permissible Pulse Load $I_{Fmax}/I_{FDC} = f(t_p)$

BAV70U

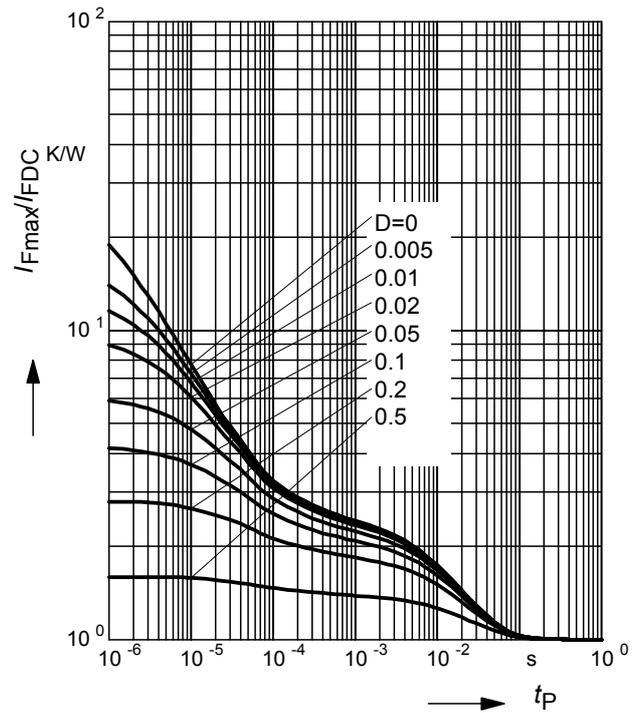

Permissible Puls Load $R_{thJS} = f(t_p)$

BAV70W

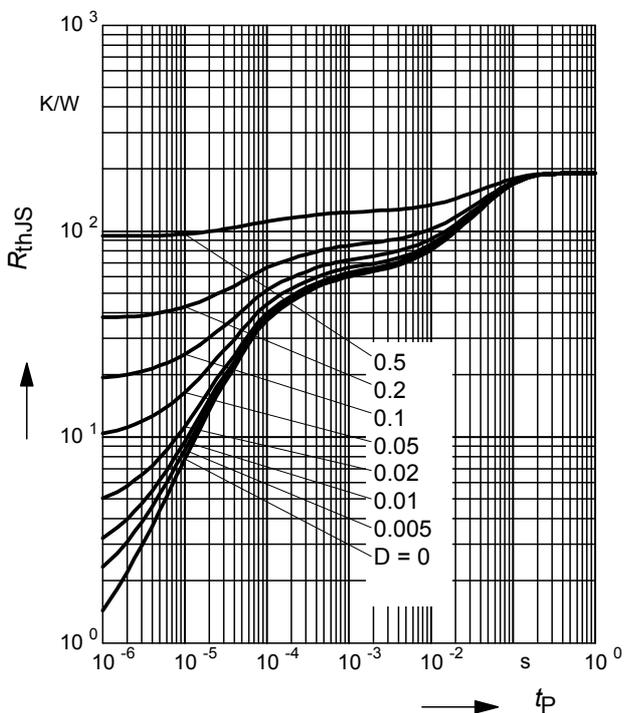

Permissible Pulse Load $I_{Fmax}/I_{FDC} = f(t_p)$

BAV70W

