

Low-voltage variable capacitance diode

FEATURES

- Excellent linearity
- Ultra small plastic SMD package
- C4: 2.25 pF; ratio: 2.35
- Low series resistance.

BB 143




APPLICATIONS

- Voltage controlled oscillators (VCO).

DESCRIPTION

The BB143 is a variable capacitance diode, fabricated in planar technology, and encapsulated in the SOD523 (SC-79) ultra small plastic SMD package.



LIMITING VALUES In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_R	continuous reverse voltage		—	6	V
V_{RM}	peak reverse voltage	in series with a 10 kΩ resistor	—	8	V
I_F	continuous forward current		—	20	mA
T_{stg}	storage temperature		-55	+150	°C
T_j	operating junction temperature		-55	+150	°C

ELECTRICAL CHARACTERISTICS $T_j=25^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_R	reverse current	$V_R=6\text{ V}$; see Fig.2	—	—	10	nA
		$V_R=6\text{ V}$; $T_j=85^\circ\text{C}$; see Fig.2	—	—	200	nA
r_s	diode series resistance	$f=470\text{ MHz}$; $V_R=1\text{ V}$	—	0.5	—	Ω
C_d	diode capacitance	$V_R=1\text{ V}$; $f=1\text{ MHz}$; see Figs 1 and 3	4.75	5.3	5.75	pF
		$V_R=4\text{ V}$; $f=1\text{ MHz}$; see Figs 1 and 3	2.05	2.25	2.55	pF
$\frac{C_d(1V)}{C_d(4V)}$	capacitance ratio	$f=1\text{ MHz}$	2.1	2.35	—	

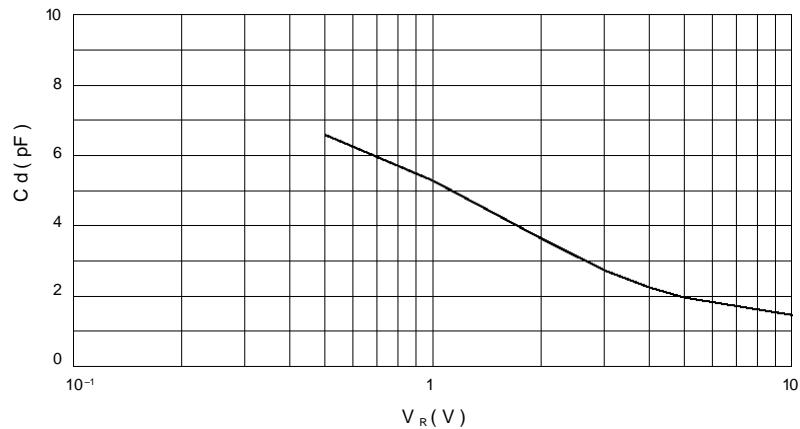
BB 143


Fig.1 Diode capacitance as a function of reverse voltage; typical values.

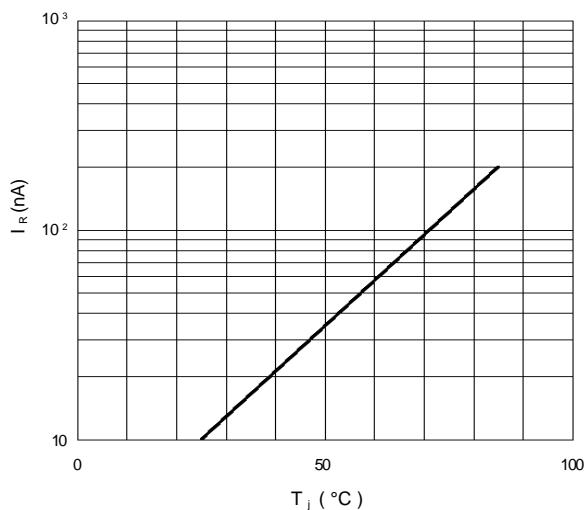


Fig.2 Reverse current as a function of junction temperature; maximum values.

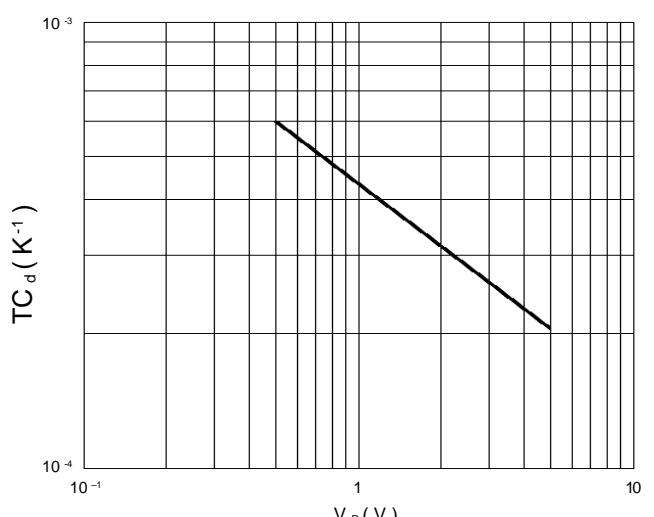


Fig.3 Temperature coefficient of diode capacitance as a function of reverse voltage; typical values.