
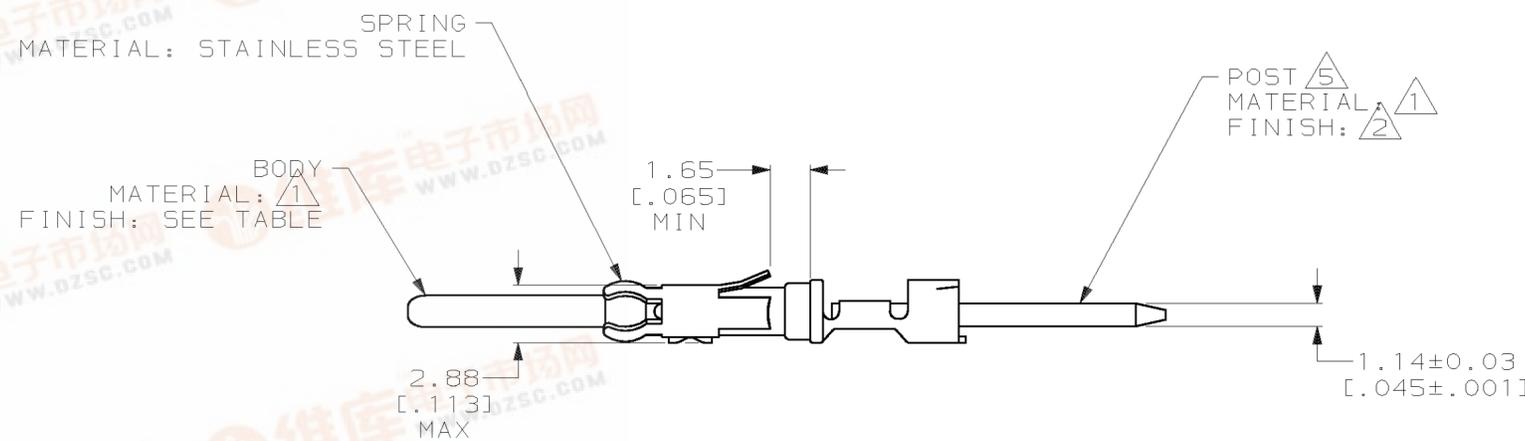


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 (C) COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
		T		REVISE PER ECN 063B-0620-00	06DEC00	SU	G5

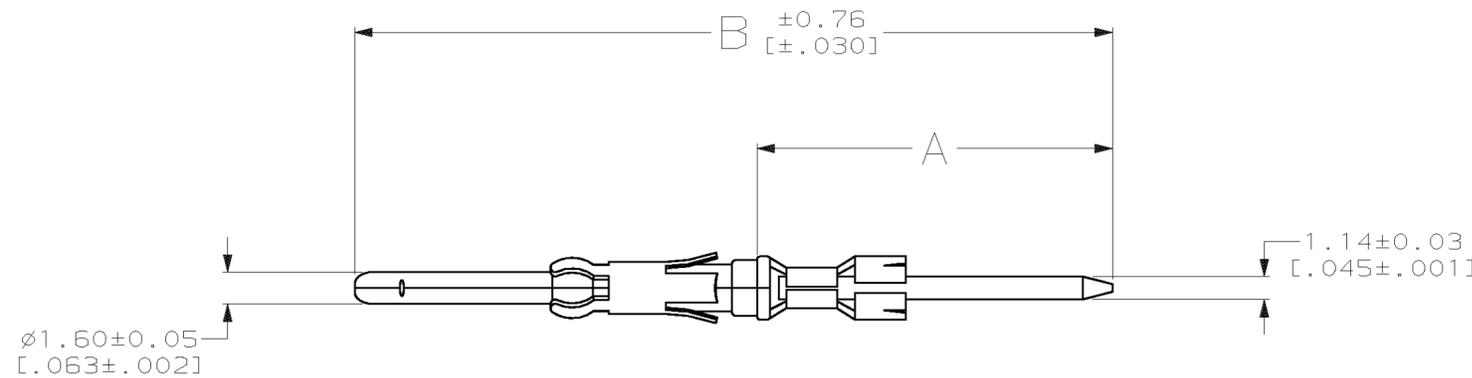

- 1 BRASS PER ASTM B-36.
- 2 2.54 μ m [.000100] MIN TIN-LEAD OVER 1.27 μ m [.000050] MIN NICKEL.
- 3 SELECTIVELY PLATED 0.76 μ m [.000030] MIN GOLD, FOR A DISTANCE OF 5.08 [.200] FROM MATING END, GOLD FLASH ON REMAINDER, ALL OVER 1.27 μ m [.000050] MIN NICKEL.
- 4. GOLD PLATING NOT TO APPEAR ON INSULATION SUPPORT STABILIZER.
- 5 POST WILL ACCEPT (SEE TABLE) TERMINATIONS.

3	SPECIAL	35.03 [1.379]	14.86 [.585]	1-66471-4
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
2	SPECIAL	40.79 [1.606]	20.65 [.813]	1-66471-0
3	3	49.89 [1.964]	29.74 [1.171]	66471-9
3	1	37.97 [1.495]	17.81 [.701]	66471-7
2	3	49.89 [1.964]	29.74 [1.171]	66471-3
2	1	37.97 [1.495]	17.81 [.701]	66471-1
BODY FINISH	NO OF TERM	B	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: C. REIFSNYDER 07 JUN 96	AMP Incorporated
CHK: R. STONE 12 JUL 96	Harrisburg, PA 17105-3608
APVD: G.A. STEINHAUER 23 JUL 96	NAME: PIN CONTACT, CRIMPED, $\phi .062$, $.045 \times .045$ POST, M SERIES
PRODUCT SPEC: -	SIZE: A2
APPLICATION SPEC: -	CAGE CODE: 00779
WEIGHT: -	DRAWING NO: C-66471
MATERIAL: -	SCALE: 4:1
SEE CALLOUTS	SHEET: 1 OF 1
SEE CALLOUTS	REV: T

CUSTOMER DRAWING

