


**Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272**  
**Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14**

## **Phase Control SCR**

**2300 Amperes Average  
2500 Volts**

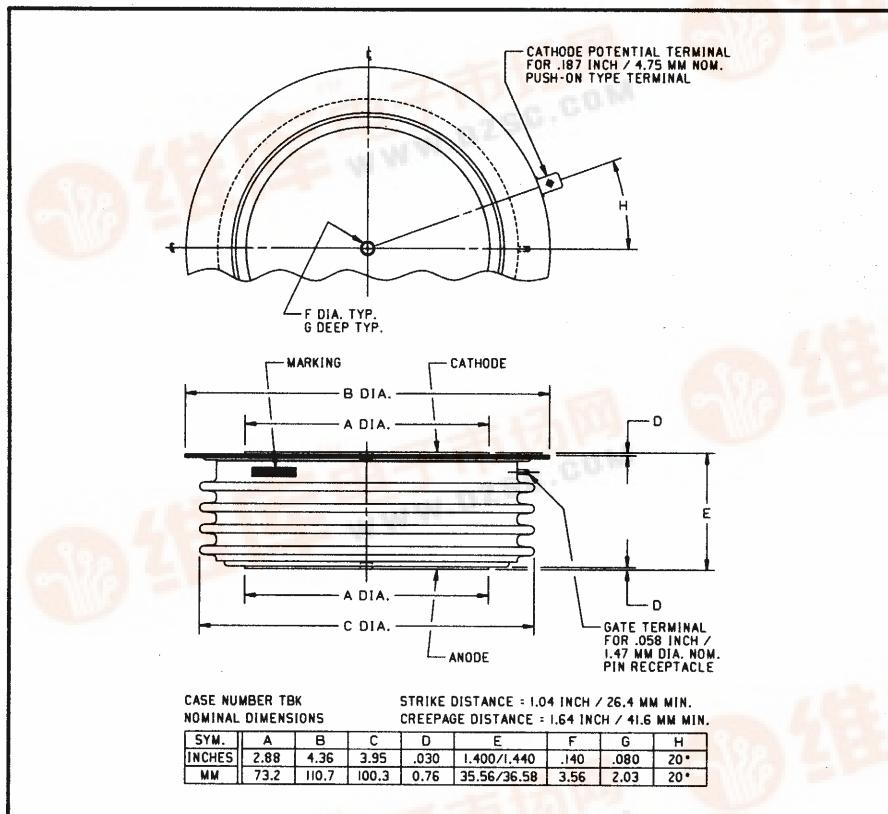

**C782 (Outline Drawing)**



**C782 Phase Control SCR**  
**2300 Amperes Average, 2500 Volts**

### **Ordering Information:**

Select the complete six digit part number you desire from the table, i.e. C782LE is a 2500 Volt, 2300 Ampere Phase Control SCR.

Type	Voltage		Current
	V <sub>DRM</sub>	V <sub>RRM</sub>	
C782	2200	LB	2300
	2300	LC	
	2400	LD	
	2500	LE	

### **Description:**

Powerex Silicon Controlled Rectifiers (SCR) are designed for phase control applications. These are all-diffused, Press-Pak, hermetic Pow-R-Disc devices employing the field proven amplifying gate.

### **Features:**

- Low On-State Voltage
- High di/dt Capability
- High dv/dt Capability
- Hermetic Packaging
- Excellent Surge and I<sup>2</sup>t Ratings

### **Applications:**

- Power Supplies
- Motor Control



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272  
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

**C782**  
**Phase Control SCR**  
2300 Amperes Average, 2500 Volts

### Absolute Maximum Ratings

Characteristics	Symbol	C782	Units
Non-repetitive Transient Peak Reverse Voltage	$V_{RSM}$	$V_{RRM} + 100V$	Volts
RMS On-state Current, $T_C = 70^\circ C$	$I_T(rms)$	3610	Amperes
Average Current 180° Sine Wave, $T_C = 70^\circ C$	$I_T(av)$	2300	Amperes
RMS On-state Current, $T_C = 55^\circ C$	$I_T(rms)$	4240	Amperes
Average Current 180° Sine Wave, $T_C = 55^\circ C$	$I_T(av)$	2700	Amperes
Peak One Cycle Surge On-state Current (Non-repetitive) 60Hz	$I_{tsm}$	35000	Amperes
Peak One Cycle Surge On-state Current (Non-repetitive) 50Hz	$I_{tsm}$	32000	Amperes
Critical Rate-of-rise of On-state Current (Non-repetitive)	$di/dt$	600	A/ $\mu$ sec
Critical Rate-of-rise of On-state Current (Repetitive)	$di/dt$	100	A/ $\mu$ sec
$I^2t$ (for Fusing) for One Cycle, 60Hz	$I^2t$	$5 \times 10^6$	A <sup>2</sup> sec
Peak Gate Power Dissipation	$P_{GM}$	250	Watts
Average Gate Power Dissipation	$P_{G(av)}$	35	Watts
Operating Temperature	$T_j$	-40 to +125°C	°C
Storage Temperature	$T_{stg}$	-40 to +150°C	°C
Approximate Weight		3.5	lb.
		1.60	kg
Mounting Force		9000 to 10000	lb.
		40 to 44.5	kN



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272  
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

C782

Phase Control SCR

2300 Amperes Average, 2500 Volts

### Electrical Characteristics, $T_j = 25^\circ\text{C}$ Unless Otherwise Specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Repetitive Peak Reverse Leakage Current	$I_{RRM}$	$T_j = 125^\circ\text{C}, V_R = V_{RRM}$		150		mA
Repetitive Peak Forward Leakage Current	$I_{DRM}$	$T_j = 125^\circ\text{C}, V_D = V_{DRM}$		150		mA
Peak On-state Voltage	$V_{TM}$	$T_j = 125^\circ\text{C}, I_T = 2000\text{A Peak}$ Duty Cycle < 0.1%		1.35		Volts
Threshold Voltage, Low-level	$V_{(TO)1}$	$T_j = 125^\circ\text{C}, I = 15\%, I_T(\text{av}) \text{ to } \pi I_T(\text{av})$		0.86799		Volts
Slope Resistance, Low-level	$r_{T1}$			0.1703		$\text{m}\Omega$
Threshold Voltage, High-level	$V_{(TO)2}$	$T_j = 125^\circ\text{C}, I = \pi I_T(\text{av}) \text{ to } I_{TSM}$		1.0951		Volts
Slope Resistance, High-level	$r_{T2}$			0.1226		$\text{m}\Omega$
$V_{TM}$ Coefficients, Low-level		$T_j = 125^\circ\text{C}, I = 15\% I_T(\text{av}) \text{ to } \pi I_T(\text{av})$		$A_1 = 0.60452$ $B_1 = 0.003408$ $C_1 = 3.235E-05$ $D_1 = 0.01293$		
$V_{TM}$ Coefficients, High-level		$T_j = 125^\circ\text{C}, I = \pi I_T(\text{av}) \text{ to } I_{TSM}$		$A_2 = 2.2748$ $B_2 = -0.17012$ $C_2 = 1.155E-04$ $D_2 = 0.004534$		
Typical Delay Time	$t_d$	$T_j = 125^\circ\text{C}, V_D = 1800\text{V}$	3			$\mu\text{sec}$
Typical Turn-off Time	$t_q$	$T_j = 125^\circ\text{C}, I_T = 2000\text{A},$ $t_p > 2\text{msec}, dI_R/dt = 5\text{A}/\mu\text{sec}$ $V \text{ Reapplied} = 1500\text{V},$ $dv/dt = 1000\text{V}/\mu\text{sec}, V_R = 100\text{V}$	250			$\mu\text{sec}$
Minimum Critical $dv/dt$ - Exponential to $V_{DRM}$	$dv/dt$	$T_j = 125^\circ\text{C}, V_D = 0.8 V_{DRM}$	500			$\text{V}/\mu\text{sec}$
Gate Trigger Current	$I_{GT}$	$T_j = 25^\circ\text{C}, V_D = 12V_{DC}$		250		mA
Gate Trigger Voltage	$V_{GT}$	$T_j = 25^\circ\text{C}, V_D = 12V_{DC}$		4.5		Volts
Non-Triggering Gate Voltage	$V_{GDM}$	$T_j = 125^\circ\text{C}, V_D = 1300\text{V}$		0.5		Volts
Peak Forward Gate Current	$I_{GTM}$			20		A
Peak Reverse Gate Voltage	$V_{GRM}$			20		Volts

### Thermal Characteristics

Maximum Thermal Resistance, Double Sided Cooling

Junction-to-Case	$R_{\theta(j-c)}$	0.012	$^\circ\text{C}/\text{W}$
Case-to-Sink	$R_{\theta(c-s)}$	0.002	$^\circ\text{C}/\text{W}$

# POWEREX


Powerex, Inc., 200 Hills Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272  
 Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

C782


Phase Control SCR

2300 Amperes Average, 2500 Volts


**Maximum On-State Forward Voltage Drop**  
 $(T_J = 125^\circ C)$

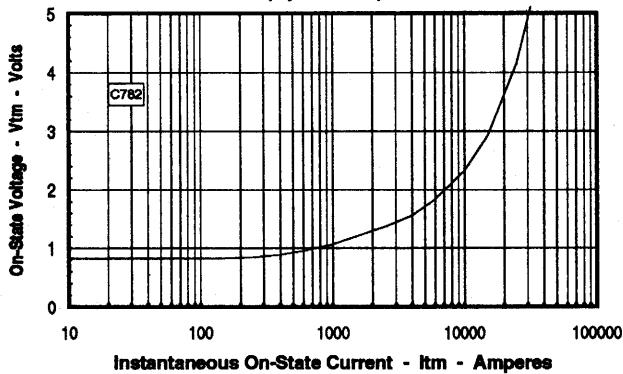


**Maximum Transient Thermal Impedance**  
 $(\text{Junction to Case})$

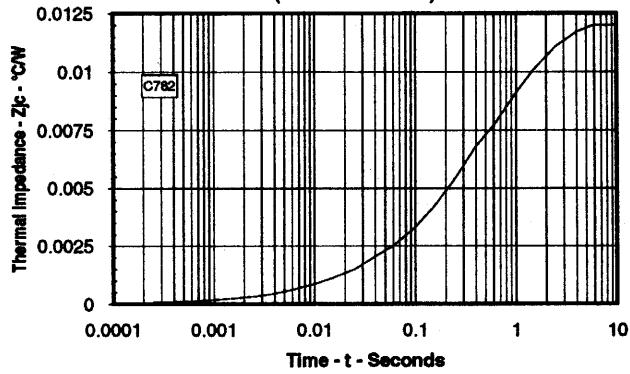


**Maximum On-State Power Dissipation**  
 $(\text{Sinusoidal Waveform})$

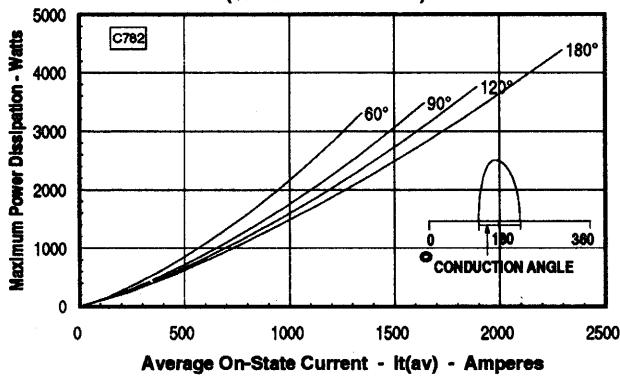


**Maximum Allowable Case Temperature**  
 $(\text{Sinusoidal Waveform})$

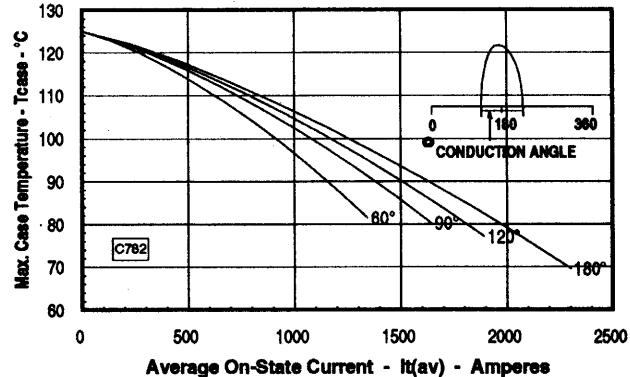

**Maximum On-State Power Dissipation**  
 $(\text{Rectangular Waveform})$

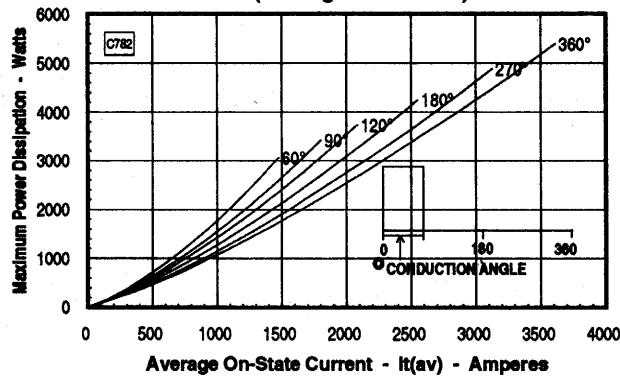

**Maximum Allowable Case Temperature**  
 $(\text{Rectangular Waveform})$

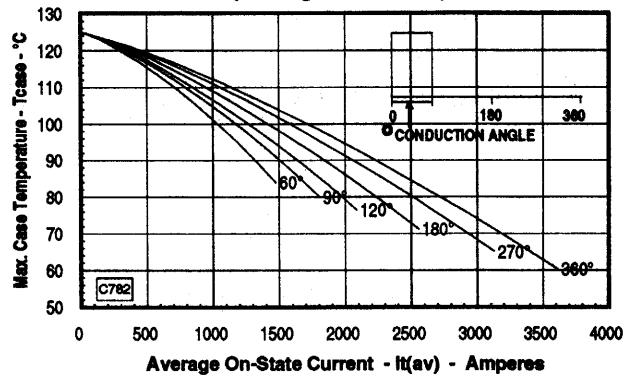

Note: Spreading losses included. Curves are for an inductive load.