

查询CD3A20供应商


捷多邦 专业PCB打样工厂, 24小时加急出货

- 1N5822 AVAILABLE IN JANHC AND JANKC PER MIL-PRF-19500/620
- 3 AMP SCHOTTKY BARRIER RECTIFIER CHIPS
- SILICON DIOXIDE PASSIVATED
- COMPATIBLE WITH ALL WIRE BONDING AND DIE ATTACH TECHNIQUES, WITH THE EXCEPTION OF SOLDER REFLOW

CD5820  
thru  
CD5822  
and  
CD3A20  
thru  
CD3A40

### MAXIMUM RATINGS

Operating Temperature: -65°C to +125°C  
 Storage Temperature: -65°C to +150°C  
 Average Rectified Forward Current: 3.0 AMP @ +55°C  
 Derating: 43 mA / °C above +55°C

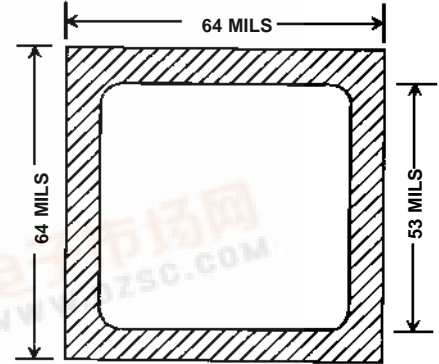

BACKSIDE IS CATHODE  
FIGURE 1

CDI TYPE NUMBER	WORKING PEAK REVERSE VOLTAGE	MAXIMUM FORWARD VOLTAGE		MAXIMUM REVERSE LEAKAGE CURRENT AT RATED VOLTAGE	
		$V_{F@1.0A}$	$V_{F@3.0A}$	$I_{R@25^{\circ}C}$	$I_{R@100^{\circ}C}$
	VOLTS	VOLTS	VOLTS	mA	mA
CD5820	20	0.45	0.55	0.10	12.5
CD5821	30	0.45	0.55	0.10	12.5
CD5822	40	0.45	0.55	0.10	12.5
JHC, JKC 5822	40	0.40	0.50	0.10	12.5
CD3A20	20	0.45	0.55	0.10	12.5
CD3A30	30	0.45	0.55	0.10	12.5
CD3A40	40	0.45	0.55	0.10	12.5

### DESIGN DATA

**METALLIZATION:**  
 Top: (Anode).....Al  
 Back: (Cathode) .....Au

**AL THICKNESS**.....25,000 Å Min

**GOLD THICKNESS**.....4,000 Å Min

**CHIP THICKNESS**.....10 Mils

**TOLERANCES:** ALL  
 Dimensions ± 2 mils



**COMPENSATED DEVICES INCORPORATED**

22 COREY STREET, MELROSE, MASSACHUSETTS 02176  
 PHONE (781) 325-1074 FAX (781) 325-7070

# CD5820 thru CD5822 and CD3A20 thru CD3A40

TYPICAL REVERSE LEAKAGE CURRENT AT RATED PIV (PULSED)

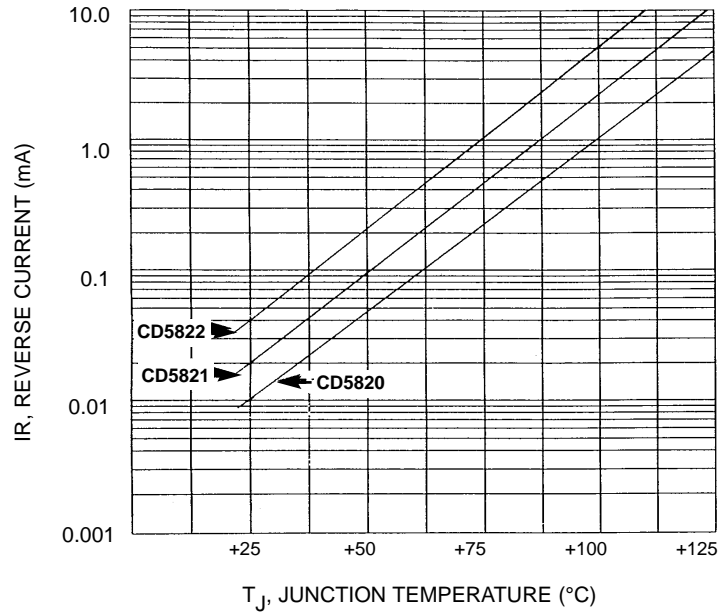


FIGURE 1

TYPICAL FORWARD VOLTAGE

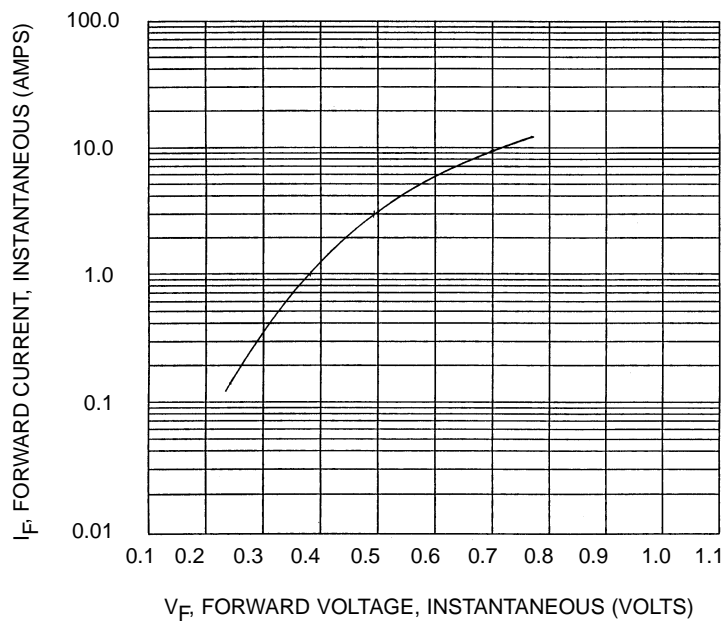


FIGURE 2