



查询CM10供应商

CLARE

捷多邦, 专业PCB打样工厂, 24小时加急出货

# Molded Mini-DYAD™ CM10



## Features

- Small size
- SMT-compatible
- Easily formed leads
- Sputtered ruthenium contacts
- Hermetically sealed contacts
- Fast switching speed — up to 500Hz
- Wide range of available magnetic sensitivities
- Superior mechanical strength
- Enhanced for better auto placement

## Applications


- Security
  - Proximity sensing
  - Smoke alarms
- Automotive
  - Level sensor
  - Lamp current sensor
- Relays

## Description

Clare's Molded Mini DYAD dry reed switches are ideally suited for small switching signal applications. This switch has sputtered ruthenium contacts and an extraordinary seal strength, achieved by a patented laser sealing of the glass. In a low level or dry switching environments, both switches typically provide >1 billion operations. The switches have hermetically sealed contacts and offer a wide range of available magnetic sensitivities. In addition, the molding process provides a solid plastic outer shell. This plastic shell provides superior mechanical strength, eliminates concerns over handling glass switches, and provides an ideal solution for high speed, automated assembly environments.

## Ordering Information

A complete part number is represented by the digits to the right. For example, CM10S2030 is a MOLDED MINI-DYAD™ with a minimum operate value of 10NI and a maximum of 30NI. Refer to the switch operating specification charts for available ranges. Special ranges are available upon request.

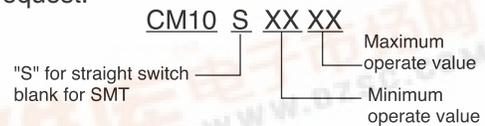

Surface Mount Molded Mini-DYAD  
Refer to operating characteristics table for complete part number.

## Standard Test Coil

The magnetic force (expressed in NI, AT or Ampere Turns) required to cause the reed switch contacts to close is called the pull-in or operate value.

	CM10
Part #	Coil - 1
Coil definition	NARM1 CTC01
Coil resistance	1200Ω
Number of turns	5,000
Wire size (nom. diameter)	0.0399mm (AWG 46)
Bobbin diameter (inside coil)	3.96mm
Winding length	10.4mm

<sup>(1)</sup> Consult factory for test procedure.  
The reed switch shall be placed in the test coil with the gap centered in the core of the coil winding.  
Test leads and their clips must be non-magnetic.  
The longitudinal axis of the test coil and the test switch shall be vertical.

## Molded Mini-DYAD™

Part #	Operate Range (NI) <sup>1</sup>
CM10S1015	10 to 15
CM10S1020	10 to 20
CM10S1030	10 to 30
CM10S1520	15 to 20
CM10S1525	15 to 25
CM10S2025	20 to 25

## Molded Mini-DYAD™ Surface Mount

Part #	Operate Range (NI) <sup>1,2,3</sup>
CM10-2308	10 to 15
CM10-2288	10 to 20
CM10-2339	10 to 30
CM10-2285	15 to 20
CM10-2289	15 to 25
CM10-2286	20 to 25

<sup>1</sup> Tolerance = ± 1.5NI

<sup>2</sup> Full Blade Sensitivity

<sup>3</sup> Surface Mount Switches are packaged 3,000 parts per reel



# Molded Mini-DYAD™



CLARE

## CM10

### Absolute Maximum Ratings (@ 25° C)

Parameter	Min	Typ	Max	Units
Switching Voltage CM10 - Molded Mini-DYAD™	-	-	200	Volts
Switching Current CM10 - Molded Mini-DYAD™	-	-	0.5	Amps
Carry Current CM10 - Molded Mini-DYAD™	-	-	2	Amps
Switching Frequency CM10 - Molded Mini-DYAD™	-	-	500	Hz
Contact Resistance CM10 - Molded Mini-DYAD™	-	-0	100	mΩ

(See detailed specifications for more information.)

*Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this data sheet is not implied. Exposure of the device to the absolute maximum ratings for extended period may degrade the device and effect its reliability.*

### Specifications

All parameters are at 25°C unless otherwise stated.

PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNITS
<b>Contact Ratings</b>						
Operate ampere turns range	Full Blade Tolerance = ± 1.5NI	AT	10	-	30	NI
Release ampere turns range	Full Blade Tolerance = ± 1.5NI	AT	5	-	30	NI
Switching Voltage	Max DC/PeakAC Resistive	$V_L$	-	-	200	VDC
Switching Current	Max DC/PeakAC Resistive	$I_L$	-	-	500	mAmps
Carry Current	Max DC/PeakAC Resistive	$I_C$	-	-	2.0	Amps
Contact Rating	Max DC/PeakAC Resistive	-	-	-	10	VA
Life Expectancy	1V, 10mA Signal Level	-	-	1000	-	$\times 10^6$ Ops
	10V, 10mA Low Level	-	-	500	-	$\times 10^6$ Ops
	50V, 100mA Telecom Load	-	-	2	-	$\times 10^6$ Ops
	100V, 100mA Rated Loads	-	-	2	-	$\times 10^6$ Ops
Static Contact Resistance	50mV, 10mA <sup>(1)</sup>	CR	-	70	100	Ω
Contact Material		-	-	Ru	-	-
<b>Switch Specifications</b>						
Insulation Resistance <sup>(2)</sup>	100V, 25°C, 40% RH	IR	$10^9$	$10^{11}$	-	Ω
Capacitance	Across Open Contacts	-	-	0.3	-	pF
Dielectric Strength <sup>(5)</sup>	Between Contacts	-	250	300	-	VDC/Peak AC
Operate Time, including bounce	At nominal coil voltage, 10Hz Square Wave	$T_{OP}$	-	-	0.5	ms
Release Time	Zener-Diode Suppression <sup>(3)</sup>	$T_{REL}$	-	-	0.1	ms
<b>Environmental Ratings</b>						
Storage Temperature		$T_A$	-40	-	+125	°C
Operating Temperature		$T_0$	-40	-	+125	°C
Soldering Temperature		-	-	-	+265	°C

<sup>(1)</sup> Contact resistance measured with 4 terminal method, 1.1" between test leads


<sup>(2)</sup>  $>10^{12}$  Ω is available upon request

<sup>(3)</sup> A 24V zener in series with a diode across the coil

<sup>(4)</sup> Use caution not to exceed vibration resistance limits while ultrasonically cleaning. Contact Clare, Inc. Engineering for more details/ recommendations

<sup>(5)</sup> 15 ampere turn minimum

Mechanical Dimensions

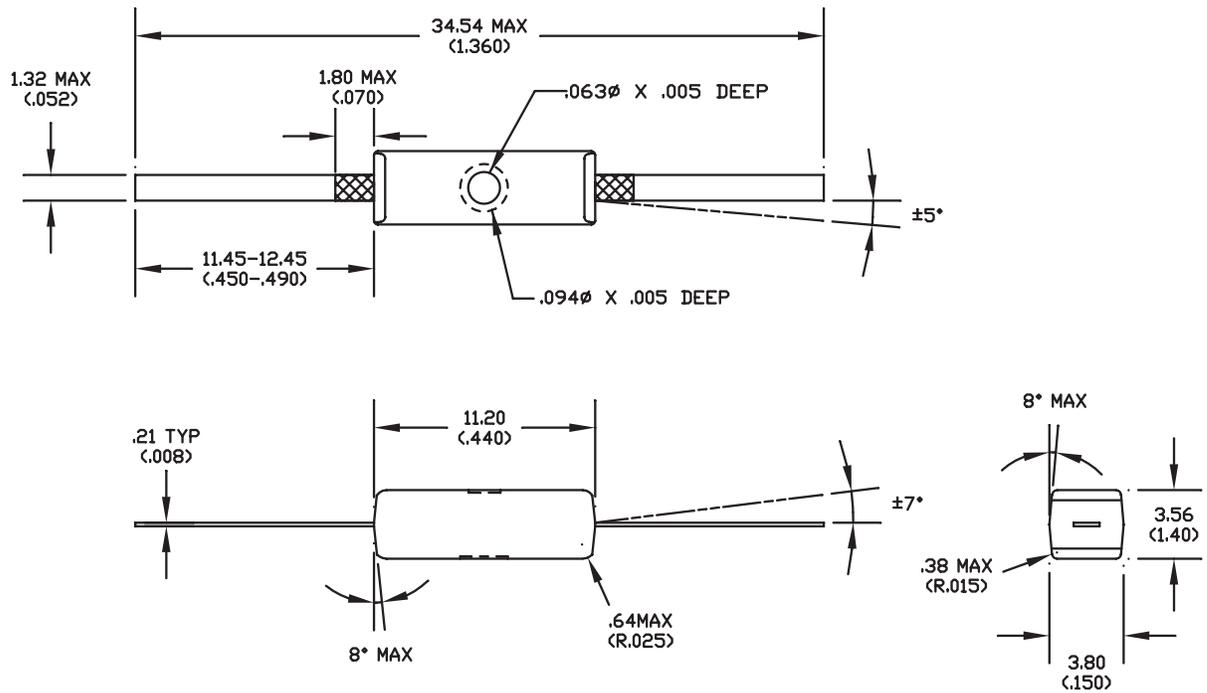

NOTES:

1. SURFACE - MATTE FINISH VDI 18-21
2.  AREA NOT SUITABLE FOR SOLDERING



# CLARE

## Worldwide Sales Offices

### CLARE LOCATIONS

Clare Headquarters  
78 Cherry Hill Drive  
Beverly, MA 01915  
Tel: 1-978-524-6700  
Fax: 1-978-524-4900  
Toll Free: 1-800-27-CLARE

Clare Switch Division  
4315 Earth City Expressway  
St. Louis, MO 63045  
Tel: 1-314-770-1832  
Fax: 1-314-770-1812

Clare Micronix Division  
145 Columbia  
Aliso Viejo, CA 92656-1490  
Tel: 1-949-831-4622  
Fax: 1-949-831-4628

### SALES OFFICES

#### AMERICAS

##### Americas Headquarters

Clare  
78 Cherry Hill Drive  
Beverly, MA 01915  
Tel: 1-978-524-6700  
Fax: 1-978-524-4900  
Toll Free: 1-800-27-CLARE

##### Eastern Region

Clare  
P.O. Box 856  
Mahwah, NJ 07430  
Tel: 1-201-236-0101  
Fax: 1-201-236-8685  
Toll Free: 1-800-27-CLARE

##### Central Region

Clare Canada Ltd.  
3425 Harvester Road, Suite 202  
Burlington, Ontario L7N 3N1  
Tel: 1-905-333-9066  
Fax: 1-905-333-1824

##### Western Region

Clare  
1852 West 11th Street, #348  
Tracy, CA 95376  
Tel: 1-209-832-4367  
Fax: 1-209-832-4732  
Toll Free: 1-800-27-CLARE

##### Canada

Clare Canada Ltd.  
3425 Harvester Road, Suite 202  
Burlington, Ontario L7N 3N1  
Tel: 1-905-333-9066  
Fax: 1-905-333-1824

### EUROPE

##### European Headquarters

CP Clare nv  
Bampslaan 17  
B-3500 Hasselt (Belgium)  
Tel: 32-11-300868  
Fax: 32-11-300890

##### France

Clare France Sales  
Lead Rep  
99 route de Versailles  
91160 Champlan  
France  
Tel: 33 1 69 79 93 50  
Fax: 33 1 69 79 93 59

##### Germany

Clare Germany Sales  
ActiveComp Electronic GmbH  
Mitterstrasse 12  
85077 Manching  
Germany  
Tel: 49 8459 3214 10  
Fax: 49 8459 3214 29

##### Italy

C.L.A.R.E.s.a.s.  
Via C. Colombo 10/A  
I-20066 Melzo (Milano)  
Tel: 39-02-95737160  
Fax: 39-02-95738829

##### Sweden

Clare Sales  
Comptronic AB  
Box 167  
S-16329 Spånga  
Tel: 46-862-10370  
Fax: 46-862-10371

##### United Kingdom

Clare UK Sales  
Marco Polo House  
Cook Way  
Bindon Road  
Taunton  
UK-Somerset TA2 6BG  
Tel: 44-1-823 352541  
Fax: 44-1-823 352797

### ASIA PACIFIC

##### Asian Headquarters

Clare  
Room N1016, Chia-Hsin, Bldg II,  
10F, No. 96, Sec. 2  
Chung Shan North Road  
Taipei, Taiwan R.O.C.  
Tel: 886-2-2523-6368  
Fax: 886-2-2523-6369

<http://www.clare.com>

*Clare cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in this Clare product. No circuit patent licenses nor indemnity are expressed or implied. Clare reserves the right to change the specification and circuitry, without notice at any time. The products described in this document are not intended for use in medical implantation or other direct life support applications where malfunction may result in direct physical harm, injury or death to a person.*

Specification: PB-CM10-R1  
©Copyright 2001  
Molded Ultra-Mini DYAD™, Molded Mini DYAD™, and  
Molded DYAD® are trademarks of Clare, Inc.  
All rights reserved. Printed in USA.  
4/23/01