

CVXO-016T Model

5X7 mm SMD, 5V, HCMOS/TTL

Lead Free
RoHS
Compliant

Voltage Controlled Crystal Oscillator







Designed to meet today's requirements for 5V Voltage Controlled Crystal Oscillator SMD Applications. The CVXO-016T provides a disable function for ICT (in-circuit-testing). Available on 16mm tape and reel in quantities of 1K.

Frequency Range:	1MHz to 52MHz
Frequency Stability:	±25ppm to ±100ppm
Temperature Range:	
Operating:	0°C to 70°C
(Option X)	-40°C to 85°C
Storage:	-55°C to 125°C
Input Voltage:	5V ±0.5V
Control Voltage:	2.5V ±2.0V
Settability At Nominal:	2.5V ±0.5V
Control Range:	±100ppm Min
Input Current:	40mA Max
Output:	HCMOS/TTL
Load:	15pF / 10 TTL
Symmetry:	40/60% Max @ 50% Vdd
Rise/Fall Time:	5ns Max @ 20% to 80% Vdd
Logic:	"0" = 10% Vdd Max "1" = 90% Vdd Min
Linearity:	±10% Max

Aging: <3ppm 1st/yr, <1ppm every year thereafter


Dimensions inches (mm)

All dimensions are Max unless otherwise specified.



0.01uF Bypass Capacitor Recommended

RECOMMENDED REFLOW SOLDERING PROFILE

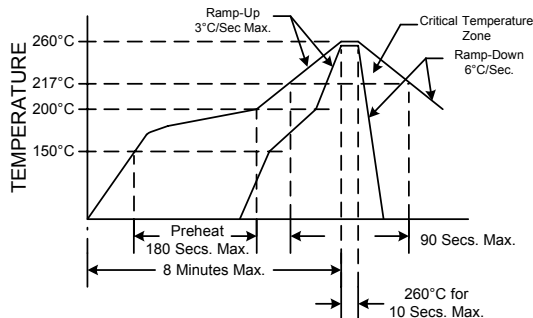

NOTE: Reflow Profile with 240°C peak also acceptable.

PIN	Connection
1	Cont. Volt.
2	Tri-State
3	GND
4	O/P
5	N/C
6	Vdd

*Settability is the Control Voltage at which the Output Frequency is equal to the nominal Frequency.

Crystek Part Number Guide

CVXO-016T X - 25 - 49.152

#1	#2	#3	#4	#5
#1 Crystek VCXO	#2 Model	#3 Temp. Range: Blank= 0/70°C, X= -40/85°C	#4 Stability: (see Table 1)	#5 Frequency in MHz: 3 or 6 decimal places

Stability Indicator	
Blank (std)	± 100ppm
25	± 25ppm
50	± 50ppm

Table 1

Example:
CVXO-016TX-25-25.000 = 5.0V Tristate, -40/85°C, 40/60, 25ppm, 25.000 MHz
CVXO-016T-50-19.660800 = 5.0V Tristate, 0/70°C, 40/60, 50ppm, 19.660800 MHz

Tri-State Function	
Tri-State pin	Output pin
Open	Active
"1" level 2.7V Min	Active
"0" level 0.3V Max	High Z

Specifications subject to change without notice.

TD-021003 Rev. D



Crystek Crystals Corporation

12730 Commonwealth Drive • Fort Myers, FL 33913
239.561.3311 • 800.237.3061 • FAX: 239.561.1025 • www.crystek.com