

Crystek Corporation

Part Number: CXOH20-BP-10.000

Temperature Compensated Crystal Oscillator TCXO

Applications

- Test Equipment
- RF Sources

Features

- High Stability
- Excellent Phase Noise
- AT-Cut Crystal
- Mechanical Trimmer

Frequency Options

- 10.000 MHz
- 16.000 MHz
- 20.000 MHz
- 25.000 MHz



FREQUENCY STABILITIES	MIN	TYP	MAX	UNITS	CONDITIONS
Frequency Overall Stability	-1.0		+1.0	PPM	-10° to +60°C (reference @ 25°C)
Frequency vs Input Voltage	-0.3		+0.3	PPM	for ±5.0% change in Vcc
Frequency vs Load	-0.3		+0.3	PPM	
Frequency vs 1 year aging	-1.0		+1.0	PPM	
Frequency adjustment range	±3.0			PPM	mechanical trim

Supply Voltage / Current	MIN	TYP	MAX	UNITS	CONDITIONS
Supply Voltage	+4.5	+5	+5.5	VDC	
Supply Current			20	mA	

HCMOS OUTPUT	MIN	TYP	MAX	UNITS	CONDITIONS
Signal Level (Voh)	4.5			VDC	
Signal Level (Vol)			0.5	VDC	
Duty Cycle	40		60	%	@ Vcc/2
Load		15		pF	

PN: CXOH20-BP-10.000 Rev. C



Crystek Crystals Corporation

12730 Commonwealth Drive • Fort Myers, FL 33913
239.561.3311 • 800.237.3061 • FAX: 239.561.1025 • www.crystek.com

Page 1 of 3


OUTPUT CHARACTERISTICS	MIN	TYP	MAX	UNITS	CONDITIONS
Phase Noise		-75		dBc/Hz	@ 10Hz Offset
		-105			@ 100Hz Offset
		-125			@ 1KHz Offset
		-135			@ 10KHz Offset
		-140			@ 100KHz Offset
Start-Up Time			10	msec	
Rise Time, Fall Time			5	nsec	

ABSOLUTE MAXIMUM RATING	MIN	TYP	MAX	UNITS	CONDITIONS
Supply Voltage			7	VDC	
Storage Temperature	-55		+90	°C	
Load			50	pF	


ENVIRONMENTAL CONDITIONS	
SHOCK	IEC 68-2-27 (Test Ea) 30G, 10mSec, Half Sine
VIBRATION	IEC 68-2-6 (Test Fc) 0.35mm, 10G, 5-500Hz, 6 cycles/axis
THERMAL SHOCK	IEC 68-2-14 (Test Na) 30 min. in each extreme temperature
HUMIDITY	MIL-STD-202 method 106D

PN:CXOH20-BP-10.000 Rev. C



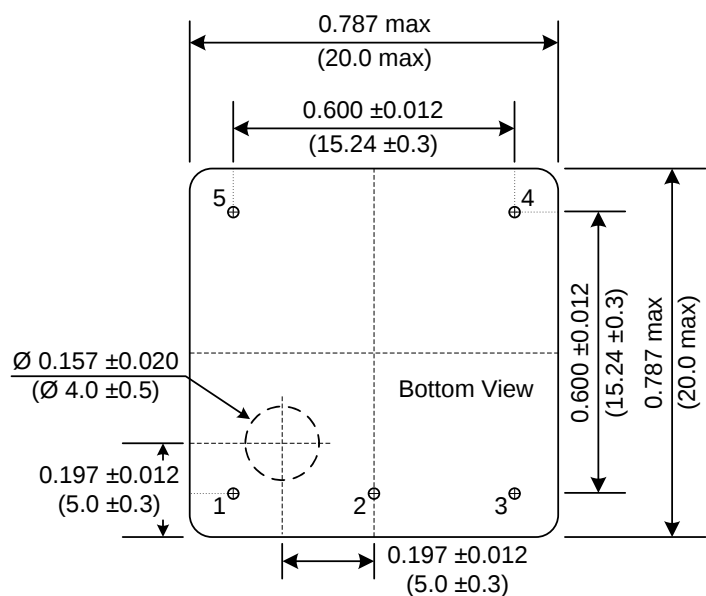

Pin	Function
1	NC
2	RF Output
3	Supply Voltage
4	Case Ground
5	Case Ground

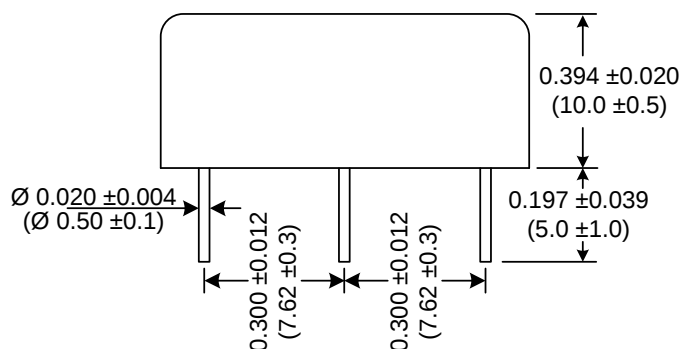

● Unless otherwise specified,
Dimensions are in: $\frac{\text{IN}}{(\text{mm})}$