



CYNA/CYNB16

16Amp - 400/600/800/1000V - **SCR**

Applications

- Motor Control
- Overvoltage Crowbar Protection
- Capacitive Discharge Ignition
- Voltage Regulation
- Welding Equipment
- Capacitive Filter Soft Start (Inrush Current Control)


> **Suitable for General Purpose AC Switching**

> **IGT 25 mA Max.**


> **VDRM/VRMM 400, 600, 800, 1000V**

Absolute Maximum Ratings


	CONDITIONS	SYMBOL	RATING
RMS On-State Current (full sine wave)	$T_c = 110^\circ\text{C}$ $T_c = 95^\circ\text{C}$ TO-220AB TO-220AB Iso	$I_T(\text{RMS})$	16A
Average On-State Current	$T_c = 110^\circ\text{C}$ $T_c = 95^\circ\text{C}$ TO-220AB TO-220AB Iso	$I_T(\text{AV})$	10A
Non Repetitive Surge Peak On-State Current (Full Cycle, T_j Initial = 25°C)	F = 50 Hz F = 60 Hz	I_{TSM}	190A 200A
I^2t Value for fusing	$t_p = 10 \text{ ms}$	I^2t	180A ² s
Critical rate of rise of on-state current $I_G = 2 \times I_{GT}$, $t_r < 100 \text{ ns}$, $T_j = 125^\circ\text{C}$		di/dt	100A/ μs
Peak Gate Current @ $T_j = 125^\circ\text{C}$	$t_p = 20 \mu\text{s}$	I_{GM}	4A
Average Gate Power Dissipation @ $T_j = 125^\circ\text{C}$		$PG(\text{AV})$	1W
Storage Temperature Range		T_{stg}	-40 to +150 $^\circ\text{C}$
Operating Junction Temperature Range		T_j	-40 to +125 $^\circ\text{C}$
Isolation Voltage (CYNA Series only)		V_{ISO}	2500V _{RMS}
Maximum Peak Reverse Gate Voltage		V_{RGM}	5V



TO-220AB Isolated
(CYNA25)



TO-220AB Non-Isolated
(CYNB25)



Electrical Characteristics NOTE 1

$I_{GT} \text{ MAX @ } V_D = 12 \text{ V, } R_L = 30\Omega$		25mA
$V_{GT} \text{ MAX @ } V_D = 12 \text{ V, } R_L = 30\Omega$		1.3V
$V_{GD} \text{ MIN @ } V_D = V_{\text{DRM}}, R_L = 3.3k\Omega$	$T_j = 125^\circ\text{C}$	0.2V
$I_H \text{ MAX @ } I_T = 500 \text{ mA (gate open)}$		40mA
$I_L \text{ MAX @ } I_G = 1.2 I_{GT}$		60mA
$dv/dt \text{ MIN @ } V_D = 67\%V_{\text{DRM}} \text{ (gate open)}$	$T_j = 125^\circ\text{C}$	500V/ μs
$V_{TM} \text{ MAX @ } I_{TM} = 32 \text{ A, } t_p = 380\mu\text{s}$	$T_j = 25^\circ\text{C}$	1.6V
$V_{to} \text{ MAX (Threshold Voltage)}$	$T_j = 125^\circ\text{C}$	0.77V
$R_d \text{ MAX (Dynamic Resistance)}$	$T_j = 125^\circ\text{C}$	23m Ω
$I_{\text{DRM}} \text{ MAX @ } V_{\text{DRM}} = V_{\text{RRM}}$	$T_j = 25^\circ\text{C}$	5 μA
$I_{\text{RRM}} \text{ MAX @ } V_{\text{DRM}} = V_{\text{RRM}}$	$T_j = 125^\circ\text{C}$	2mA

ISO9001 Certified



GENERAL NOTES

1. All parameters at 25 degrees C unless otherwise specified.

Thermal Resistances

		SYMBOL	RATING
Junction to Case (AC)	T0-220AB	$R_{th(j-c)}$	1.2°C/W
Junction to Case (AC)	T0-220AB Isolated	$R_{th(j-c)}$	2.1°C/W
Junction to Ambient	T0-220AB	$R_{th(j-a)}$	60°C/W
Junction to Ambient	T0-220AB Isolated	$R_{th(j-a)}$	60°C/W

Part Number Designation

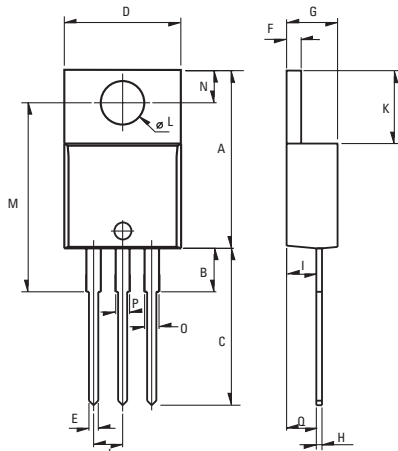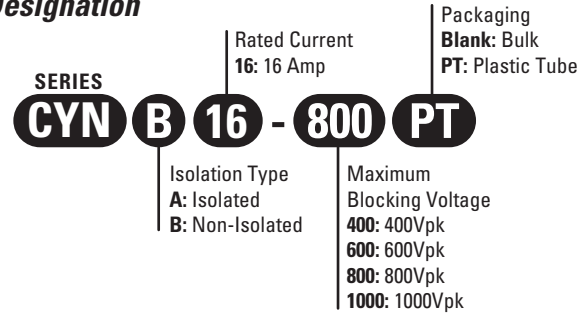

Weight: 2.3g (0.08 oz)

Dimensions

REF.	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	15.24		15.75	0.6		0.62
B		3.23			0.127	
C	12.78		13.79	0.503		0.543
D	9.96		10.36	0.392		0.408
E	0.69		0.94	0.027		0.037
F	1.22		1.32	0.048		0.052
G	4.62		4.83	0.182		0.19
H	0.46		0.61	0.018		0.024
I	2.49		2.84	0.098		0.112
J	2.39		2.69	0.094		0.106
K	6.48		6.88	0.255		0.271
L	3.78		3.89	0.149		0.153
M	15.49	16	16.51	0.61	0.63	0.65
N	2.59		2.9	0.102		0.114
O	0.99		1.55	0.039		0.061
P	0.99		1.55	0.039		0.061
Q		2.67			0.105	

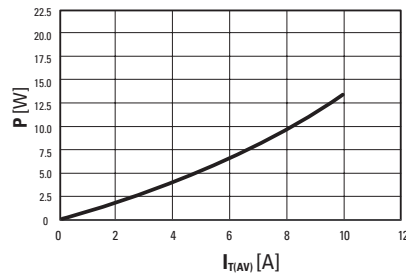


Fig. 1: Power dissipation versus average on-state current.

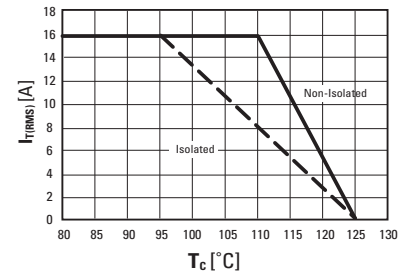


Fig. 2: RMS on-state current versus case temperature (full cycle)

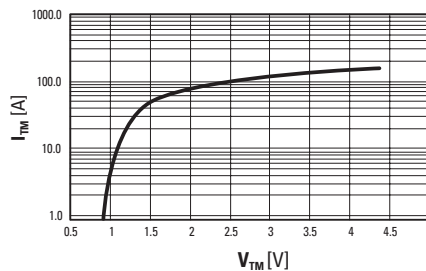


Fig. 3: On-state current versus on-state voltage (instantaneous values)

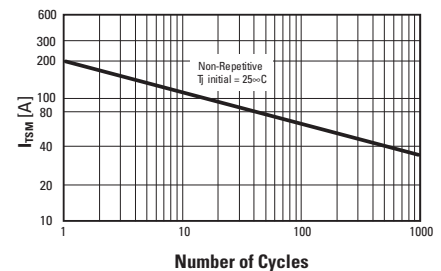


Fig. 4: Non-repetitive surge peak on-state current versus number of cycles.

ISO9001 Certified

Approvals

UL - E72445

USA

Sales Support (877) 502-5500

Tech Support (877) 702-7700

Fax (619) 710-8540

Email: sales@crydom.com

Crydom Corp

2320 Paseo de las Americas, Suite 201

San Diego, CA 92154

EUROPE - UK

Telephone +44 (0) 1202 365070

Fax +44 (0) 1202 365090

Email: intsales@crydom.com

Crydom International Ltd.

7 Cobham Road

Ferndown Industrial Estate

Wimborne, Dorset BH21 7PE

Germany

Telephone +49 (0) 180 3000 506

ASIA - Thailand

Telephone +66 (0)2 665 2517

Fax +66 (0)2 665 2588

Crydom Asia

18/8 Fico Place 12th Floor

Soi Sukhumvit 21 (Asoke)

Klongtoey Nua, Wattana

Bangkok, Thailand 10110