



FEATURES

- Self-powered, two-terminal operation
- 350 to 600Vac operating input range
- Half-wave averaging, rms calibrated
- Large, easy-to-read, bright red LED display
- Rugged, epoxy-encapsulated construction
- Built-in bezel for panel mounting
- Reliable screw terminals for easy installation
- Small 1.38" x 0.88" x 1.0" package

FUNCTIONAL SPECIFICATIONS

Input

Voltage Range ① 350-600Vrms (47-63Hz)
Current Consumption 50mArms (max.)

Performance

Sampling Rate 2.5 readings/second
Measurement Type Half-wave average, rms calibrated

Accuracy @ +25°C for sinusoidal input ±1V (typ.), ±2V (max.)
Temperature Drift (-25 to +60°C) ±0.15 Volts/°C (max.)

Mechanical

Dimensions 1.38" x 0.88" x 1.00"
Display Type 3 digit, red LED, 0.37"/9.4mm
Weight 1 ounce (28 grams)
Case Material Polycarbonate

Environmental

Operating Temperature -25 to +60°C
Storage Temperature -40 to +75°C
Humidity (Non-condensing) 0 to 95%

① Operation and accuracy at inputs above or below this range are not specified.

ORDERING INFORMATION


- DMS-20PC-3-LM-C** 350-600Vac line monitor with screw terminals and screws
DMS-BZL3-C Panel mount bezel
DMS-BZL4-C Panel mount bezel with sealing gasket
DMS-20-CP Panel cutout punch

Brass screws (6-32 thread) and a panel-mount retaining clip are supplied with each meter.

DATEL's DMS-20PC-3-LM is a low-cost, self-powered, 2-wire digital voltmeter designed for monitoring 480Vac 3-phase primary power. The DMS-20PC-3-LM's unique power-supply design allows a single model to operate from 350 to 600Vac (47-63Hz). The meter requires no external components or auxiliary power for full operation! Its large, 0.37"/9.4mm, bright red LED display is easily readable under virtually all lighting conditions.

DMS-20PC-3-LM employs rms calibrated, half-wave sinusoidal averaging to achieve a display resolution of 1Vac over its full operating range. Packaged in a subminiature (1.38" x 0.88" x 1.0") red-filter case with a built-in bezel, the meter is epoxy encapsulated for ruggedness. An optional bezel assembly, featuring metal fasteners, simplifies panel mounting.

This easy-to-use, vibration-proof voltmeter is the ideal digital upgrade for fragile analog-style panel meters in 480Vac power distribution equipment. It similarly excels in any new application requiring accurate, high-voltage, ac line monitoring.

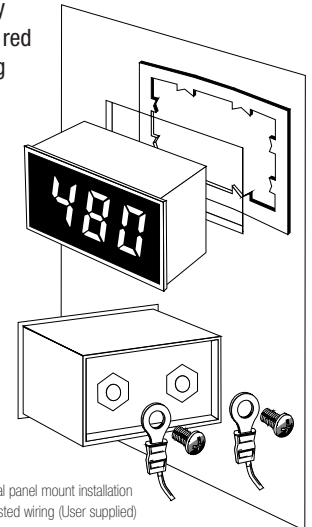


Typical panel mount installation
Suggested wiring (User supplied)

MECHANICAL SPECIFICATIONS

Dimensions in inches (millimeters)

Tolerances: 2 PL Dec ±0.02 (±0.51)
3 PL Dec ±0.010 (±0.254)

Recommended panel cutout dimensions:
1.336 (33.93)W x 0.838 (21.29)H
Internal corner radii 0.032 (0.81) Max.

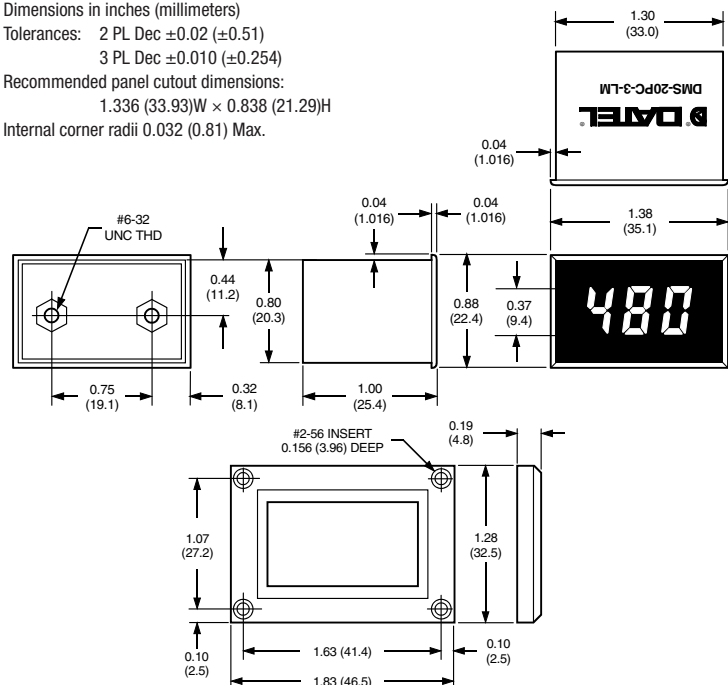

For updated, full-size data sheets visit: www.cd4power.com



C&D Technologies, Inc.

11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.

Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356

www.cd4power.com email: sales@cdtechno.com

ISO 9001 REGISTERED

DS-0388C 12/04/06

© 2006 C&D Technologies, Inc.

C&D Technologies, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice. The DATEL logo is a registered C&D Technologies, Inc. trademark.

USA: Tucson (Az), Tel: (800) 547 2537, email: sales@cdtechno.com

Canada: Toronto, Tel: (866) 740 1232, email: toronto@cdtechno.com

United Kingdom: Milton Keynes, Tel: +44 (0)1908 615232, email: mk@cdtechno.com

France: Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@cdtechno.com

Germany: München, Tel: +49 (0)89-544334-0, email: ped.munich@cdtechno.com

Japan: Tokyo, Tel: 3-3779-1031, email: sales_tokyo@cdtechno.com

Osaka, Tel: 6-6354-2025, email: sales_osaka@cdtechno.com

Website: www.cd4power.jp

China: Shanghai, Tel: +86 215 027 3678, email: shanghai@cdtechno.com

Guangzhou, Tel: +86 208 221 8066, email: guangzhou@cdtechno.com