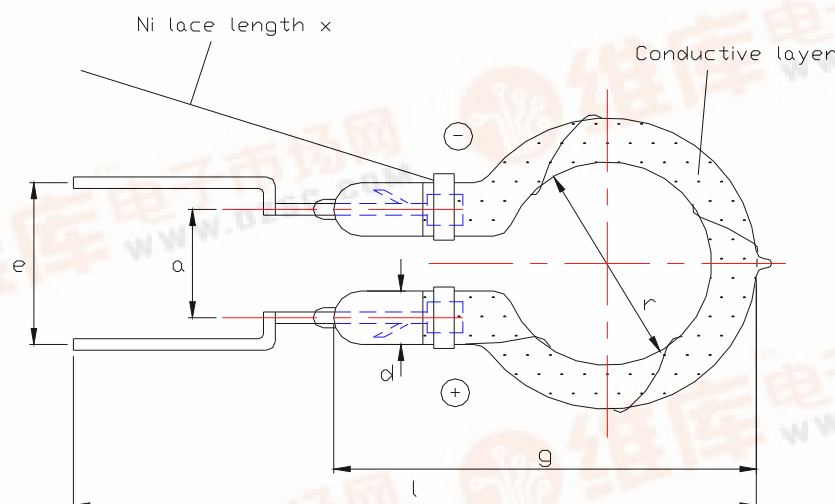


DEVICE NAME : DR 7760
Mechanical Data :
Page # : 1 of 1
Date : 12/08/98
ISSUED BY : Joan Low
Rev Date : Index #:

Dimension(mm)

e	15 ± 1.5	l	59 ± 2	d	7 ± 0.5 dia
r	13 ± 1.5 dia	g	40 ± 2	x	75 ± 5
a	9 ± 1				

Polarity :
Without Colour Corrective Coating :
Remarks:

1. Envelope material : Q1, Q2 or Q3

Operating Data :

Max. Power Pmax/W		Trigger coil TR	ZS 1052
Nom. Power Pnom / W		Trigger capacitor Cz/μF	0.1
Max. flashenergy Emax/Ws	230	Min. trigger voltage Uz min/V	200
Nom. flashenergy Enom/Ws		Trigger contact S	SCR
Max. anode voltage Uamax/V	550	Flash frequency/Hz	
Nom. anode voltage Uanom/V	500	Life/Number of flashes/N	10000
Min. anode voltage Uamin/V	350	Repetition rate trep/ s	20
Nom.flash capacitor CB/ μF		Sec trigger voltage Uz sec / KV	- 7.8
Light reduction after life/ %		(Unloaded)	

Remarks :