

KEC**SEMICONDUCTOR
TECHNICAL DATA****E50A21VBS, E50A21VBR****STACK SILICON DIFFUSED DIODE**

ALTERNATOR DIODE FOR AUTOMOTIVE APPLICATION.

FEATURES

- Average Forward Current : $I_O=50A$.
- Zener Voltage : 21V(Typ.)

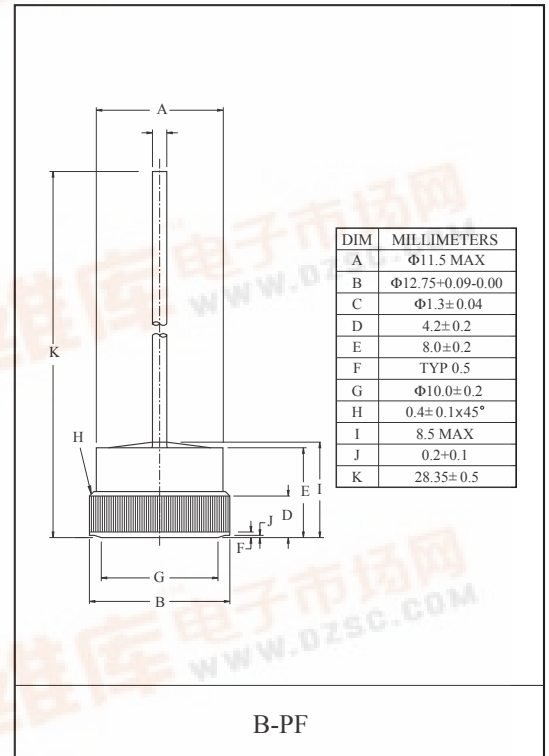
POLARITY

E50A21VBS (+ Type)

E50A21VBR (- Type)

MAXIMUM RATING ($T_a=25^{\circ}C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Average Forward Current	$I_{F(AV)}$	50	A
Peak 1 Cycle Surge Current	I_{FSM}	380 (60Hz)	A
Non-Repetitive Peak Reverse Surge Current (10mS)	I_{RSM}	55	A
Transient Peak Reverse Voltage	V_{RSM}	19	V
Peak Reverse Voltage	V_{RM}	16	V
Junction Temperature	T_j	-40~215	$^{\circ}C$
Storage Temperature Range	T_{stg}	-40~215	$^{\circ}C$

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage	V_F	$I_{FM}=100A$	-	-	1.05	V
Zener Voltage	V_Z	$I_Z=10mA$	19	21	23	V
Reverse Current	I_R	$V_R=18V$	-	-	0.3	μA
Transient Thermal Resistance	$\angle V_F$	$I_{FM}=100A, I_M=100mA, P_w=100mS$	-	-	60	mV
Breakdown Voltage	V_{br}	$I_{rsm}=55A, P_w=10mS$	-	-	32	V
Temperature Coefficient	α_T	$I_Z=10mA$	-	15.7	-	mV/ $^{\circ}C$
Reverse Leakage Current Under High Temperature	HI_R	$T_a=150^{\circ}C, V_R=18V$	-	-	100	μA
Temperature Resistance	R_{th}	DC total junction to case	-	-	0.6	$^{\circ}C/W$