

POWEREX INC

02 DE 7294621 0002958 0

POWEREX

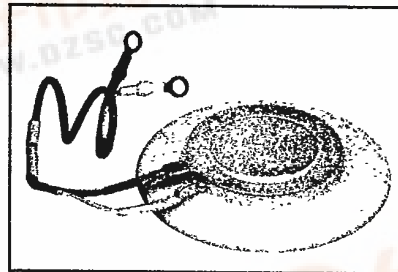
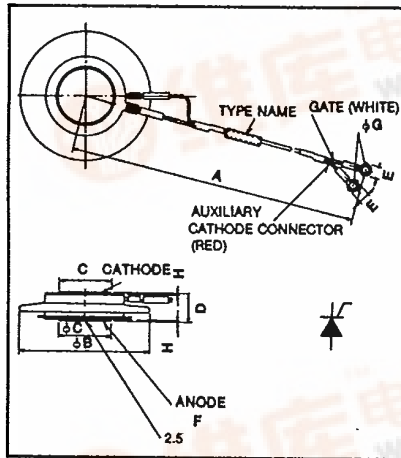
T-25-19

FT500AH

Powerex, Inc. Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

Phase Control SCR

**320 Amperes Avg
3000-4000 Volts**



FT500AH
Phase Control SCR
320 Amperes/3000-4000 Volts

Description

Powerex Silicon Controlled Rectifiers (SCR) are designed for phase control applications. These are all-diffused, Press-Pak (Pow-R-Disc) devices employing center-fired gate.

Features:

- ☐ Low On-State Voltage
- ☐ High di/dt
- ☐ High dv/dt
- ☐ Hermetic Packaging
- ☐ Excellent Surge and I²t Ratings

Applications:

- ☐ Power Supplies
- ☐ Battery Chargers
- ☐ Motor Control
- ☐ Light Dimmers
- ☐ VAR Generators

Ordering Information

Example: Select the complete nine digit part number you desire from the table - i.e. FT500AH-60 is a 3000 Volt, 320 Ampere Phase Control SCR.

FT500AH
Outline Drawing

Dimensions	Inches	Metric
A	11.42 ± .40	290 ± 10
φB	3.346	85
φC	1.339	34
D	.71 ± .02	18 ± 0.5
E	.30	7.5
F	M5	M5 × 0.8
φG	.169	4.3
H	.015 Min	0.4 Min

Type	Voltage		Current
	V _{ORM} V _{RRM}	Code	
FT500AH	3000	-60	320
	3500	-70	
	4000	-80	

POWEREX INC

02 DE 7294621 0002959 1



T-25-19

Powerex, Inc., Hills Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

FT500AH**Phase Control SCR**

320 Amperes Avg/3000-4000 Volts

Absolute Maximum Ratings

	Symbol	FT500AH	Units
RMS On-State Current	$I_{T(RMS)}$	500	Amperes
Average On-State Current	$I_{T(av)}$	320	Amperes
Peak One-Cycle Surge (Non Repetitive) On-State Current (60Hz)	I_{TSM}	5000	Amperes
Peak One-Cycle Surge (Non-Repetitive) On-State Current (50Hz)	I_{TSM}	4550	Amperes
Critical Rate-of-Rise of On-State Current (Non-Repetitive)	di/dt	300	Amperes/ μs
Critical Rate-of-Rise of On-State Current (Repetitive)	di/dt	100	Amperes/ μs
I^2t (for Fusing), one cycle at 60Hz	I^2t	1.0×10^5	A^2sec
Peak Gate Power Dissipation	P_{GM}	10	Watts
Average Gate Power Dissipation	$P_{G(av)}$	3	Watts
Storage Temperature	T_{STG}	-40 to 150	$^{\circ}C$
Operating Temperature	T_J	-40 to 125	$^{\circ}C$
Mounting Force ^①		3000 to 4000	lb.
Mounting Force ^①		1350 to 1800	kg

① Consult recommended mounting procedures.

POWEREX INC

02 DE 7294621 0002960 8



T-25-19

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

FT500AH**Phase Control SCR**

320 Amperes Avg/3000-4000 Volts

Electrical and Thermal Characteristics

Characteristics	Symbol	Test Conditions	FT500AH	Units
Voltage—Blocking State Maximums				
Forward Leakage, Peak	I_{DRM}	$T_J = 125^\circ\text{C}$, V_{RRM} applied	30	mA
Reverse Leakage, Peak	I_{RRM}	$T_J = 125^\circ\text{C}$, V_{RRM} applied	30	mA
Current—Conducting State Maximums				
Peak On-State Voltage	V_{TM}	$I_{TM} = 1000\text{A}$, $T_J = 125^\circ\text{C}$	2.85	Volts
Switching				
Min. Critical dv/dt exponential to V_{DRM}	dv/dt	$T_J = 125^\circ\text{C}$, $V_D = \frac{1}{2}V_{DRM}$	200	V/ μsec
Thermal				
Maximum Thermal Resistance, [ⓐ] double sided cooling Junction to Sink	$R_{\theta JS}$		.05	$^\circ\text{C}/\text{Watt}$
Gate—Maximum Parameters				
Gate Current to Trigger	I_{GT}	$V_D = 6\text{V}$, $T_J = 25^\circ\text{C}$, $R_L = 2\Omega$	200	mA
Gate Voltage to Trigger	V_{GT}	$V_D = 6\text{V}$, $T_J = 25^\circ\text{C}$, $R_L = 2\Omega$	2.5	Volts
Non-Triggering Gate Voltage	V_{GDM}	$T_J = 125^\circ\text{C}$, $V_D = 1/2 V_{DRM}$	.20	Volts
Peak Forward Gate Current	I_{GTM}		4	Amperes
Peak Reverse Gate Voltage	V_{GRM}		5	Volts

[ⓐ] Consult recommended mounting procedures.



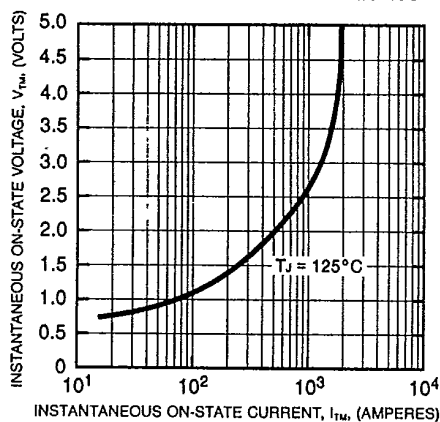
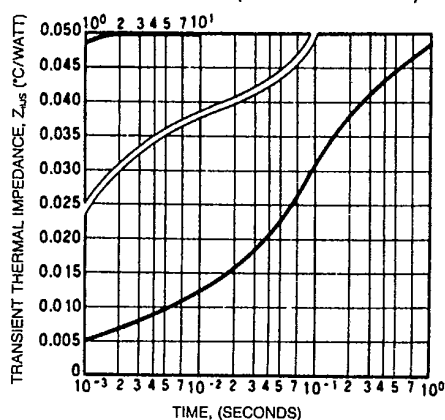
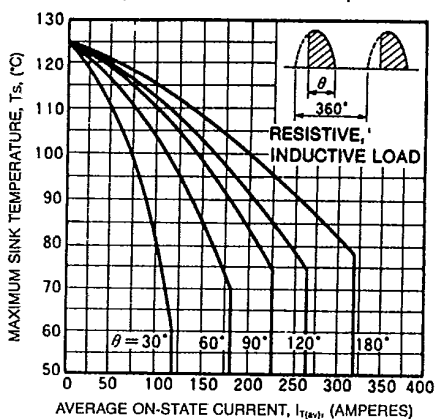
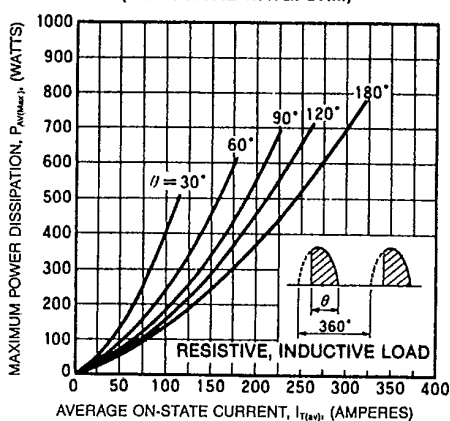
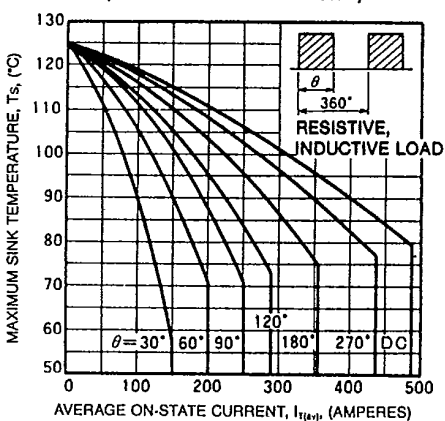
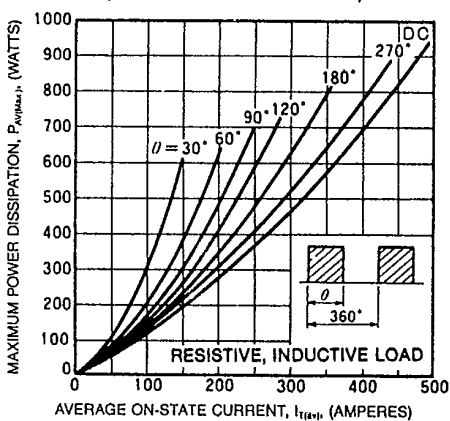
T-25-19

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

FT500AH**Phase Control SCR**

320 Amperes Avg/3000-4000 Volts

MAXIMUM ON-STATE CHARACTERISTICS**TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (JUNCTION TO SINK)****MAXIMUM ALLOWABLE SINK TEMPERATURE (SINUSOIDAL WAVEFORM)****MAXIMUM ON-STATE POWER DISSIPATION (SINUSOIDAL WAVEFORM)****MAXIMUM ALLOWABLE SINK TEMPERATURE (RECTANGULAR WAVEFORM)****MAXIMUM ON-STATE POWER DISSIPATION (RECTANGULAR WAVEFORM)**



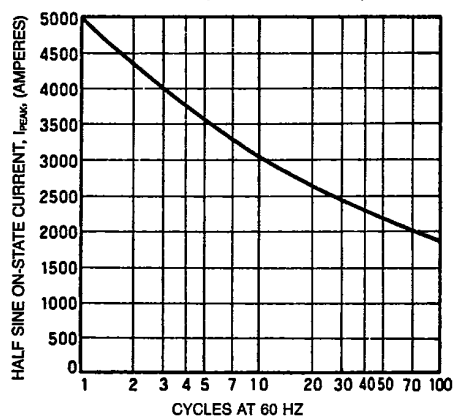
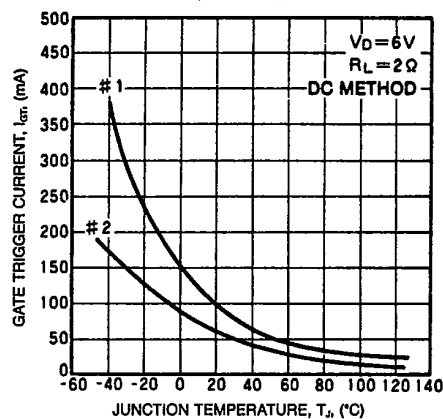
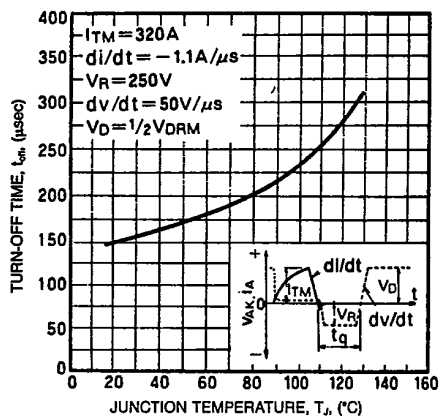
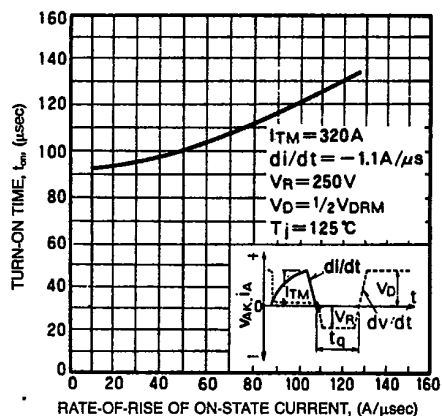
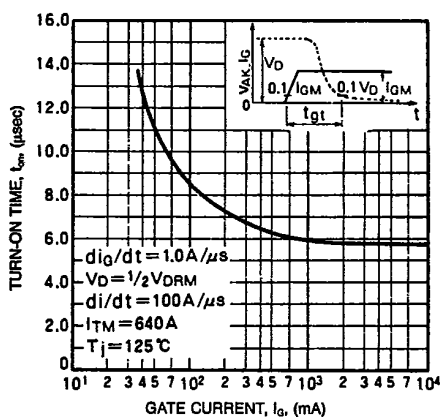
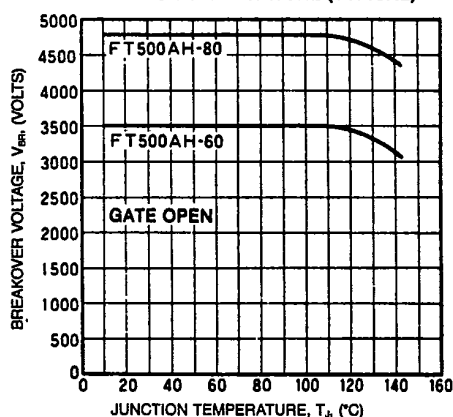
T-25-19

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

FT500AH**Phase Control SCR**

320 Amperes Avg/3000-4000 Volts

MAXIMUM ALLOWABLE SURGE ON-STATE CURRENT (NON-REPETITIVE)**GATE TRIGGER CURRENT (TYPICAL)****TURN-OFF TIME VS. JUNCTION TEMPERATURE (TYPICAL)****TURN-ON TIME VS. RATE-OF-RISE (TYPICAL)****TURN-ON TIME VS. GATE CURRENT****BREAKOVER VOLTAGE vs. JUNCTION TEMPERATURE (TYPICAL)**



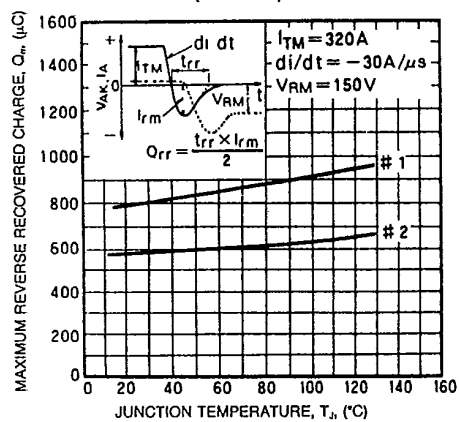
T-25-19

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

FT500AH**Phase Control SCR**

320 Amperes Avg/3000-4000 Volts

**REVERSE RECOVERED CHARGE
(TYPICAL)****GATE CHARACTERISTICS**