

Ordering number : EN5318A


N-Channel Silicon MOSFET

FW202**SANYO****Ultrahigh-Speed Switching Applications****Features**

- Low ON resistance
- Ultrahigh-speed switching.
- Composite type with two 4V-drive N-channel MOSFETs facilitating high-density mounting.
- Matched pair capability.

Package Dimensions

unit: mm

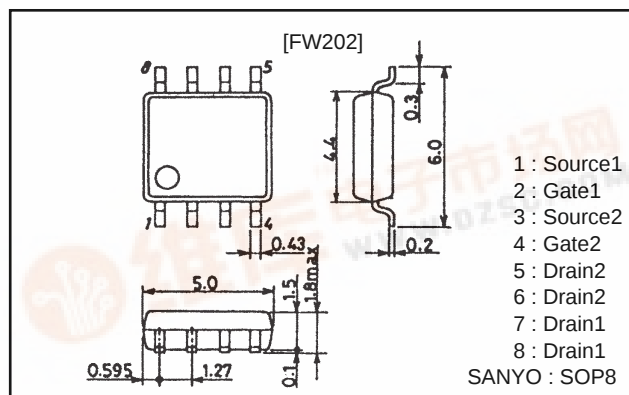2129-SOP8**Specifications****Absolute Maximum Ratings** at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Drain-to-Source Voltage	V_{DS}		20	V
Gate-to-Source Voltage	V_{GS}		± 20	V
Drain Current (DC)	I_D		5	A
Drain Current (pulse)	I_{DP}	$PW \leq 10\mu s$, duty cycle $\leq 1\%$	48	A
Allowable Power Dissipation	P_D	Mounted on a ceramic board (1000mm ² ×0.8mm) 1unit	1.7	W
Total Dissipation	P_T	Mounted on a ceramic board (1000mm ² ×0.8mm)	2.0	W
Channel Temperature	T_{ch}		150	°C
Storage temperature	T_{stg}		-55 to +150	°C

Electrical Characteristics at Ta=25°C

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
D-S Breakdown Voltage	$V_{(BR)DSS}$	$I_D=1mA$, $V_{GS}=0$	20			V
Zero-Gate-Voltage Drain Current	I_{DSS}	$V_{DS}=20V$, $V_{GS}=0$			100	μA
Gate-to-Source Leakage Current	I_{GSS}	$V_{GS}=\pm 16V$, $V_{DS}=0$			± 10	μA
Cutoff Voltage	$V_{GS(off)}$	$V_{DS}=10V$, $I_D=1mA$	1.0		2.5	V
Forward Transfer Admittance	$ y_{fs} $	$V_{DS}=10V$, $I_D=5A$	5	8		S
Static Drain-to-Source ON-State Resistance	$R_{DS(on)}$	$I_D=5A$, $V_{GS}=10V$		32	40	m Ω
	$R_{DS(on)}$	$I_D=5A$, $V_{GS}=4V$		48	65	m Ω
Input Capacitance	C_{iss}	$V_{DS}=10V$, $f=1MHz$		550		pF
Output Capacitance	C_{oss}	$V_{DS}=10V$, $f=1MHz$		400		pF
Reverse Transfer Capacitance	C_{rss}	$V_{DS}=10V$, $f=1MHz$		130		pF

Continued on next page.



FW202


Continued from preceding page.

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Turn-ON Delay Time	$t_{d(on)}$	See specified Test Circuit.		15		ns
Rise Time	t_r	"		100		ns
Turn-OFF Delay Time	$t_{d(off)}$	"		150		ns
Fall Time	t_f	"		160		ns
Diode Forward Voltage	V_{SD}	$I_S=5A, V_{GS}=0$		1.0	1.2	V

Switching Time Test Circuit

Electrical Connection

(Top view)

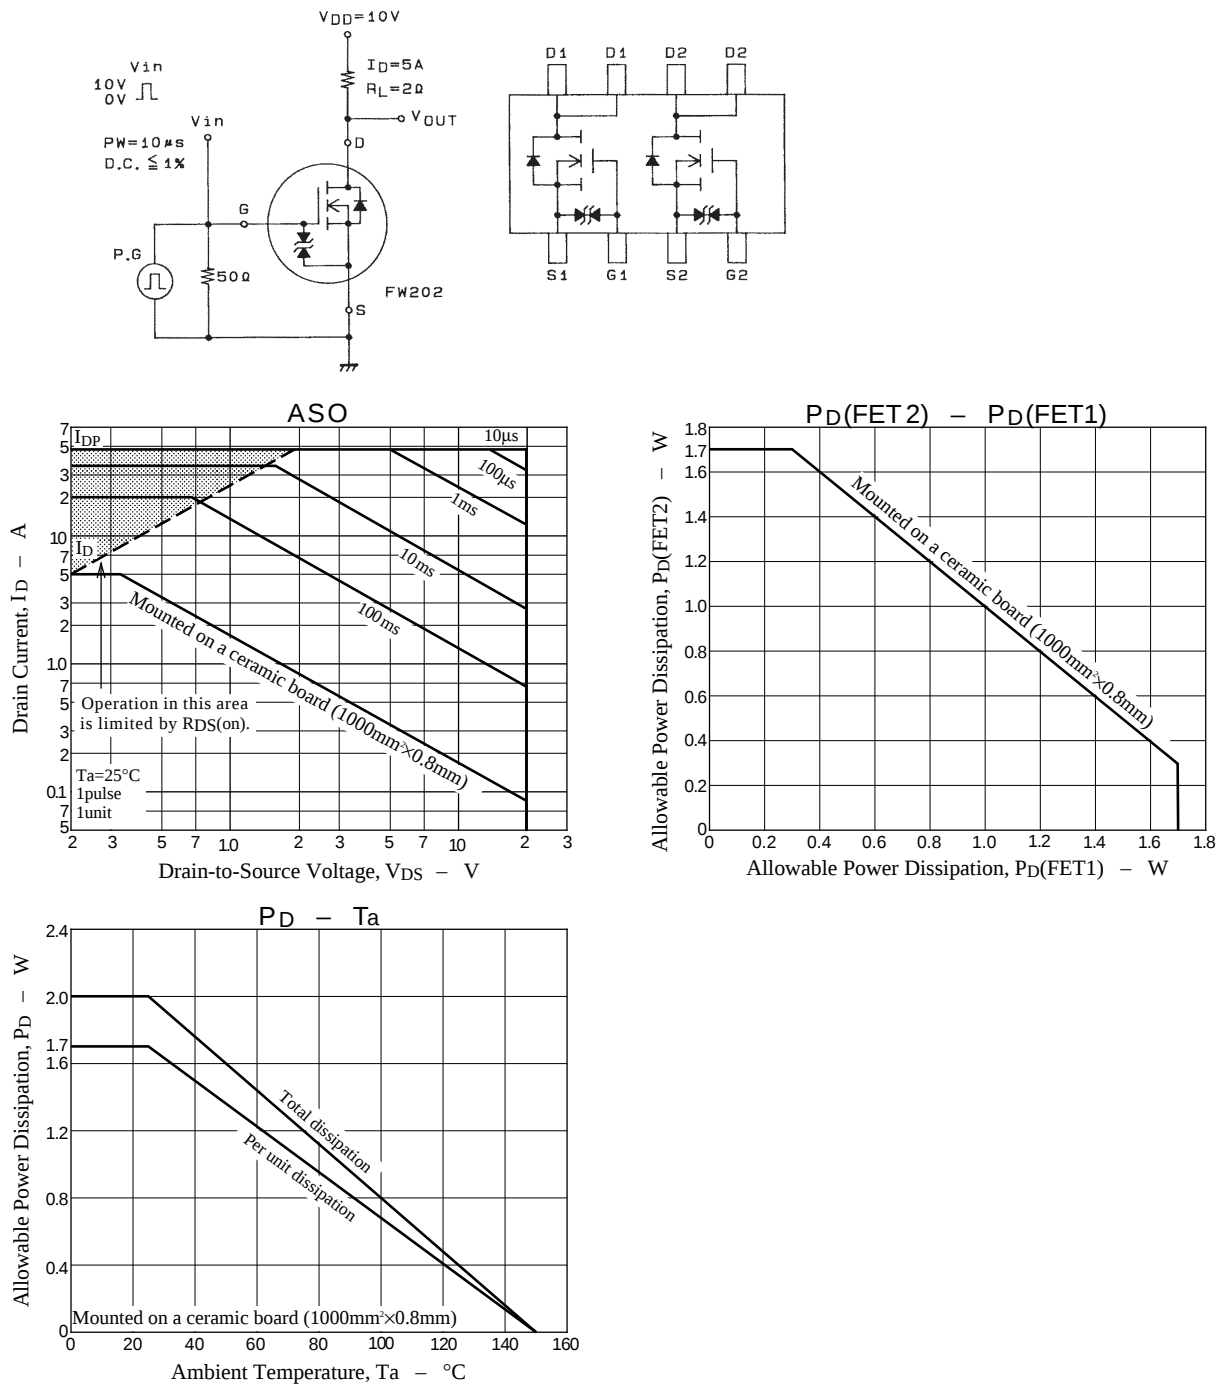

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of October, 1997. Specifications and information herein are subject to change without notice.