

45mm DIN-RAIL SSR



- ▶ Epoxy-Free Design Minimizes Internal Component Stress
- ▶ DIN-RAIL or Panel Mount
- ▶ Relay or Contactor Output Terminal Configuration
- ▶ DBC Substrate for Superior Thermal Performance
- ▶ 100k-cycle UL508 Endurance Rating for Enhanced Reliability
- ▶ Back-to-Back Dual SCR Output
- ▶ No External Transient Protection Required (Internal TVS)
- ▶ Zero-Crossing or Random-Fire Output
- ▶ UL / CSA / TUV Approved, CE Compliant
- ▶ EMC Compliant for Reliable Operation in Harsh Environments



Output Specifications

Voltage range (Vrms)	48-600Vac	48-600Vac
Output Current	35	45
Peak Voltage (Vpk, t = 1 min.)	1100	1100
Off-state leakage uArms (@ 480V & Ta = 25°C)	250	250
Minimum Current (mArms)	100	100
Max. 1 cycle surge current (Apk, Ta = 25°C)	770	800
Max. 1 second surge current (Apk, Ta = 25°C)	150	160
Forward voltage drop (Vpk @ Imax, Ta = 25°C)	1.35	1.35
I ² T (60Hz, ½ cycle)	2500	2600
Static off-state dv/dt (Vµs, Ta = 25°C)	500	500
HP Ratings at 240V	2	3
HP Ratings at 480V	3	4
Output Type	SCR	SCR
Min/Max stranded wire	16/8 AWG	16/8 AWG
Min/Max solid wire	16/10 AWG	16/10 AWG

Input Specifications

Input voltage	4-32Vdc	90-140VAC	180-280VAC
Drop out voltage	1Vdc	10VAC	10VAC
Min. input current (for on-state)	16mA	5mA	6mA
Maximum input current	19mA	6mA	8mA
Input Resistance (Ohms)	Current Regulated		
Turn-on time*	8.33msec	20mSec	20mSec
Turn-off time	8.33msec	30mSec	30mSec
Min/Max stranded/solid wire	24/16 AWG	24/16 AWG	24/16 AWG

* Random SSR's turn on in less than 100µs

General Characteristics

Operating Temperature (°C)**	-20 to + 80
Storage Temperature (°C)	-40 to + 100
Input to output isolation	4000Vrms
Input/output to ground isolation	2500Vrms
Input to output capacitance	8pF (typical)
Operating Frequency	47 to 63 Hz
Housing Material	UL 94V0 (self extinguishing)
Weight (grams)	400
Input/Output Torque	

** -20 to +60 for 180-280VAC input

Standards of Compliance


CE Compliant with the LVD 73/23/EEC	
UL Recognized per UL 508 and CSA C22.2 no. 14-95	
TUV Certified per EN 60950	
IEC 62314	
IEC 60068-2-6	35mm/10-55Hz
IEC 60068-2-27	15G / 11ms
IEC 61000-4-2 Level 3	Electrostatic Discharge
IEC 61000-4-3 Level 3	Radiated Electromagnetic Noise
IEC 61000-4-4 Level 3	Immunity to Electrically Fast Transients
IEC 61000-4-5 Level 3	Immunity to Electrical Surges
IEC 61000-4-6 Level 3	Conducted Electromagnetic Noise
CISPR 11 Class A	Conducted and Radiated Noise for Industrial Environments
Pollution Degree 2	

Part Numbers


Zero Crossing Output				
Relay Configuration	Rating	Output	Input	Part Number
	35 Amp	48-600Vac	180-280VAC	GNR35AHZ
	35 Amp	48-600Vac	90-140VAC	GNR35BHZ
	35 Amp	48-600Vac	4-32Vdc	GNR35DHZ
	45 Amp	48-600Vac	180-280VAC	GNR45AHZ
	45 Amp	48-600Vac	90-140VAC	GNR45BHZ
Random Fire Output				
Relay Configuration	Rating	Output	Input	Part Number
	35 Amp	48-600Vac	4-32Vdc	GNR35DHR
	45 Amp	48-600Vac	4-32Vdc	GNR45DHR

Part Numbers

Zero Crossing Output				
Contactor Configuration	Rating	Output	Input	Part Number
	35 Amp	48-600Vac	180-280VAC	GNR35ACZ
	35 Amp	48-600Vac	90-140VAC	GNR35BCZ
	35 Amp	48-600Vac	4-32Vdc	GNR35DCZ
	45 Amp	48-600Vac	180-280VAC	GNR45ACZ
	45 Amp	48-600Vac	90-140VAC	GNR45BCZ
Random Fire Output				
Contactor Configuration	Rating	Output	Input	Part Number
	35 Amp	48-600Vac	4-32Vdc	GNR35DCR
	45 Amp	48-600Vac	4-32Vdc	GNR45DCR






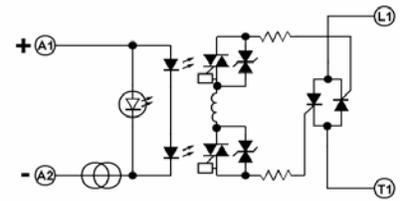


DC Input Equivalent Circuit






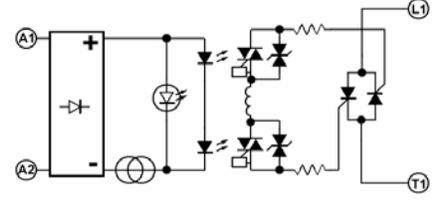


AC Input Equivalent Circuit

GNR DIN-Rail SSR Derate Curves

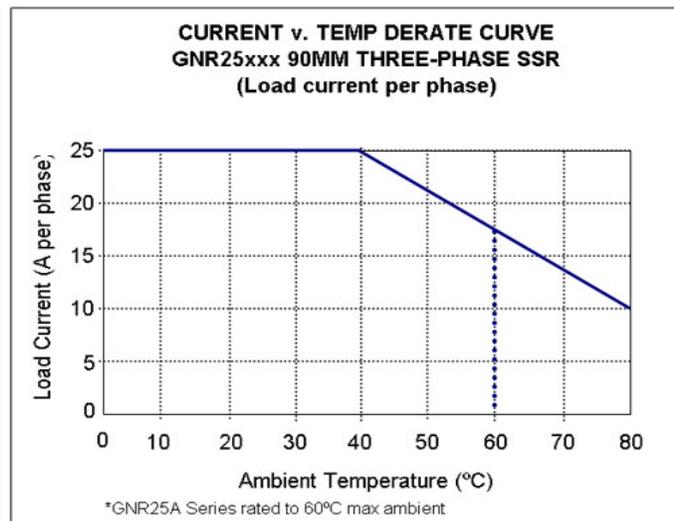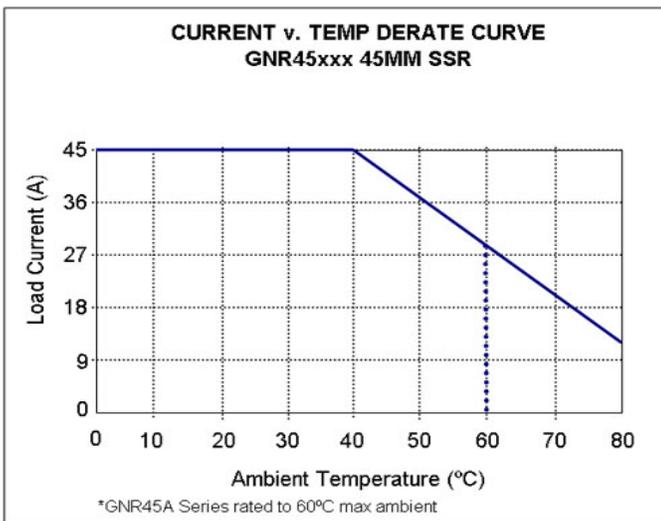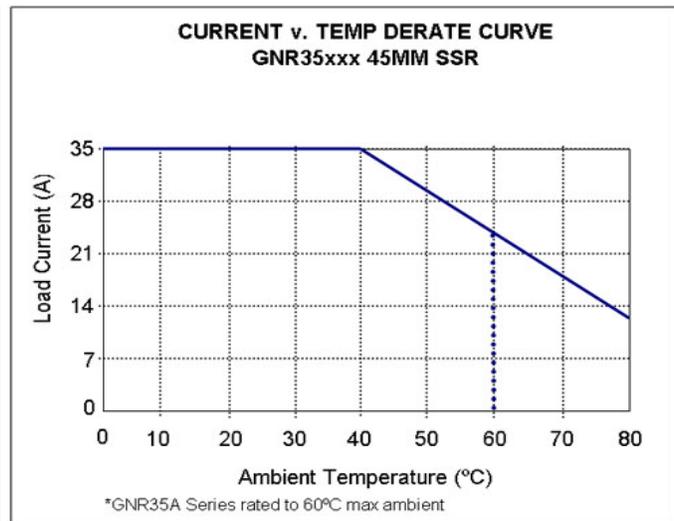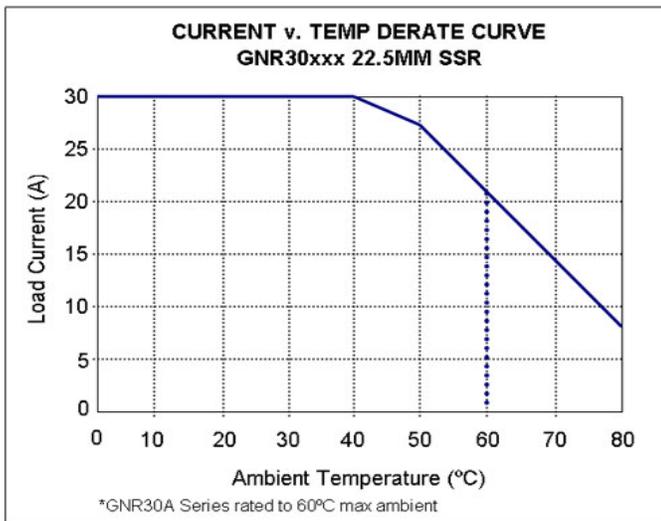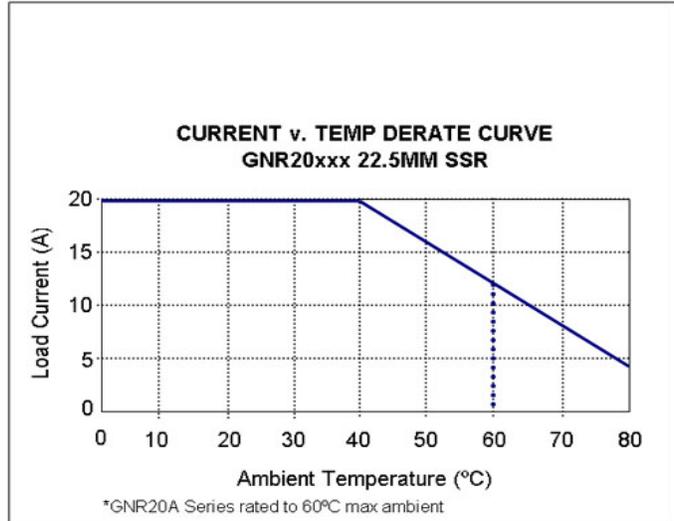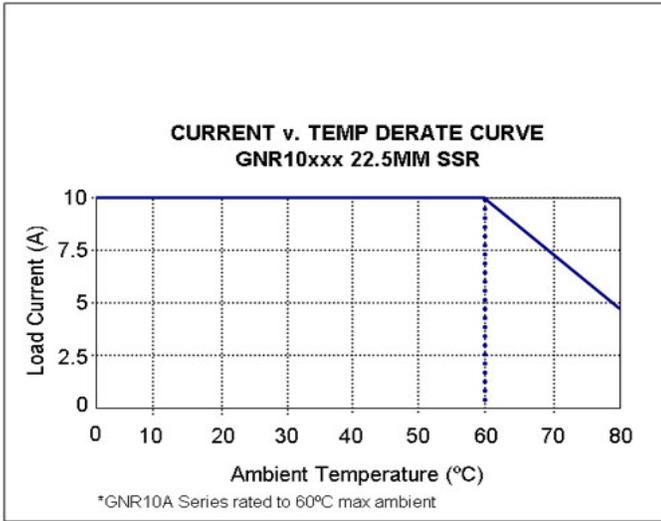

GNR DIN-Rail SSR Horizontal Spacing Requirements

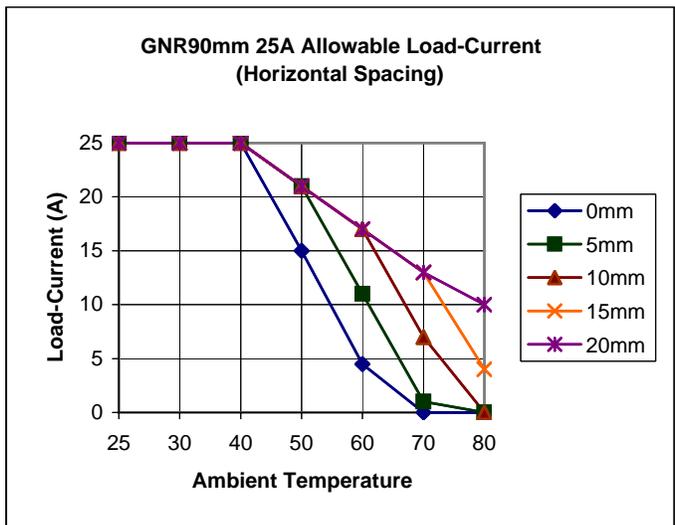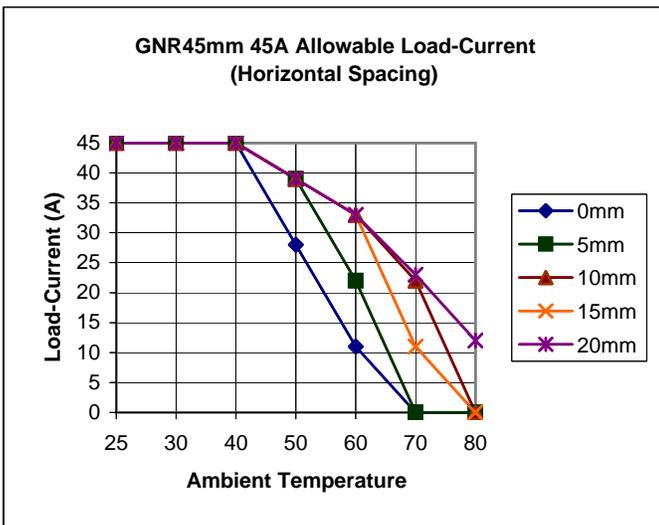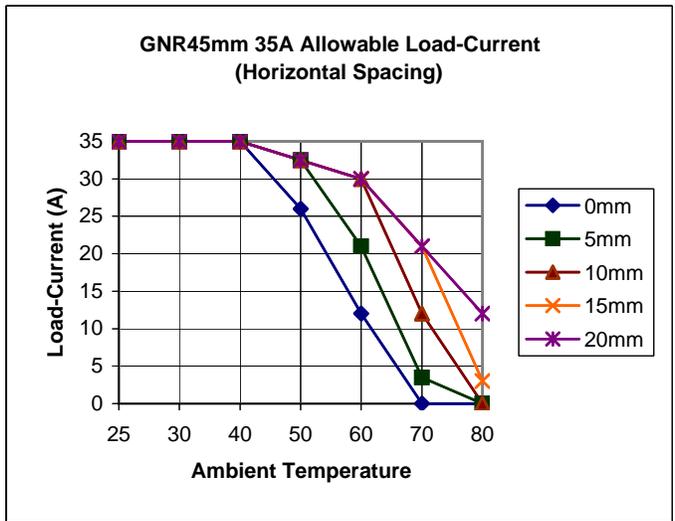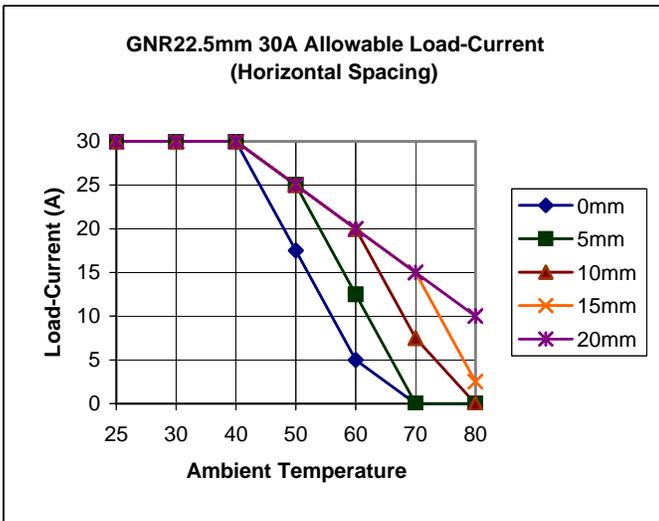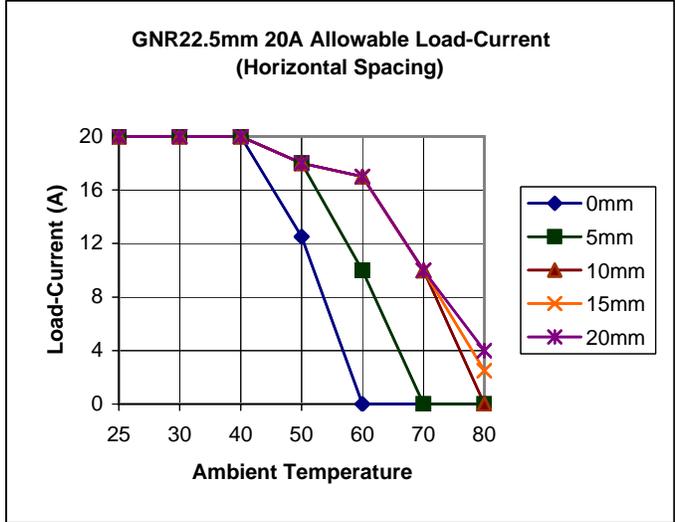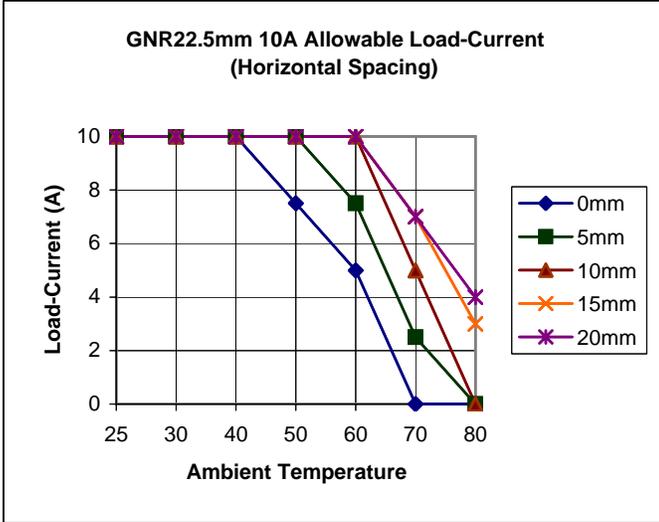

DIN-Rail SSR Dimensional Drawings



Dimensions mm (inches)

