

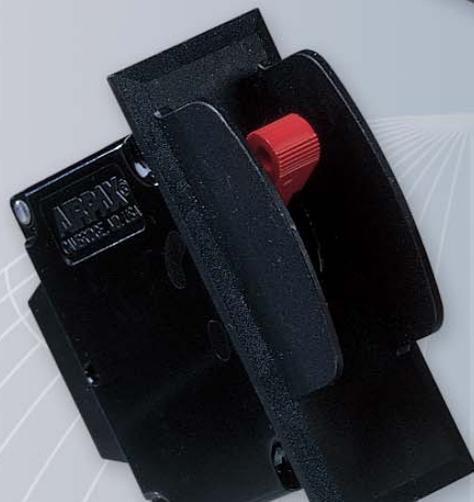


# AIRPAX

IAG/IUG/IEG/CEG/LEG  
Magnetic Circuit Protectors

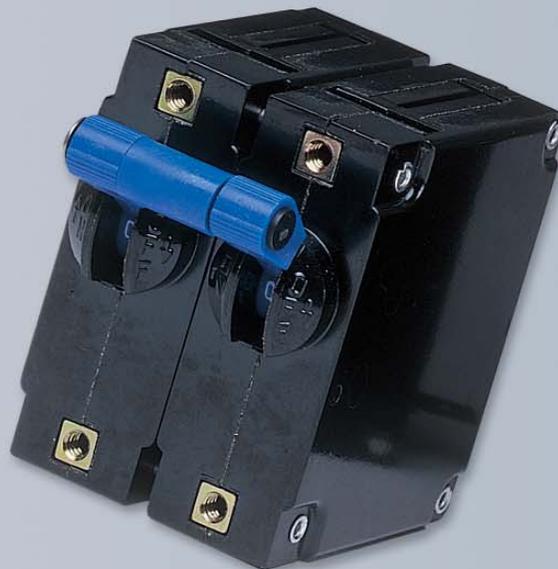

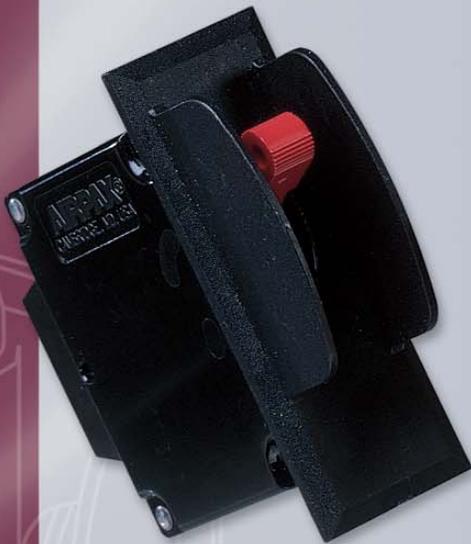

Single Pole Circuit Protectors	83
Multi-Pole Circuit Protectors	84
IAGX/IUGX/IEGX/CEGX/IAGZX/IUGZX /IEGZX/CEGZX/LEGZX Circuit Protectors	86
IAGBX/IUGBX/IEGBX/ CEGBX/LEGBX Circuit Protectors	87
IAGN/IUGN Circuit Protectors	88
IEGS/CEGS/LEGS/IEGHS/ CEGHS/LEGHS Snap-In Circuit Protectors	89
Configurations	91
Operating Characteristics	93
Delay Curves	94
Specifications	98
IAG/IUG/IEG/CEG Decision Tables	100
LEG Decision Tables	102

**IAG/IUG/IEG/CEG/LEG Magnetic Circuit Protectors** provide low-cost power switching, reliable circuit protection and accurate circuit control for equipment in the international marketplace.

IEG models comply with IEC specifications 601 and 950 and VDE specifications 0804 and 0805. In addition, they are UL Recognized as Supplementary Protectors per UL 1077, CSA Certified as Supplementary Protectors per CSA 22.2 No. 235, VDE Approved to VDE 0642 (EN60934), CCC Approved and CE Compliant. IAG models are for those applications where the unit's inherent attributes are desired, but compliance with the various standards is not required.



Designed using the latest in sensitive hydraulic magnetic technology, the IAG/IUG/IEG/CEG/LEG line adapts itself to many applications and environments. They're ideal for data processing and business machines, medical instrumentation, broadcast equipment, vending and amusement machines, military applications and wherever precision operation is required. Temperature differences which affect fuses and other thermal devices are not a concern.

One important feature of this protector line is a "trip free" action, which means the circuit will trip in the presence of an overload even though the handle is held in the ON position. The delay mechanism senses the fault and the contacts open.


The IAG/IUG/IEG/CEG/LEG is available in a wide variety of configurations including series, series with auxiliary switch, shunt and relay with a choice of delays and ratings in either DC, 50/60Hz or 400Hz versions. Handles come in seven different colors and international markings are standard. Single or multi-pole versions are available, with a variety of pole arrangements to meet your specifications. Four pole models require a double toggle handle. Units with a handle per pole come in one through six pole assemblies.




**Single Pole Protector**

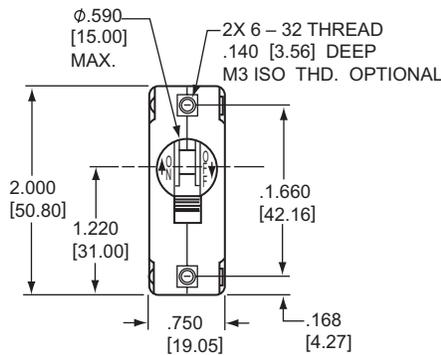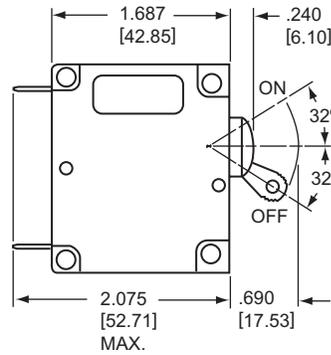

**Single Pole Mounting Detail**

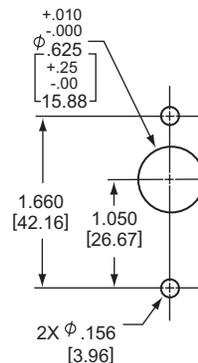

**LEG Type Units Require Screw Terminals**

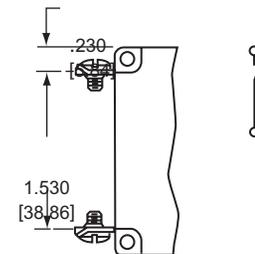

**Note:** Tolerance  $\pm 0.015$  [38] unless noted. Dimensions in brackets [ ] are millimeters.

# IAG/IUG/IEG/CEG/LEG MULTI-POLE CIRCUIT PROTECTORS

## Two Pole Protectors

An assembly consisting of two single pole units, having their trip mechanisms internally coupled and with a single toggle handle, forms the IEG11 with quick-connect D.I.N.-style terminals. Individual poles may differ in ratings, delays and internal connections. An auxiliary switch may be included in either or both poles, allowing you to mix SELV and hazardous voltages. Rugged screw-type terminals can be provided, in which case the designation would be IEG66. The IEGH offers a toggle handle for each pole. LEG type units are available only in one or two pole configurations.


## Three Pole and Four Pole Protectors

The three pole construction consists of three single pole units assembled with an internal mechanical interlock which actuates


all units simultaneously. A single toggle handle operates all three poles for quick and convenient control, or if preferred, a handle per pole is available. The four pole construction consists of four single pole units assembled with an internal mechanical interlock which actuates all units simultaneously. A double toggle handle operates all four poles. The individual poles need not have identical characteristics and any series trip pole may have an auxiliary switch. If screw-type terminals are required, the protector designation will be IEG666 for a three pole version and IEG6666 for a four pole version.

Protector poles are numbered consecutively when viewed from the terminal side, with the ON position up, starting with Pole #1 on the left side and proceeding to the right.


### IAG/IUG/IEG/CEG/LEG

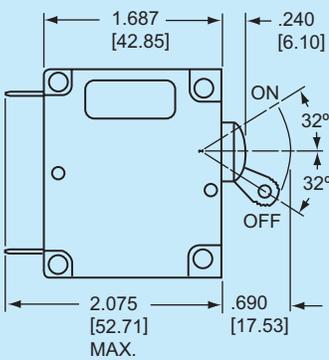


### Two Pole\*

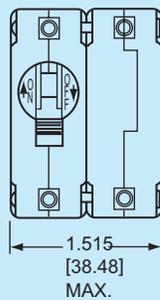

### Three Pole\*

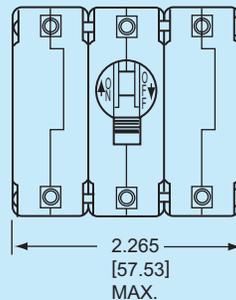


### Four Pole\*

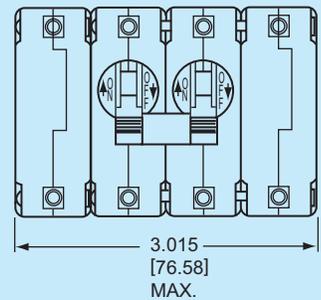


(Optional: Handle may be located in Pole 1 instead of Pole 2)


### LEG Type Units Require Screw Terminals

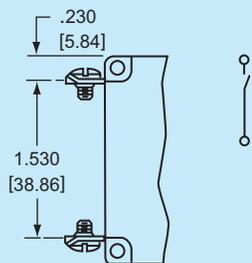


### Two Pole\*

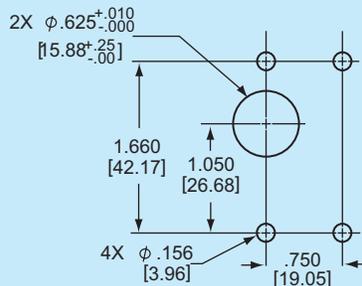

### Three Pole\*

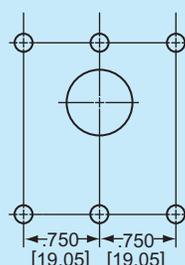

### Four Pole\*

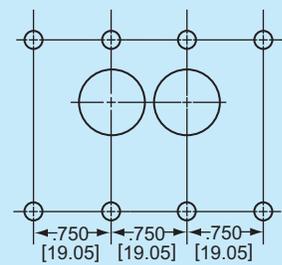


**Panel Mounting Detail:** Tolerance for Mtg.  $\pm .005$  [.13] unless noted.  
\*See Single Pole Mounting Detail for hole sizes and locations. LEG type units are only available in one or two poles.

## IAGH/IUGH/IEGH/CEGH/LEGH Protectors

The IAGH/IUGH/IEGH/CEGH/LEGH two, three and four pole models are available with a handle per pole.


LEGH type units are available only in two pole models.

## IAGH/IUGH/IEGH/CEGH/LEGH Protectors

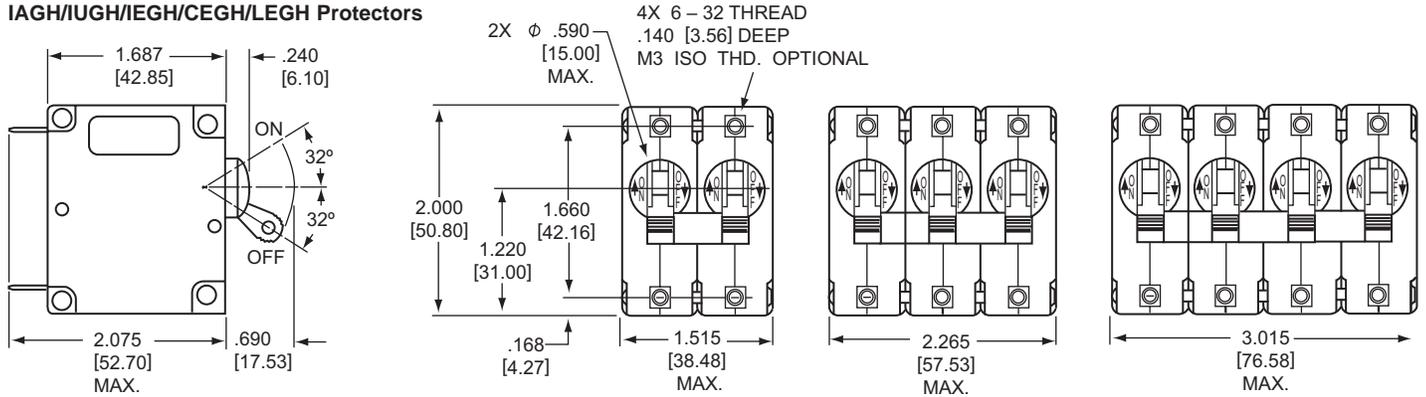


**Panel Mounting Detail:** Tolerance for Mtg.  $\pm$ .005 [.13] unless noted.  
 \*See Two Pole Mounting Detail for hole sizes and locations. LEG type units are only available in one or two poles.


## LEG Type Units Require Screw Terminals

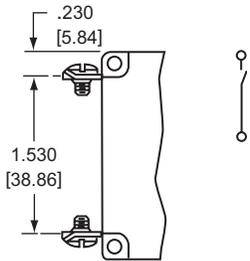


## Two Pole

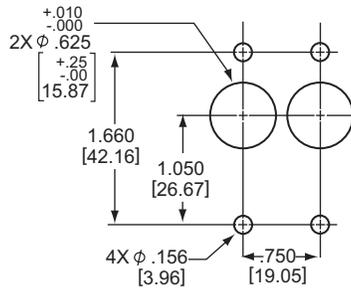

## Three Pole\*

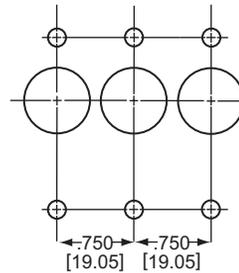



## Four Pole\*

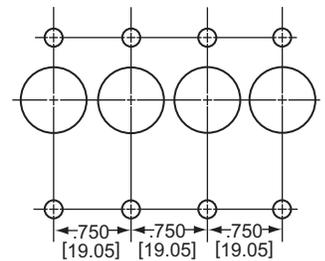



## LEG/LEGH Barriers (required)

In order to meet UL listing requirements, the LEG/LEGH two pole model requires barriers. Available with a standard straight barrier or an optional "Z" type barrier.

## Standard Barrier

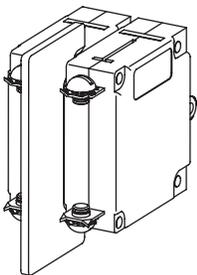

## Optional "Z" Barrier

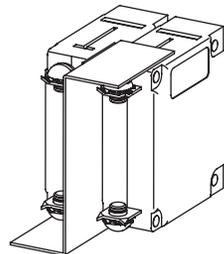

# IAGX/IUGX/IEGX/CEGX/IAGZX/IUGZX/IEGZX/CEGZX/LEGZX ROCKER CIRCUIT PROTECTORS


## Rocker Protectors

The IAGX/IUGX/IEGX/CEGX and IAGZX/IUGZX/IEGZX/CEGZX/LEGZX styles offer two attractive rocker actuator versions of our popular IAG/IUG/IEG/CEG/LEG family. Designed with the operator in mind, each features handles with a concave surface and aesthetic appearance for front panel applications.

Both are available with rocker handle styles in a choice of five single colors: black, red, grey, orange or white.

The IAGZX/IUGZX/IEGZX/CEGZX/LEGZX style adds our “EZ” options of contrasting dual color rocker actuators, affording a clear visual indication of the handle position and integrated handle guards, to help prevent accidental turn-on and turn-off of the unit. Available with a black rocker and white, red or green indicator color for either ON or OFF indication.


### IAGX/IUGX/IEGX/CEGX

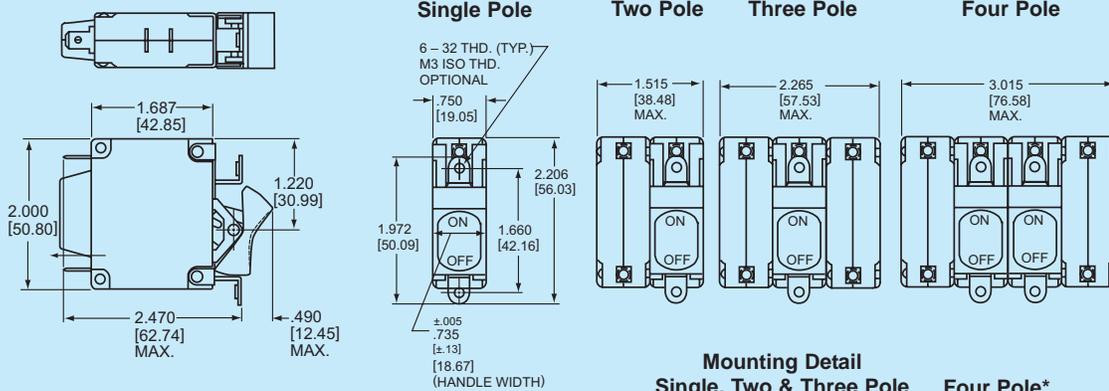

(Optional: Handle may be located in Pole 2 instead of Pole 1)


### Mounting Detail

Single, Two & Three Pole    Four Pole\*

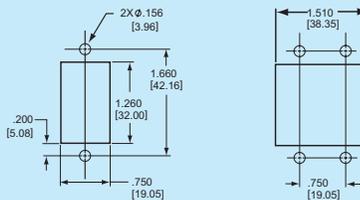


**Panel Mounting Detail:** Tolerance for Mtg. ±.005 [.13] unless noted.  
\*See Single Pole Mounting Detail for hole sizes and locations.

### IAGZX/IUGZX/IEGZX/CEGZX/LEGZX

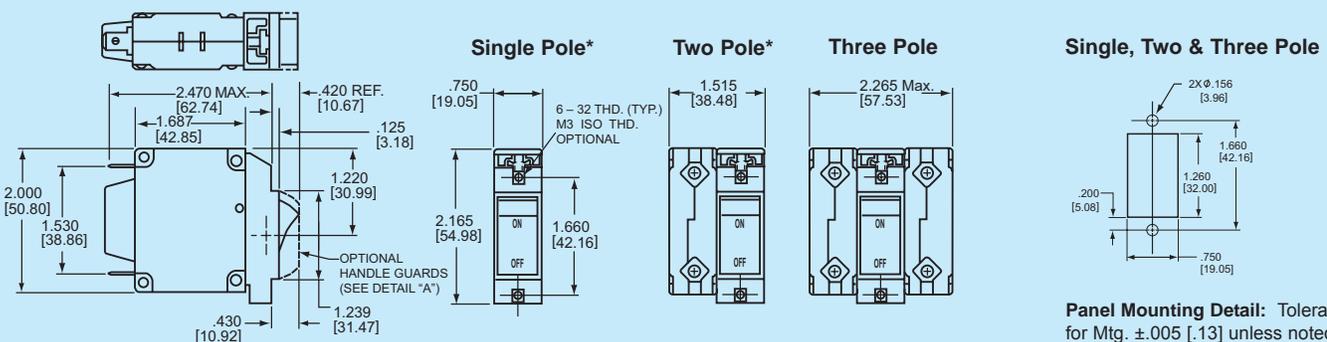

**Panel Mounting Detail:** Tolerance for Mtg. ±.005 [.13] unless noted.

\* LEG type units are only available in one or two poles.



Detail "A"




# IAGBX/IUGBX/IEGBX/CEGBX/LEGBX ROCKER CIRCUIT PROTECTORS

The innovative new design of our IEG BX style circuit protector features a flat front rocker that not only satisfies your aesthetic needs, it guards against accidental actuation while providing the highest degree of circuit protection and quality. Only Airpax offers this new standard in user interface, providing additional peace of mind that guards alone can't supply.

Available on a variety of versions with a full range of agency approvals, the new IEG BX style circuit protectors meet or exceed all current performance specifications, including

interrupting capacities up to 50,000 amperes. Various guard options offer additional and increasing levels of actuation protection performance. The two shot mold on the flat rocker surface provides a clean, crisp legend that can withstand demanding use.

## IAGBX/IUGBX/IEGBX/CEGBX/LEGBX

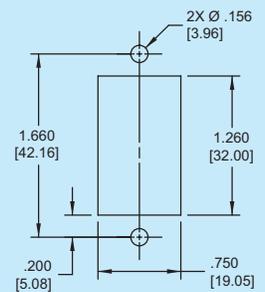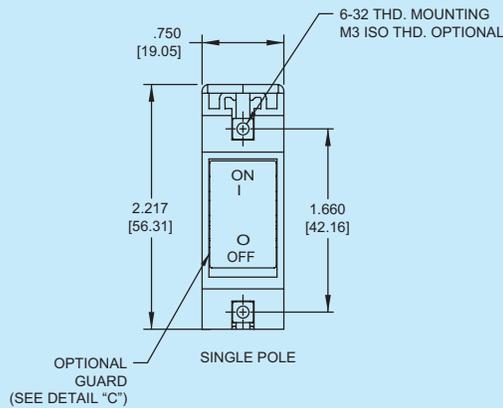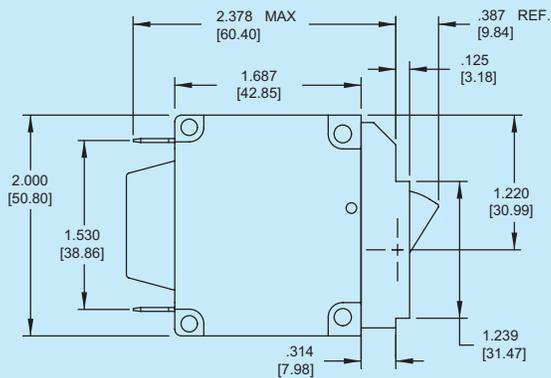

### Panel Mounting Detail

MOUNTING DETAIL TOLERANCE: ±.005 [.13] UNLESS NOTED



IAG/IUG/IEG/CEG/LEG

# IAGN SEALED TOGGLE CIRCUIT PROTECTORS

The IAGN/IUGN family is a sealed toggle version of the IAG/IUG family. The silicone rubber seal around the handle assures panel seal integrity and makes this style a natural for harsh environments.

This sealed toggle family is available in one to three poles with ratings of .050 to 50 amperes.


IAG/IUG/IEG/CEG/LEG

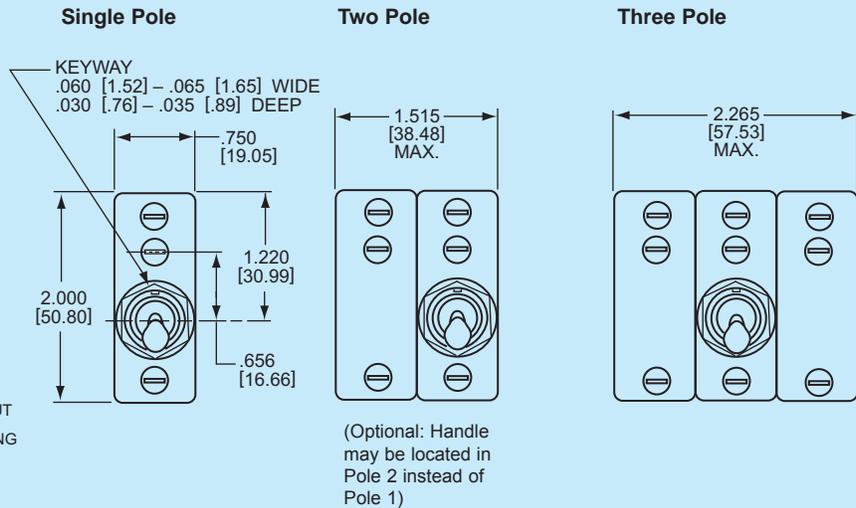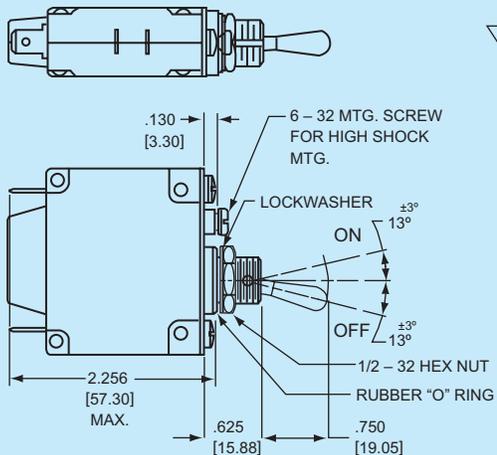


## Optional Handle




## Mounting Detail Single Pole



## Two Pole\*



## Three Pole\*



**Panel Mounting Detail:** Tolerance for Mtg.  $\pm .005$  [.13] unless noted.  
\*See Single Pole Mounting Detail for hole sizes and locations.

**Note:** Tolerance  $\pm .015$  [.38] unless noted. Dimensions in brackets [ ] are millimeters.

# IEGS/IEGHS/CEGS/CEGHS/LEGS/LEGHS SNAP-IN CIRCUIT PROTECTORS

The Snap-In version of the IEG brings mounting simplification and international spacing together in a package that is aesthetically enhanced. The IEGS securely snaps into a rectangular cut-out, eliminating the need for panel mounting hardware and the associated costs. The face plate of the IEGS is a clean, black matte and it satisfies the increasing demand for front panel components that are designed with ergonomic considerations.


The IEGS is offered in either flush or beveled versions, in 1, 2, 3 or 4 pole packages, and with a handle per pole or per unit. The IEGS is UL Recognized, CSA Certified and VDE approved.

Please see pages 98 and 99 for complete specifications.

## IEGHS/CEGHS/LEGHS Circuit Protectors (Note B)


(Multi-Pole-IEGH Handles Per Pole)

(Omit H for Single Pole)

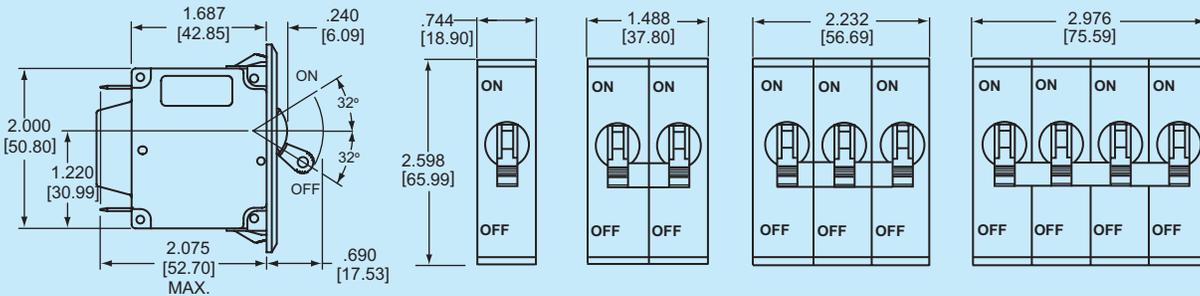


### Panel Cutout Detail

Panel Thickness: (See Table)

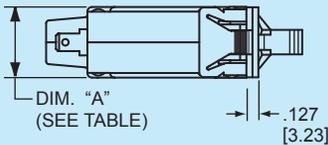

Number of Poles	Dimension "A"
1 pole	.750 max. [19.05]
2 pole	1.515 max. [38.48]
3 pole	2.265 max. [57.53]
4 pole	3.015 max. [76.58]




Number of Poles	Dimension "B"	Dimension "C"	
1 pole	.755 min. [19.18]	2.180 ± .005 [55.37 ± .13]	2.186 ± .011 [55.52 ± .28]
2 pole	1.520 min. [38.61]		
3 pole	2.270 min. [57.66]		
4 pole	3.020 min. [76.71]		
<b>Panel Thickness</b>		.040 - .059 [1.02 - 1.50]	.060 - .100 [1.52 ± 2.54]


**Note:** A: Flush face plate is optional. See decision tables, sixth decision, page 101.  
 B: Tolerance ± .031 [.79] Angles: ±5° unless noted. Dimensions in brackets [ ] are millimeters.

# IEGS/IEGHS/CEGS/CEGHS/LEGS/LEGHS SNAP-IN CIRCUIT PROTECTORS


## IEGS/CEGS/LEGS Circuit Protectors (Note B) (Add H for multiple handles per unit, IEGHS)

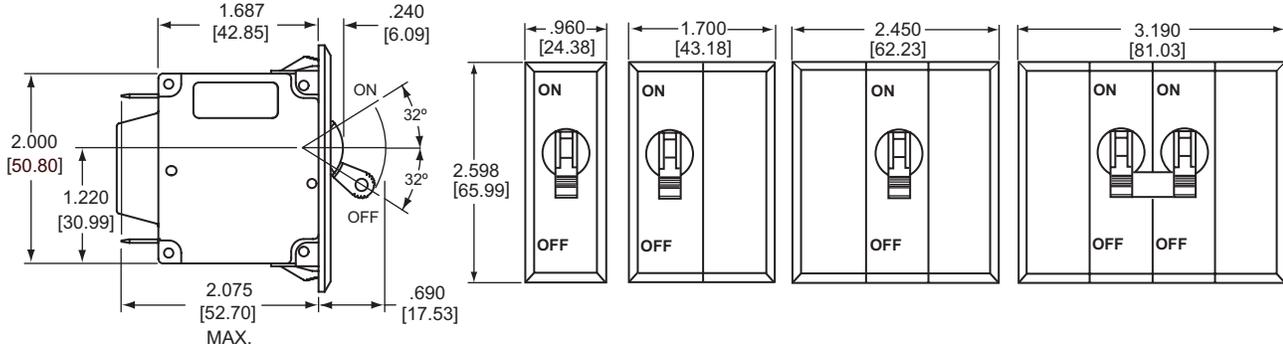

### Panel Cutout Detail Panel Thickness: (See Table)


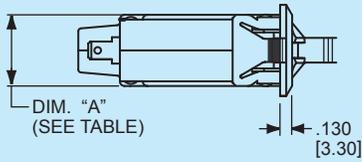


Number of Poles	Dimension "A"
1 pole	.750 max. [19.05]
2 pole	1.515 max. [38.48]
3 pole	2.265 max. [57.53]
4 pole	3.015 max. [76.58]



Number of Poles	Dimension "B"	Dimension "C"	
1 pole	.780 ± .015 [19.81 ± .381]	2.180 ± .005 [55.37 ± .13]	2.186 ± .011 [55.52 ± .28]
2 pole	1.540 ± .015 [39.12 ± .381]		
3 pole	2.290 ± .015 [58.17 ± .381]		
4 pole	3.040 ± .015 [77.22 ± .381]		
<b>Panel Thickness</b>		.040 - .059 [1.02 - 1.50]	.060 - .100 [1.52 ± 2.54]

### Optional Handle Guard

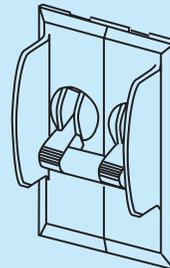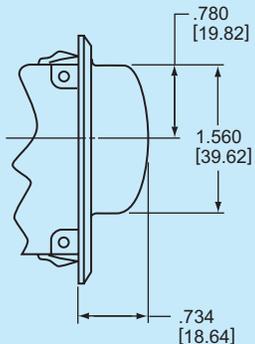

**Series Trip**

The most popular configuration for magnetic protectors is the series trip where the sensing coil and contacts are in series with the load being protected. The handle position conveniently indicates circuit status. In addition to providing conventional over-current protection, it's simultaneously used as an on-off switch.


**Shunt Trip**

The shunt trip is designed for controlling two separate loads with one assembly. The control is established by providing overload protection for the critical load. When the current through this load becomes excessive and reaches the trip point, the protector will open and remove power from both loads simultaneously. The total current rating of both loads must not exceed the maximum contact rating.

**Auxiliary Switch (Applies to Series Trip Only)**

This is furnished as an integral part of a series pole in single or multi-pole assemblies. Isolated electrically from the protector's circuit, the switch works in unison with the power contacts and provides indication at a remote location of the protector's on-off status.


Auxiliary switch contacts actuate simultaneously with the main protector contacts, and will open regardless of whether the protector contacts are opened manually or electrically. For auxiliary switch ratings below 6Vac or 5Vdc, an auxiliary switch with gold contacts designated as REG is available. Gold contacts are not recommended for load current above 100 milliamps.

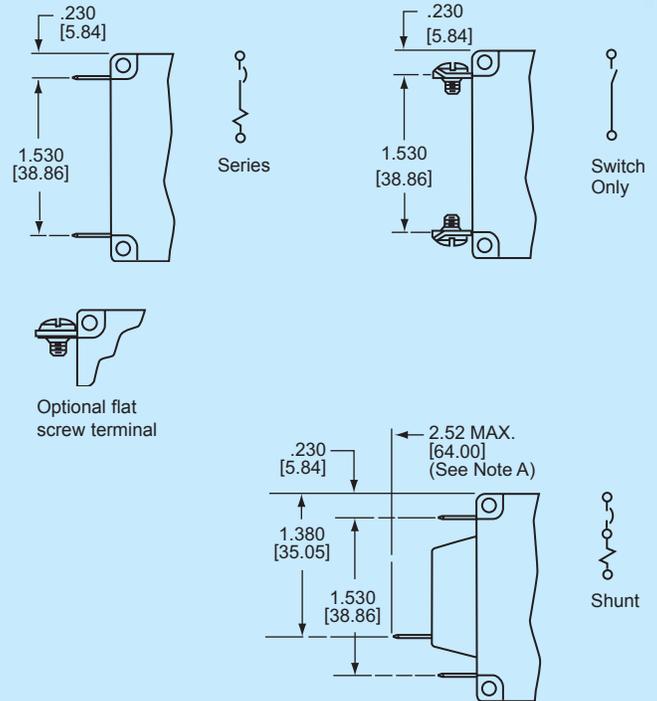




**Main Terminal Types**

Amp Rating	Push-on	8-32 Screw	M4 Screw	10-32 Screw	M5 Screw
0.05 - 30A	X	X	X		
30.1 - 50A				X	X


**Standard Auxiliary Switch**

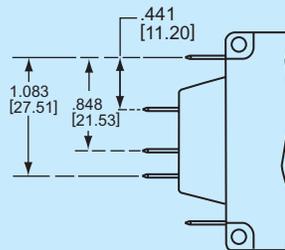

**VDE Auxiliary Switch**

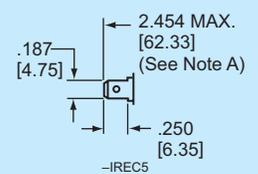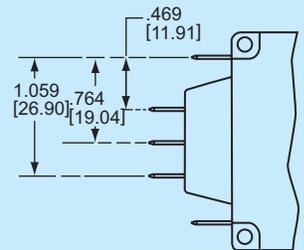

**Series with Auxiliary Switch**




**Note:**

**A:** Terminal protrusion dimensions are referenced from back mounting panel.

**B:** Main terminals are male push-on type .250 [6.35] wide x 0.31 [.79] thick x .375 [9.53] long or 8-32 x .187 [4.75] screw type. Metric screw terminals are M4 x 5mm (<=30A); M5 x 5mm screw type (>30A). On VDE approved builds with screw terminals, external tooth lockwashers are supplied. On VDE approved builds with push-on terminals a soldered connection is required above 25 amperes.



**Relay Trip**

This permits the overload sensing coil to be placed in a circuit which is electrically isolated from the trip contacts. The coil may be actuated by sensors monitoring pressure, flow, temperature, speed, etc. Other typical applications include crowbar, interlock and emergency /rapid shutdown circuitry. Trip may be accomplished by voltage or current, which must be removed after trip.

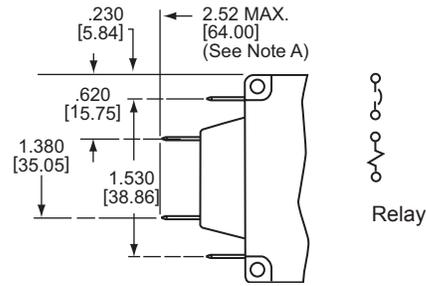


**Dual Coil**

By combining two electrically independent coils on a common magnetic circuit, it is possible to provide contact opening when either an over-current or trip voltage is applied to the respective coils. One coil will be a current trip coil with standard specifications. The second, or dual coil, can be used to provide a control function permitting contact opening from a remote interlock or other transducer functions. Standard coils are 6, 12, 24, 48, 120 and 240 volts. Tripping is instantaneous and must be removed (usually self-interrupting) after trip.

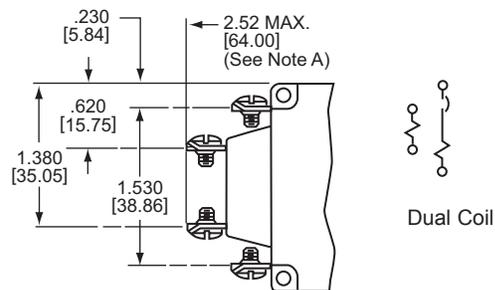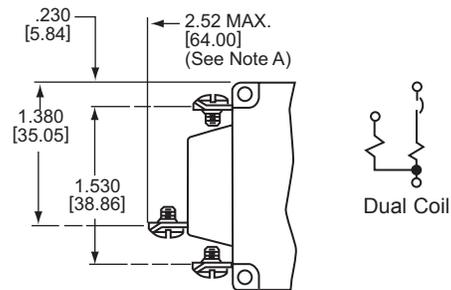

**Voltage Trip**

Sometimes called “dump circuits” or “panic trip circuits,” these units make it possible to open main power contacts with lower power inputs from one or more sources. This configuration is becoming increasingly more important for sensitive circuitry and denser packaging in automation systems. Available in series, shunt or relay configurations.

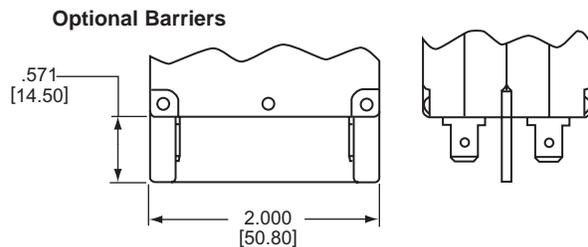

**Note:** Tolerance ± .015 [.38] unless noted. Dimensions in brackets [ ] are millimeters.

Delay	Peak Tolerance
61, 62, 63 (.050-50 amp.)	12 times (approx.) rated current
61F, 62F, 63F (.050-25 amp.)	20 times rated current
61F, 62F, 63F (25.1-50 amp.)	18 times rated current

**Inrush Pulse Tolerance**

The following table provides a comparison of inrush pulse tolerance with and without the inertial delay feature for each of the 50/60Hz delays. Pulse tolerance is defined as a single pulse of half sine wave peak current amplitude of 8 milliseconds duration that will not trip the circuit protector. The table at left provides a guide to determine if the inertia delay feature is required. Consult factory for further assistance.

**Typical Breaker Resistance/Impedance Chart**

Current ratings in amperes	DC Resisitance - Ohms	50/60Hz Impedance - Ohms	400Hz* Impedance - Ohms
	51, 52, 53, 59	61, 62, 63, 69	41, 42, 43, 49
.200	36.6	34.2	74.2
1.0	1.38	1.47	2.85
2.0	.31	.25	.64
5.0	.053	.051	.100
10.0	.016	.013	.027
20.0	.006	.005	.008
30.0	.0027	.0026	.004
50.0	.0019	.0018	

**Notes:** DCR and Impedance based on 100% rated current applied and stabilized for a minimum of one hour.  
 Tolerance .05-2.5 amperes ± 20%; 2.6 -20 amperes ± 25%, 21-50 amperes ± 50%.  
 Consult factory for special values and for coil impedance of delays not shown.

**Percentage Overload vs Trip Time in Seconds**





Delay	100%	125%	150%	200%	400%	600%	800%	1000%
41	No trip	May trip	.5 - 8	.15 - 1.9	.02 - .4	.006 - .25	.004 - .1	.004 - .05
42	No trip	May trip	5 - 70	2.2 - 25	.40 - 5	.012 - 2	.006 - .2	.006 - .15
43	No trip	May trip	35 - 350	12 - 120	1.5 - 20	.012 - 2.2	.01 - .22	.01 - .1
49	No trip	May trip	.100 max.	.050 max.	.020 max.	.020 max.	.020 max.	.020 max.
51*	No trip	.5-6.5	.3 - 3	.1 - 1.2	.031 - .5	.011 - .25	.004 - .1	.004 - .08
52*	No trip	2-60	1.8 - 30	1 - 10	.15 - 2	.04 - 1	.008 - .5	.006 - .1
53*	No trip	80-700	40 - 400	15 - 150	2 - 20	.23 - 9	.018 - .55	.012 - .2
59*	No trip	.120 max.	.100 max.	.050 max.	.022 max.	.017 max.	.017 max.	.017 max.
61*	No trip	.7-12	.35 - 7	.130 - 3	.030 - 1	.015 - .3	.01 - .15	.008 - .1
62*	No trip	10-120	6 - 60	2 - 20	.2 - 3	.02 - 2	.015 - .8	.01 - .25
63*	No trip	50-700	30 - 400	10 - 150	1.5 - 20	.4 - 10	.013 - .85	.013 - .5
69*	No trip	.120 max.	.100 max.	.050 max.	.022 max.	.017 max.	.017 max.	.017 max.
71**	No trip	.44-10	.3 - 7	.1 - 3	.03 - 1	.012 - .3	.004 - .15	.004 - .1
72**	No trip	1.8-100	1.7 - 60	1 - 20	.15 - 3	.04 - 2	.008 - .79	.006 - .28
73**	No trip	50-600	30 - 400	10 - 150	1.8 - 20	.22 - 10	.018 - .88	.011 - .5
79**	No trip	.120 max.	.100 max.	.050 max.	.023 max.	.016 max.	.015 max.	.015 max.

\*CEG type units are available only with 51, 52, 53 and 59 delays LEG type units are available only with 61, 62, 63 and 69 delays  
 \*\*135% minimum trip point for delays 71, 72, 73 and 79





# IAG/IUG/IEG/CEG/LEG DELAY CURVES

## 400Hz, DC, 50/60Hz Delay Curves (typ)

A choice of delays is offered for DC, 50/60Hz and 400Hz applications. Delays 49, 59 and 69 provide fast acting, instantaneous trip and are often used to protect sensitive electronic equipment (not recommended where known inrush exists). Delays 41, 51 and 61 have a short delay for general purpose applications. Delays 42, 52 and 62 are long enough to start certain types of motors and most transformer and capacitor loads. Delays 43, 53 and 63 are long delays for special motor applications at 400Hz, DC and 60Hz. CEG type units are only available in 51, 52, 53 and 59 delay curves. LEG type units are only available in 61, 62, 63 and 69 delay curves.

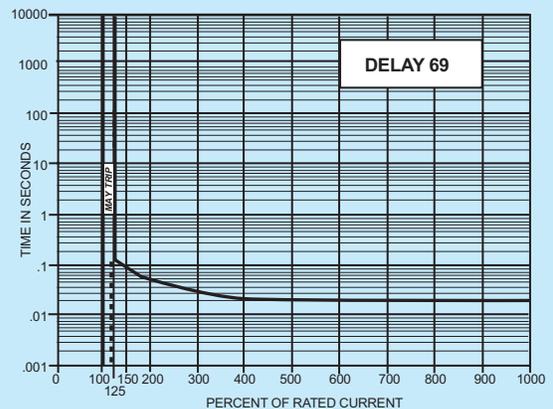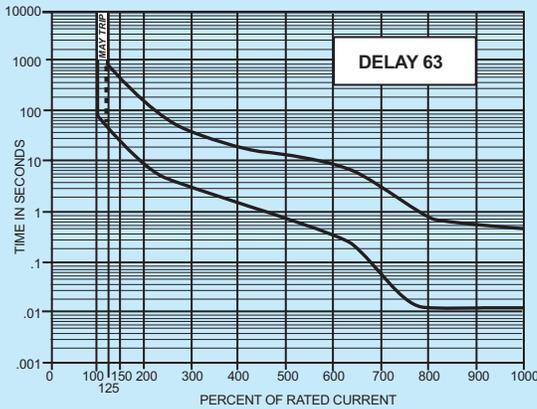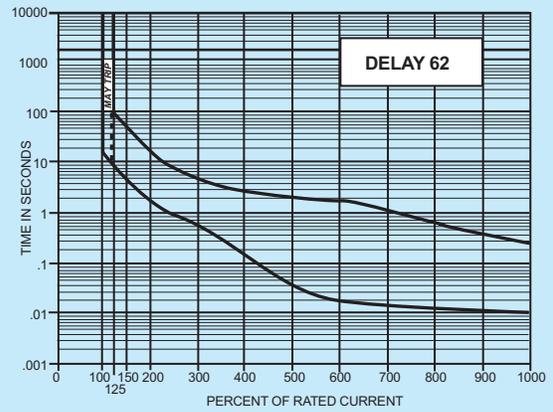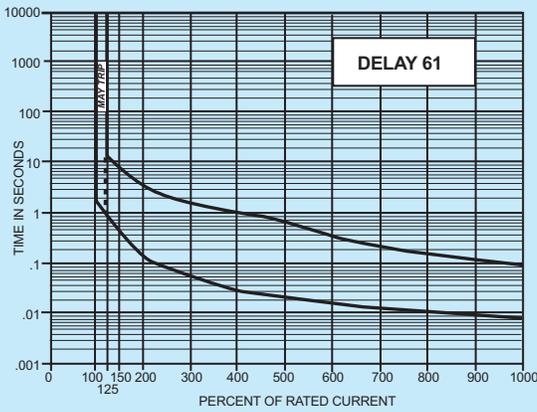

DC Delay Curves (typ)

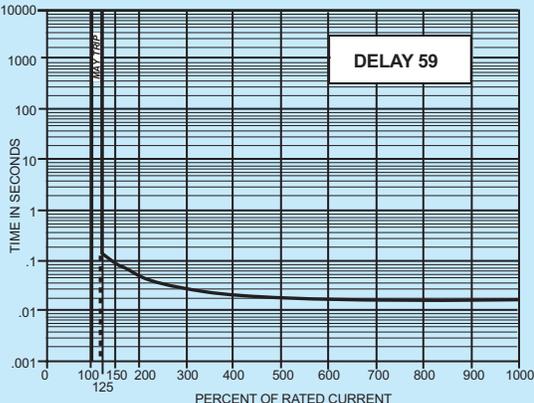
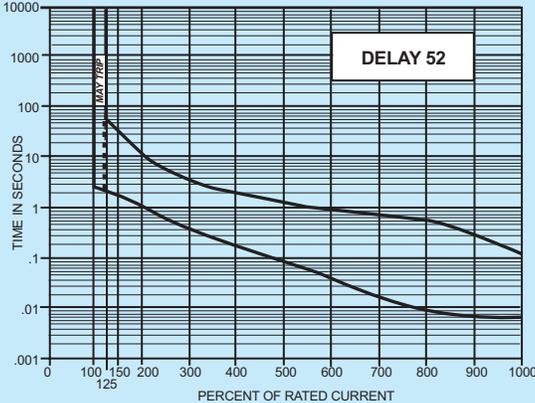
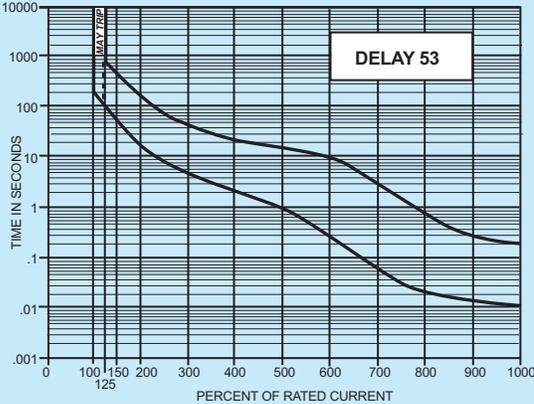
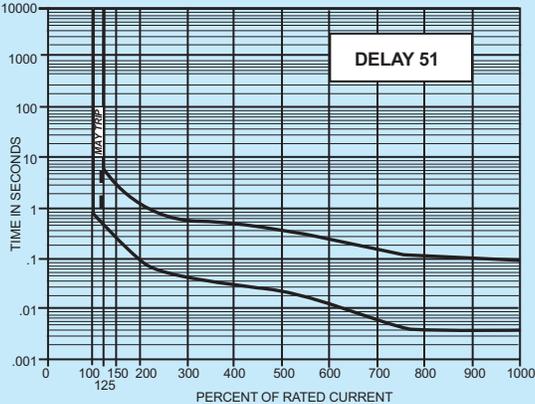


IAG/IUG/IEG/CEG/LEG





# IAG/IUG/IEG DELAY CURVES

DC/50/60Hz Delay Curves (typ)  
(Multi-frequency)

IAG/IUG/IEG/CEG/LEG

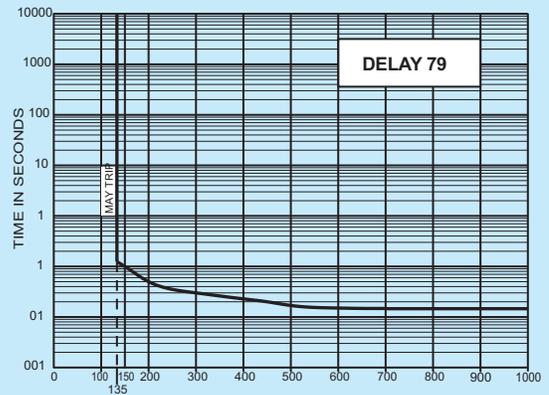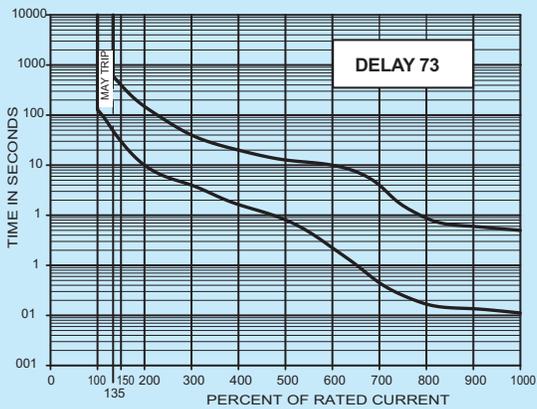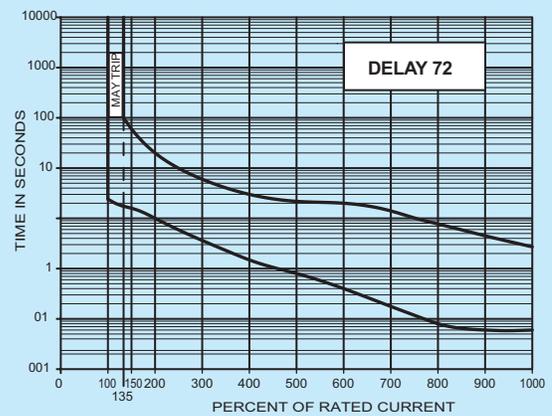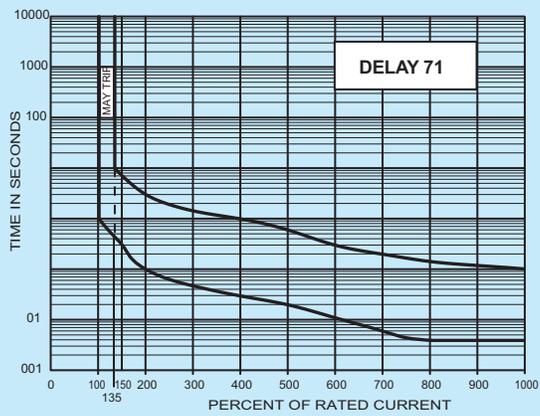

400Hz Delay Curves (typ)

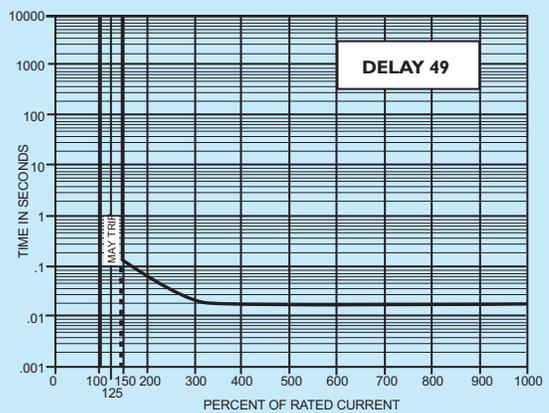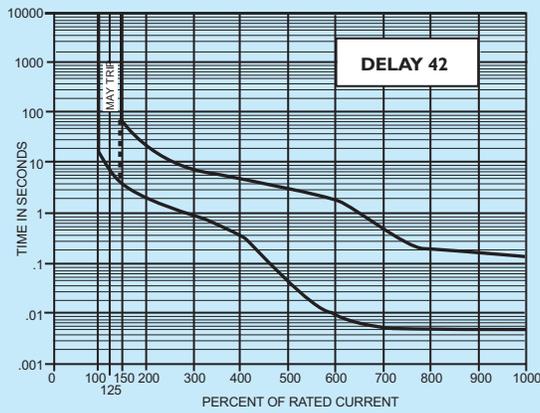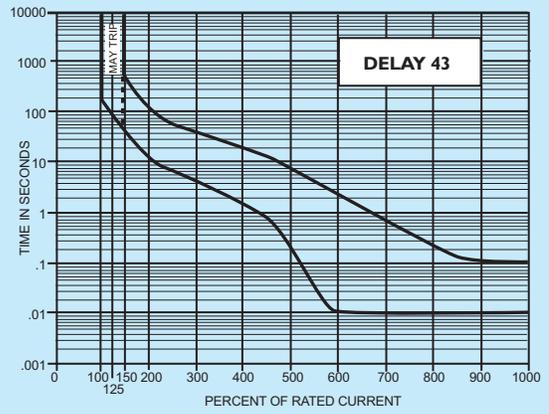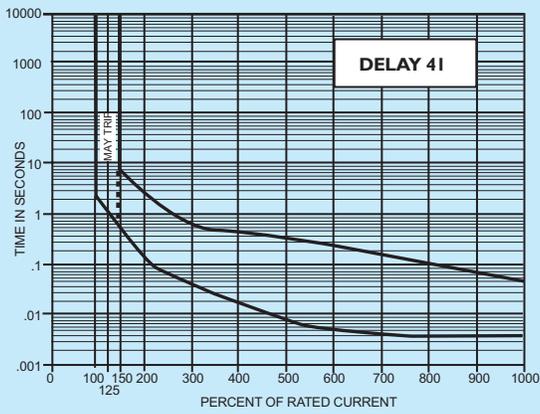

IAG/IUG/IEG/LEG

## Trip Free

Will trip open on overload, even when forcibly held in the ON position. This prevents the operator from damaging the circuit by holding on the protector.

## Trip Indication

The operating handle moves positively to the OFF position on overload.

## Ambient Operation

IAG/IUG/IEG/CEG/LEG protectors operate in temperatures between -40° C to +85° C.

## Insulation Resistance

Not less than 100 megohms at 500 volts DC.

## Dielectric Strength

IAG/IUG/IEG/CEG/LEG protectors withstand 3750Vac, 60Hz for 60 seconds between all electrically isolated terminals, except auxiliary switch terminals shall withstand 600Vac, 60Hz for REG and REC types. Four terminal dual coil and relay construction (not offered in the IEG) will withstand 1500Vac.

## Endurance

Operating as a switch, the operating life exceeds 10,000 operations at a rate of 6 per minute when tested as follows: 6000 OPS @ rated current plus 4000 OPS @ at no load.

## Electrical Characteristics

.050-50 amperes; 80Vdc Max., 240Vac Max., 50/60Hz and .050-30 amperes; 250Vac Max., 400Hz.

Units above 30 amps are not suitable for across-the-line motor starting.

## Auxiliary Switch

When supplied shall be SPDT configuration. Non VDE approved switches have a maximum UL rating of 10.0 amperes, 250 volts, 60Hz; 3.0 amperes, 50 volts DC, 1 amperes, 80 volts DC (REC) type or 0.1 amperes, 125 volts, 60Hz. (REG type).

VDE approved switches have a maximum UL rating of 10.0 amperes, 250 volts, 60Hz, 1 amperes, 80 volts DC (REG type); or 0.1 amperes, 125 volts, 60Hz (REG type); or 0.1 amperes, 125 volts, 60Hz (REG type).

## Moisture Resistance

Meets all the requirements of MIL-PRF-55629 when tested in accordance with Method 106 of MIL-STD-202.

## Salt Spray (Corrosion)

Meets the requirements of MIL-PRF-55629 when tested in accordance with Method 101 of MIL-STD-202.

## Shock

Circuit protectors shall not trip when tested per MIL-STD-202, Method 213, Test Condition I with 100% rated current applied to delayed units, except 90% current in plane 4 (i.e., handle down). Instantaneous units shall have 80% rated current applied in all planes.

## Vibration

Circuit protector shall not trip when vibrated per MIL-STD-202, Method 204, Test Condition A with 100% rated current applied to delayed units and 80% rated current to instantaneous units.

## Construction

Series, shunt, relay and series with auxiliary switch available in various delays and combinations.

## VDE Approval

IEG is VDE approved under VDE 0642 (EN60934). The IEG has 8mm creepage and clearance between the main circuit and the following areas:

- A. Operator accessible area around the handle.
- B. The mounting inserts or brackets.
- C. The auxiliary switch circuit.
- D. Between poles.

Care must be taken to maintain spacings at the terminals when wired. The VDE approval for standard terminals is not for use with bare wire. A crimp type lug is required.

In addition, all VDE approved units will be in compliance with specific CE Directives. These units will be marked as CE Compliant.

## UL1500 (Marine Ignition Protected)

IDG/IDGH is approved for Marine Ignition Protection rated at 65Vdc or 125/250Vac to 30 amperes with 1000 amperes maximum interrupt capacity or 32Vdc with 3000 amperes maximum interrupt capacity.

## UL489A Listed

The CEG is dimensionally the same as the popular IEG, but provides UL listing to UL489A. Available in one to three poles, in series, series with auxiliary switch, shunt, dual coil and voltage trip configurations. As a circuit breaker, the CEG provides communication equipment manufacturers with a UL listed circuit breaker in a very compact package that meets the stringent environmental requirements of today's marketplace. This makes the CEG ideal for switching, transmission and wireless applications.

## UL489 Listed

The LEG is dimensionally the same as the popular IEG, but provides UL listing to UL489. Available with one or two poles, in series, series with auxiliary switch, shunt and three-terminal dual coil configurations. As a circuit breaker, the LEG provides equipment manufacturers with a UL listed magnetic hydraulic circuit breaker in the most compact package available on the market.

Agency Approvals

Voltage (V)				Rated Current (A) Minimum/Maximum		Interrupting Capacity, Amps	
<b>IAG/IUG/IEG</b>							
Max Rating (V)	Frequency (Hz)	Phase	Minimum Poles	UL/CSA	VDE	UL1077 & CSA	VDE
80	DC	-	1	.05-50	.10-30	7500	4000
125	50/60	1	1	.05-50	-	3000	-
125/250	50/60	1	2	.05-50	-	3000	-
240	50/60	1 & 3	1	.05-50	-	2000	-
240	50/60	1 & 3	1	.05-50	-	5000 (1)	-
250	50/60	1 & 3	1	.05-30	.10-50	2000	2000
250	50/60	1 & 3	1	.05-30	-	5000 (2)	-
277	50/60	1	1	.05-30	-	2000	-
277	50/60	1	1	.05-30	-	5000 (2)	-
250	400	1 & 3	1	.05-30	-	1500	-
<b>IDG</b>							
Max Rating (V)	Frequency (Hz)	Phase	Minimum Poles	UL/CSA	VDE	UL 1077 & CSA	VDE
32	DC	-	1	.05-30	-	3000	-
65	DC	-	1	.05-30	-	1000	-
250	50/60	1 & 3	2	.05-30	-	1000	-
<b>CEG</b>							
Max Rating (V)	Frequency (Hz)	Phase	Minimum Poles	UL/CSA	VDE	UL 489A	VDE
80	DC	-	1	.05-50	-	5000	-
<b>LEG</b>							
Max Rating (V)	Frequency (Hz)	Phase	Minimum Poles	UL/CSA	VDE	UL 489	VDE
125	50/60	1	1	.05-30	.10-30	5000	2000
120/240	50/60	1	2	1-30	.10-30	5000	2000
<b>Note:</b> (1) With 125A max. series fuse (2) With 80A max. series fuse							

IAG/IUG/IEG/CEG/LEG

**Poles**

One through six poles available.

Approximate Weight Per Pole	
Ounces	Grams
2.2	62.4

Recommended Torque Specifications	
6-32 mounting inserts	6-8 inch pounds
M3 mounting inserts	4-5 inch pounds
8-32 screw terminals	10-12 inch pounds
M4 screw terminals	10-12 inch pounds
10-32 screw terminals	14-15 inch pounds
M5 screw terminals	14-15 inch pounds
<b>Note:</b> Where applicable, mechanical support must be provided to terminals when applying torque.	

## How to Order

The ordering code for IAG/IUG/IEG/CEG/IDG circuit protectors may be determined by following the decision steps in the tables shown here.

The coding given permits a self-assigning part number but with certain limitations. Special applications may require a factory-assigned part number. Typical examples are units with mixed ratings, combinations of styles, or constructions not listed in the third decision table. With these, it is suggested that order entry be by description and/or drawings and a part number will be established. Additionally, it is standard policy to establish a factory-assigned part number whenever a descriptive drawing exists to provide cross reference, traceability and manufacturing control.

When specifying a circuit protector for AC motor start or high inrush applications, the peak amplitude and surge duration should be specified for factory assistance in rating selection.

For example, the following is the code for a single pole, IEG quick-connect type terminal, series unit with auxiliary switch, designed for operation in a 50/60Hz circuit. It has a short time delay, a rating of 20 amperes, a black marked handle and is VDE approved.

To determine the ordering number for your particular IAG/IUG/IEG/CEG unit, simply follow the steps shown. You may use this number to place an order or as a reference for further questions you may have.

### Notes:

- A. It is recommended that power leads be soldered to circuit protectors having push-on type terminals for current trip ratings above 20 amperes.
- B. When "A" (metric thread mounting) is specified in the sixth decision in combination with screw terminal option in the second decision, metric screw terminals are supplied.
- C. IEG, IEGH, IEGS, IEGHS, IEGX and IEGZX circuit protectors are designed to meet 8mm creepage and clearance requirements for installation Category III, Pollution Degree 3, Case A as measured in IEC 664. Intended for use in equipment designed to comply with IEC 601 and 950 and VDE 0804 and 0805.

**1 First Decision**  
 Select Type and Terminal

Type	Description	Handle and Mounting Options
IAG IUG* IEG** CUG+ CEG++	One toggle handle per unit	Standard toggle/mounting, no designation required
IAGH IUGH* IEGH** CUGH+ CEGH++	One toggle handle per pole	S Toggle w/ snap-in mounting X Rocker w/ standard mounting* ZX ZX Rocker w/ integral mounting* BX BX Rocker w/ integral mounting N Sealed toggle w/bushing mounting**
IDG***	One toggle handle per unit, marine ignition protection	
IDGH***	One toggle handle per pole, marine ignition protection	
IMG** CMG++	One toggle handle per unit mid-trip indication	
IMGH** CMGH++	One toggle handle per pole mid-trip indication	

\*UL Recognized, CSA Certified  
 \*\*UL Recognized, CSA Certified, VDE Approved  
 \*\*\* UL Recognized UL1500  
 + UL489A Listed CSA Certified  
 ++ UL489A Listed CSA Certified VDE Approved

Note: Add "F" for flat screw terminals  
 \* Not available on mid-trip units  
 \*\* Available only on IAG, IUG units

**2 Second Decision**  
 Poles and Terminals

Push-on Terminals	Screw Terminals	
1	6	Single pole
11	66	Two pole
111	666	Three pole
1111	6666	Four pole

\*Not available in toggle seal handle type.

Example:  
**IEG 1 - 1REC4 - 61 - 20.0 - 01 - V**

1

2

3

4

5

7

**3 Third Decision**  
 Internal Configuration

-0	Switch only
-1	Series
-1REC4	Series w/ auxiliary switch * .110 quick connect
-1REC5	Series w/ auxiliary switch * .187 quick connect
-1REG4	Series w/ auxiliary switch (gold contacts)* .110 quick connect
-1RS4	Series w/ alarm switch, electrical trip, .110 Q.C. terminals
-1RLS4	Series w/ alarm switch, electrical trip, .110 Q.C. terminals (mid-trip only)
-3	Shunt
-4	Relay

\* Only one auxiliary switch is normally supplied on two or three pole units. Switch is located in the right-hand pole (viewed from terminal end) unless otherwise specified.

**4 Fourth Decision**  
 Frequency and Delay

SW	Switch only
-41	400Hz short delay
-42	400Hz long delay
-43	400Hz motor start
-49	400Hz 150% instant trip
-51	DC short delay*
-52	DC long delay*
-53	DC motor start*
-59	DC 125% instant trip*
-61	50/60Hz short delay
-62	50/60Hz long delay
-63	50/60Hz motor start
-69	50/60Hz 125% instant trip
-71	DC/60Hz short delay
-72	DC/60Hz long delay
-73	DC/60Hz motor start
-79	DC/60 Hz 135% instant trip

For addition of inertial delay, add an "F" to any delay numeral.  
 \* CEG types are only available with DC ratings






**C = CCC Approved**  
  
 This approval requires the addition of a C at the end of the part number. The unit will not be VDE Approved.

**V = VDE and CCC Approved**  
  
 The shaded areas denote VDE and CCC (if applicable) Approval options. This approval requires the addition of a V at the end of the part number. The V will be added to any part number formed entirely from shaded decisions. If non-shaded areas are selected, the unit will not be VDE or CCC Approved, but other approvals still apply.

IAG/IUG/IEG/CEG/LEG

5 Fifth Decision	
Rated Current	
Standard ratings listed. For other ratings, please contact the factory.	
.100	10.0
.250	15.0
.500	20.0
.750	30.0
1.00	35.0*
2.50	40.0*
5.00	50.0*
7.50	
* IDG/IDGH is rated for 30 amps max.	

6 Sixth Decision	
Optional	
	Standard hardware. No designation required.
-A	Metric thread mounting inserts and terminals
-B	Barriers*
-C	277V (50/60Hz only) (See note 3)
-G	Handle guard, (available in ZX, BX and snap-in versions only)
-L	Handle lock
-M	Handle in opposite pole
-S	Face plate sides flush with breaker(see pg. 89)
-X	Handle guard with no actuation feature (BX rocker only)
Notes: 1. One or more descriptions may be used as required. 2. When this is not used, table one may be substituted and U.S. thread will be supplied. Unit will be rated at 250V (50/60Hz only.) 3. IEGS standard face plate has beveled sides(see pg.90) * Not available on snap-in units	

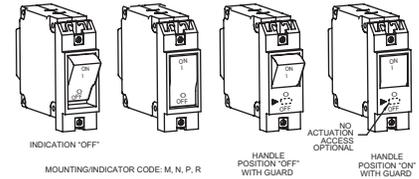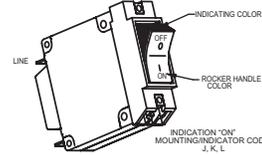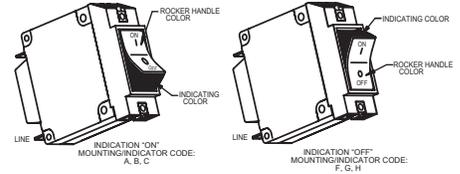

7 Seventh Decision		
Handle Color and Marking Selection		
Toggle Handle		
Color	Unmarked	Marked ON-OFF I-O
Black	-00	-01 (STD)
Yellow	-10	-11
Red	-20	-21
Blue	-30	-31
Green	-40	-41
Orange	-60	-61
White	-90	-91
Handle marking color is white on black, red, blue & green handles and black on white, yellow and orange handles. See alternate 7th decision below for X, ZX & BZ rocker handles.		

7 Seventh Decision											
Rocker Handle Color, Indicator Color and Marking Selection (See Notes)											
IAGX, IUGX, IEGX, IAGZX, IUGZX, IEGZX, CUGZX, CEGZX Rocker Handle (Single Rocker Color)											
Rocker Handle Color	Indicating Color	Marking Color	Indicates:	Unmarked	Vertical Mounting			Horizontal Mounting			Marking Detail
					On-Off Fig.1	I-O Fig.2	On-Off I-O Fig.3	On-Off Fig.4	I-O Fig.5	On-Off I-O Fig.6	
Black	N/A	White	N/A	-00	-01	-02	-03	-04	-05	-06	A
Red	N/A	White	N/A	-20	-21	-22	-23	-24	-25	-26	
Grey	N/A	Black	N/A	-40	-41	-42	-43	-44	-45	-46	
Orange	N/A	Black	N/A	-50	-51	-52	-53	-54	-55	-56	
White	N/A	Black	N/A	-90	-91	-92	-93	-94	-95	-96	
IAGZX, IUGZX, IEGZX, CUGZX, CEGZX Rocker Handle (Dual Rocker Color)											
Black	White	White	On	-A0	-A1	-A2	-A3	-A4	-A5	-A6	A
Black	Red	White	On	-B0	-B1	-B2	-B3	-B4	-B5	-B6	
Black	Green	White	On	-C0	-C1	-C2	-C3	-C4	-C5	-C6	
Black	White	White	Off	-F0	-F1	-F2	-F3	-F4	-F5	-F6	
Black	Red	White	Off	-G0	-G1	-G2	-G3	-G4	-G5	-G6	
Black	Green	White	Off	-H0	-H1	-H2	-H3	-H4	-H5	-H6	
Black	White	White	On	-J0	-J1	-J2	-J3	-J4	-J5	-J6	B
Black	Red	White	On	-K0	-K1	-K2	-K3	-K4	-K5	-K6	
Black	Green	White	On	-L0	-L1	-L2	-L3	-L4	-L5	-L6	
IAGBX, IUGBX, IEGBX, CUGBX, CEGBX Rocker Handle (Dual Rocker Color)											
Black	White	White	Off	-M0	N/A	-M2	-M3	N/A	N/A	-M6	C
Black	Red	Red	Off	-N0	N/A	-N2	-N3	N/A	N/A	-N6	
Black	Green	Green	Off	-P0	N/A	-P2	-P3	N/A	N/A	-P6	
Black	Yellow	Yellow	Off	-R0	N/A	-R2	-R3	N/A	N/A	-R6	
Notes: A. Bezels of IAGBX, IUGBX, IEGBX, CUGBX, CEGBX are black. B. Consult factory for other marking options.											

# LEG DECISION TABLES

## How to Order

The ordering code for LEG circuit breakers may be determined by following the decision steps in the tables shown here.

The coding given permits a self-assigning part number but with certain limitations. Special applications may require a factory-assigned part number. Typical examples are units with mixed ratings, combinations of styles, or constructions not listed in the third decision table. With these, it is suggested that order entry be by description and/or drawings and a part number will be established. Additionally, it is standard policy to establish a factory-assigned part number whenever a descriptive drawing exists to provide cross reference, traceability and manufacturing control.

When specifying a circuit breaker for AC motor start or high inrush applications, the peak amplitude and surge duration should be specified for factory assistance in rating selection.

For example, the following is the code for a single pole, LEG screw type terminal, series unit with auxiliary switch, designed for operation in a 50/60Hz circuit. It has a short time delay, a rating of 20 amperes, a black marked handle and is VDE approved.


To determine the ordering number for your particular LEG unit, simply follow the steps shown. You may use this number to place an order or as a reference for further questions you may have.

1 First Decision		
Select Type and Terminal		
Type	Description	Handle and Mounting Options
LEG	One toggle handle per unit	Standard toggle/mounting, no designation required
LMG	One toggle handle per unit mid-trip indication	S Toggle w/ snap-in mounting
LEGH	One toggle handle per pole	ZX ZX Rocker w/ integral mounting*
LMGH	One toggle handle per pole mid-trip indication	BX BX Rocker w/ integral mounting
Note: All types are UL489 listed, CUL certified		Note: Add "F" for flat screw terminals * Not available on mid-trip units

2 Second Decision	
Poles and Terminals	
Screw Terminals	
6	Single pole
66	Two pole*
*Supplied with standard barrier	

Example:

LEG 6 - 1REC4 - 61 - 20.0 - 01 - V



3 Third Decision	
Internal Configuration	
-1	Series
-1REC4	Series w/ auxiliary switch * .110 quick connect
-1REC5	Series w/ auxiliary switch * .187 quick connect
-1REG4	Series w/ auxiliary switch* (gold contacts) .110 quick connect
-1RS4	Series w/ alarm switch*, electrical trip, .110 Q.C. terminals
-1RLS4	Series w/ alarm switch*, electrical trip, mid-trip only, .110 Q.C. terminals
-3	Shunt
* Only one auxiliary switch is normally supplied on two pole units. Switch is located in the right-hand pole (viewed from terminal end) unless otherwise specified.	

4 Fourth Decision	
Frequency and Delay	
-61	50/60Hz short delay
-62	50/60Hz long delay
-63	50/60Hz motor start
-69	50/60Hz 125% instant trip
For addition of inertial delay, add an "F" to any delay numeral. * CEG types are only available with DC ratings	

V = VDE and CCC Approved

The shaded areas denote VDE and CCC (if applicable) Approval options. This approval requires the addition of a V at the end of the part number. The V will be added to any part number formed entirely from shaded decisions. If non-shaded areas are selected, the unit will not be VDE or CCC Approved, but other approvals still apply.

C = CCC Approved

This approval requires the addition of a C at the end of the part number. The unit will not be VDE Approved.



### Notes:

- A. When "A" (metric thread mounting) is specified in the sixth decision in combination with screw terminal option in the second decision, metric screw terminals are supplied.
- B. LEG, LEGH, LEGS, LEGHS, LEGZX and LEGBX circuit breakers are designed to meet 8mm creepage and clearance requirements for installation Category III, Pollution Degree 3, Case A as measured in IEC 664. Intended for use in equipment designed to comply with IEC 601 and 950 and VDE 0804 and 0805.



5 Fifth Decision	
Rated Current	
Standard ratings listed. For other ratings, please contact the factory.	
.100	10.0
.250	15.0
.500	20.0
.750	30.0
1.00	
2.50	
5.00	
7.50	

6 Sixth Decision	
Optional	
	Standard hardware. No designation required.
-A	Metric thread mounting inserts and terminals
-G	Handle guard, (available in ZX, BX and snap-in versions only)
-L	Handle lock
-S	Face plate sides flush with breaker
-X*	Handle guard with no actuation feature (BX rocker only)
-Z	"Z" Barriers



Notes:  
 1. One or more descriptions may be used as required.  
 2. When this is not used, table one may be substituted and U.S. thread will be supplied. Unit will be rated at 250V (50/60Hz only.)  
 3. LEGS standard face plate has beveled sides(see pg. 90)  
 \* Not available on mid-trip units

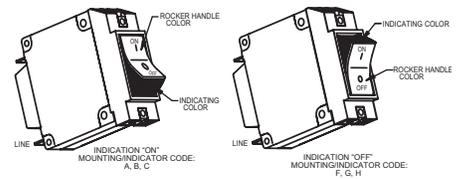

MARKING DETAIL "A" (SEE TABLE)

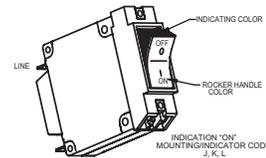

MARKING DETAIL "B" (SEE TABLE)

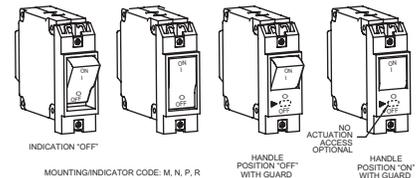

MARKING DETAIL "C" (SEE TABLE)

7 Seventh Decision		
Handle Color and Marking Selection		
Toggle Handle		
Color	Unmarked	Marked ON-OFF I-O
Black	-00	-01 (STD)
Yellow	-10	-11
Red	-20	-21
Blue	-30	-31
Green	-40	-41
Orange	-60	-61
White	-90	-91

Handle marking color is white on black, red, blue & green handles and black on white, yellow and orange handles.  
 See alternate 7th decision below for ZX & BZ rocker handles.

7 Seventh Decision											
Rocker Handle Color, Indicator Color and Marking Selection (See Note)											
LEGZX Rocker Handle (Single Rocker Color)											
Rocker Handle Color	Indicating Color	Marking Color	Indicates:	Unmarked	Vertical Mounting			Horizontal Mounting			Marking Detail
					On-Off Fig.1	I-O Fig.2	On-Off I-O Fig.3	On-Off Fig.4	I-O Fig.5	On-Off I-O Fig.6	
Black	N/A	White	N/A	-00	-01	-02	-03	-04	-05	-06	A
Red	N/A	White	N/A	-20	-21	-22	-23	-24	-25	-26	
Grey	N/A	Black	N/A	-40	-41	-42	-43	-44	-45	-46	
Orange	N/A	Black	N/A	-50	-51	-52	-53	-54	-55	-56	
White	N/A	Black	N/A	-90	-91	-92	-93	-94	-95	-96	
LEGZX Rocker Handle (Dual Rocker Color)											
Black	White	White	On	-A0	-A1	-A2	-A3	-A4	-A5	-A6	A
Black	Red	White	On	-B0	-B1	-B2	-B3	-B4	-B5	-B6	
Black	Green	White	On	-C0	-C1	-C2	-C3	-C4	-C5	-C6	
Black	White	White	Off	-F0	-F1	-F2	-F3	-F4	-F5	-F6	
Black	Red	White	Off	-G0	-G1	-G2	-G3	-G4	-G5	-G6	
Black	Green	White	Off	-H0	-H1	-H2	-H3	-H4	-H5	-H6	
Black	White	White	On	-J0	-J1	-J2	-J3	-J4	-J5	-J6	B
Black	Red	White	On	-K0	-K1	-K2	-K3	-K4	-K5	-K6	
Black	Green	White	On	-L0	-L1	-L2	-L3	-L4	-L5	-L6	
LEGBX Rocker Handle (Dual Rocker Color)											
Black	White	White	Off	-M0	N/A	-M2	-M3	N/A	N/A	-M6	C
Black	Red	Red	Off	-N0	N/A	-N2	-N3	N/A	N/A	-N6	
Black	Green	Green	Off	-P0	N/A	-P2	-P3	N/A	N/A	-P6	
Black	Yellow	Yellow	Off	-R0	N/A	-R2	-R3	N/A	N/A	-R6	

Notes: A. Bezels of LEGBX are black.  
 B. Consult factory for other marking options.

