




NAIS

HIGH ELECTRICAL & MECHANICAL NOISE IMMUNITY RELAY

JQ RELAYS



mm inch

FEATURES

- High electrical noise immunity
- High switching capacity in a compact package
- High sensitivity: 200 mW (1a), 400 mW (1c)
- High surge voltage: 8,000 V between contacts and coil
- UL, CSA, VDE, TÜV, SEMKO approved
- Class B coil insulation type available

SPECIFICATIONS

Contact

			Standard type	High capacity type	
Arrangement			1 Form A, 1 Form C		
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)			100 mΩ		
Contact material			Silver alloy		
Rating (resistive)	Nominal switching capacity	1a	5 A 125 V AC 2 A 250 V AC 5 A 30 V DC	10 A 125 V AC 5 A 250 V AC 5 A 30 V DC	
		1c	N.O.	5 A 125 V AC 2 A 250 V AC 3 A 30 V AC	10 A 125 V AC 5 A 250 V AC 5 A 30 V DC
			N.C.	2 A 125 V AC 1 A 250 V AC 1 A 30 V DC	3 A 125 V AC 2 A 250 V AC 1 A 30 V DC
	Max. switching power	1a	625 VA, 150 W	1,250 VA, 150 W	
		1c	N.O.	625 VA, 90 W	1,250 V AC, 150 W
			N.C.	250 VA, 30 W	500 V AC, 30 W
	Max. switching voltage		250 V AC, 110 V DC (0.3A)		
	Max. switching current		N.O.: 5 A N.C.: 2 A	N.O.: 10 A N.C.: 3 A	

Expected electrical life (min. operations)

Type			Switching capacity	No. of operations
Standard type	1a		5 A 125 V AC	5×10 ⁴
			3 A 125 V AC	2×10 ⁵
			2 A 250 V AC	2×10 ⁵
			5 A 30 V DC	10 ⁵
	1c	N.O.	5 A 125 V AC	5×10 ⁴
			2 A 250 V AC	2×10 ⁵
1c	N.C.	3 A 30 V DC	10 ⁵	
		2 A 125 V AC	2×10 ⁵	
		1 A 250 V AC	2×10 ⁵	
		1 A 30 V DC	10 ⁵	
High capacity type	1a		10 A 125 V AC	5×10 ⁴
			5 A 250 V AC	5×10 ⁴
			5 A 30 V DC	10 ⁵
	1c	N.O.	10 A 125 V AC	5×10 ⁴
			5 A 250 V AC	5×10 ⁴
	1c	N.C.	5 A 30 V DC	10 ⁵
3 A 125 V AC			2×10 ⁵	
2 A 250 V AC			2×10 ⁵	
		1 A 30 V DC	10 ⁵	

Coil (at 20°C 68°F)

Nominal operating power	1a: 200 mW	1c: 400 mW
-------------------------	------------	------------

Characteristics

Max. operating speed		20 cpm
Initial insulation resistance* ¹		Min. 1,000 MΩ at 500 V DC
Initial breakdown voltage* ²	Between open contacts	1a: 1,000 Vrms for 1 min. 1c: 750 Vrms for 1 min.
	Between contacts and coil	4,000 Vrms for 1 min.
Surge voltage between contact and coil* ³		8,000 V
Operate time* ⁴ (at nominal voltage)		Approx. 5 ms
Release time* ⁴ (at nominal voltage)(without diode)		Approx. 2 ms
Temperature rise* ⁵		Max. 45°C
Shock resistance	Functional* ⁶	Min. 294 m/s ² {30 G}
	Destructive* ⁷	Min. 980 m/s ² {100 G}
Vibration resistance	Functional* ⁸	98 m/s ² {10 G}, 10 to 55 Hz at double amplitude of 1.6 mm
	Destructive	117.6 m/s ² {12 G}, 10 to 55 Hz at double amplitude of 2.0 mm
Conditions for operation, transport and storage* ⁹ (Not freezing and condensing at low temperature)	Ambient temp.* ¹⁰	−40°C to +85°C −40°F to +185°F
	Humidity	5 to 85% R.H.
Unit weight		Approx. 7 g .25 oz

Remarks

- * Specifications will vary with foreign standards certification ratings.
 - *¹ Measurement at same location as "Initial breakdown voltage" section
 - *² Detection current: 10 mA
 - *³ Wave is standard shock voltage of ±1.2 × 50μs according to JEC-212-1981
 - *⁴ Excluding contact bounce time
 - *⁵ Measured conditions
- | | |
|--------------------|--|
| Standard type | Resistive, nominal voltage applied to the coil.
Contact carrying current: 5 A, at 70°C 158°F |
| High capacity type | Resistive, nominal voltage applied to the coil.
Contact carrying current: 10 A, at 70°C 158°F |
- *⁶ Half-wave pulse of sine wave: 11ms; detection time: 10μs
 - *⁷ Half-wave pulse of sine wave: 6ms
 - *⁸ Detection time: 10μs
 - *⁹ Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 24).
 - *¹⁰ When using relays in a high ambient temperature, consider the pick-up voltage rise due to the high temperature (a rise of approx. 0.4% V for each 1°C 33.8°F with 20°C 68°F as a reference) and use a coil impressed voltage that is within the maximum allowable voltage range.

JQ

TYPICAL APPLICATIONS

- Air conditioners
- Refrigerators
- Microwave ovens
- Heaters

ORDERING INFORMATION

Ex. JQ 1a P — B — 12 V

Contact arrangement	Contact capacity	Coil insulation class	Coil voltage (DC)
1a: 1 Form A 1: 1 Form C	Nil: Standard P: High capacity	Nil: Class E coil insulation B: Class B coil insulation	5, 6, 9, 12, 18, 24, 48* V

UL/CSA, VDE, SEMKO approved type is standard.

* Available only for 1 Form C type


TYPES AND COIL DATA at 20°C 68°F

	Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (min.)	Drop-out voltage, V DC (min.)	Nominal operating current, mA	Nominal operating power, mW	Coil resistance, Ω ($\pm 10\%$)	Max. allowable voltage, V DC
1 Form A	Standard type	JQ1a-5V	5	3.75	0.25	40	125	180% of nominal voltage (at 20°C 68°F)
		JQ1a-6V	6	4.5	0.3	33.3	180	
		JQ1a-9V	9	6.75	0.45	22.2	405	
		JQ1a-12V	12	9	0.6	16.7	720	
		JQ1a-18V	18	13.5	0.9	11.1	1,620	
		JQ1a-24V	24	18	1.2	8.3	2,880	
	High capacity type	JQ1aP-5V	5	4	0.25	40	125	130% of nominal voltage (at 85°C 185°F)
		JQ1aP-6V	6	4.8	0.3	33.3	180	
		JQ1aP-9V	9	7.2	0.45	22.2	405	
		JQ1aP-12V	12	9.6	0.6	16.7	720	
		JQ1aP-18V	18	14.4	0.9	11.1	1,620	
		JQ1aP-24V	24	19.2	1.2	8.3	2,880	
1 Form C	Standard type	JQ1-5V	5	3.75	0.25	80	62.5	150% of nominal voltage (at 20°C 68°F)
		JQ1-6V	6	4.5	0.3	66.7	90	
		JQ1-9V	9	6.75	0.45	44.4	202.5	
		JQ1-12V	12	9	0.6	33.3	360	
		JQ1-18V	18	13.5	0.9	22.2	810	
		JQ1-24V	24	18	1.2	16.7	1,440	
		JQ1-48V	48	36	2.4	8.3	5,760	
	High capacity type	JQ1P-5V	5	4	0.25	80	62.5	110% of nominal voltage (at 85°C 185°F)
		JQ1P-6V	6	4.8	0.3	66.7	90	
		JQ1P-9V	9	7.2	0.45	44.4	202.5	
		JQ1P-12V	12	9.6	0.6	33.3	360	
		JQ1P-18V	18	14.4	0.9	22.2	810	
		JQ1P-24V	24	19.2	1.2	16.7	1,440	
		JQ1P-48V	48	38.4	2.4	8.3	5,760	

JQ


mm inch

DIMENSIONS

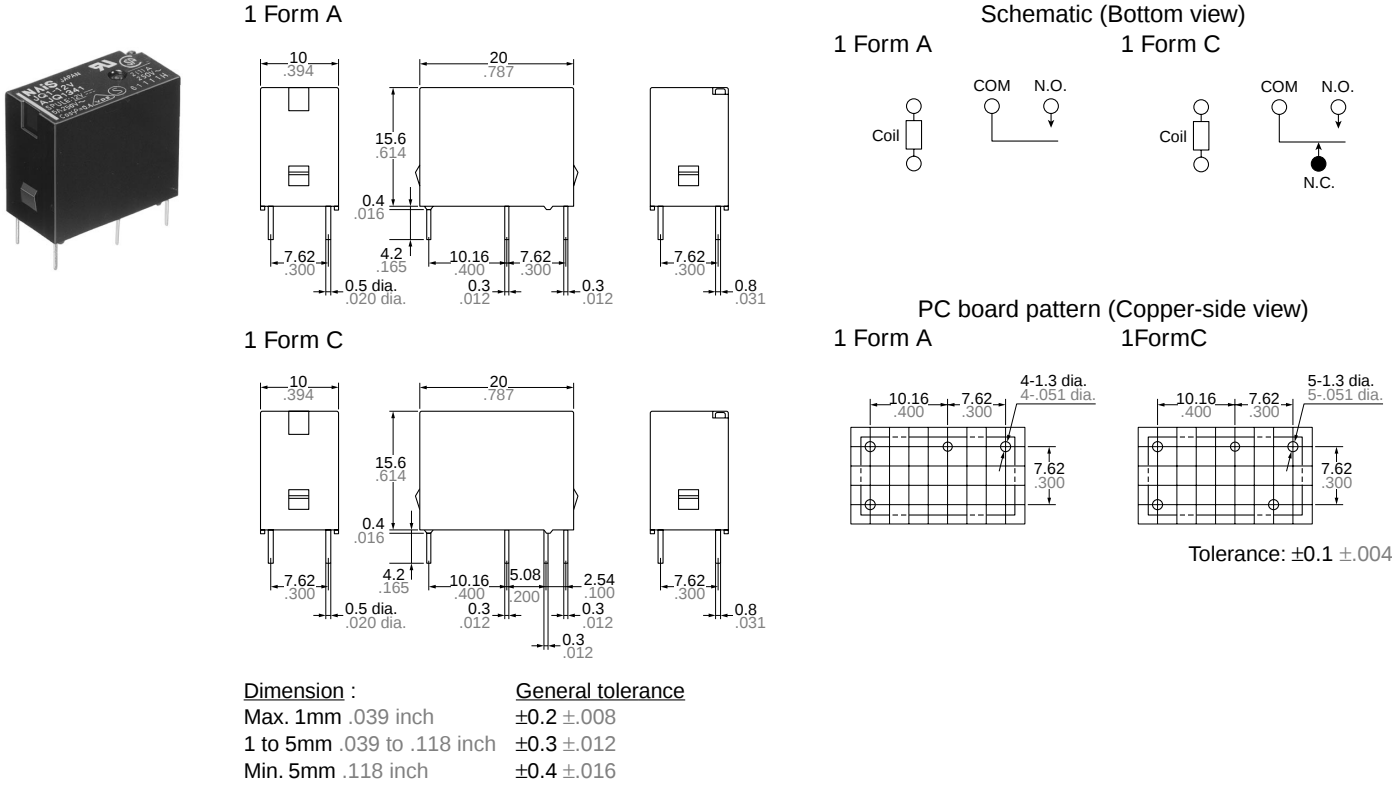


REFERENCE DATA

Max. switching capacity (1 Form A type)

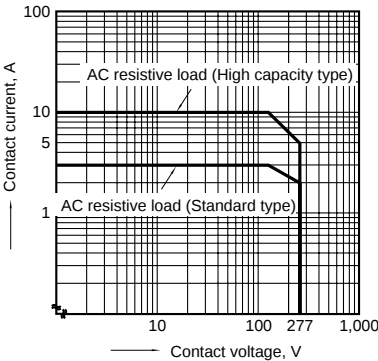


Max. switching capacity (1 Form C type)

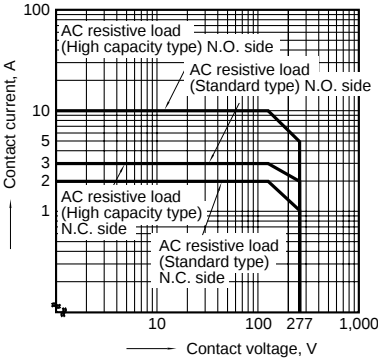

Standard type


1-(1). Operate & release time
(1 Form A type)

Tested sample: JQ1a-12V, 25 pcs.

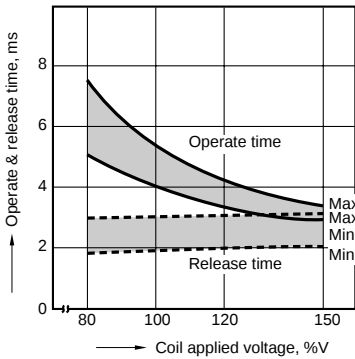


1-(2). Operate & release time
(1 Form C type)

Tested sample: JQ1-24V, 25 pcs.

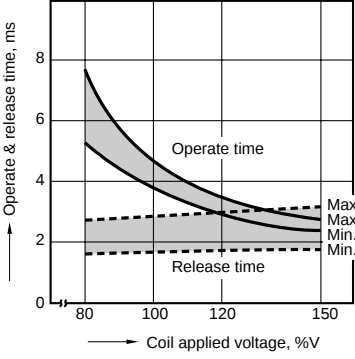

2. Life curve

Ambient temperature: room temperature

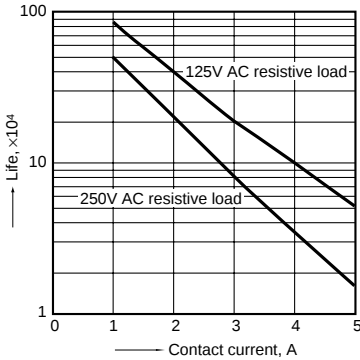


JQ

3-(1). Coil temperature rise

(1 Form A type)


Contact carrying current: 3 A, 5 A
Measured portion: Inside the coil

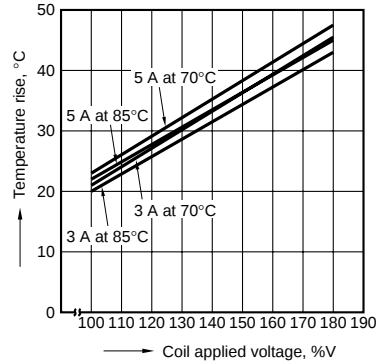

3-(2). Coil temperature rise

(1 Form C type)


Contact carrying current: 3 A, 5 A
Measured portion: Inside the coil

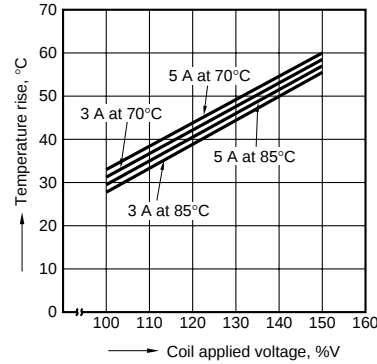

4-(1). Ambient temperature characteristics

(1 Form A type)


Tested sample: JQ1a-24V
Contact carrying current: 3 A, 5 A

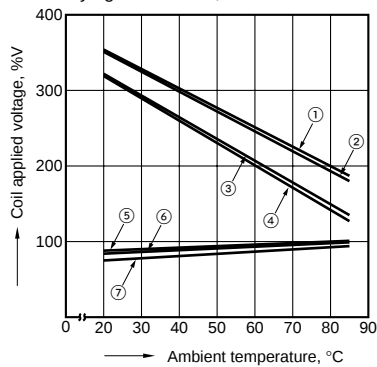

4-(2). Ambient temperature characteristics

(1 Form C type)

Tested sample: JQ1-24V
Contact carrying current: 3 A, 5 A

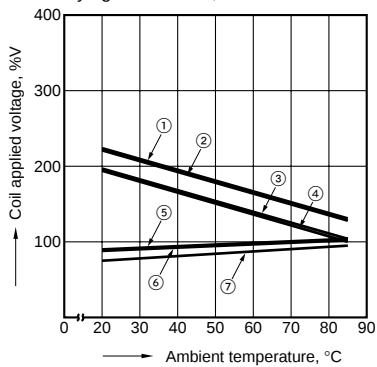


- ① Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 130°C 266°F) (Carrying current: 3 A)
- ② Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 130°C 266°F) (Carrying current: 5 A)
- ③ Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 115°C 239°F) (Carrying current: 3 A)
- ④ Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 115°C 239°F) (Carrying current: 5 A)
- ⑤ Pick-up voltage with a hot-start condition of 100%V on the coil (Carrying current: 5 A)
- ⑥ Pick-up voltage with a hot-start condition of 100%V on the coil (Carrying current: 3 A)
- ⑦ Pick-up voltage

High capacity type

1-(1). Operate & release time

(1 Form A type)


Tested sample: JQ1aP-12V, 25 pcs.

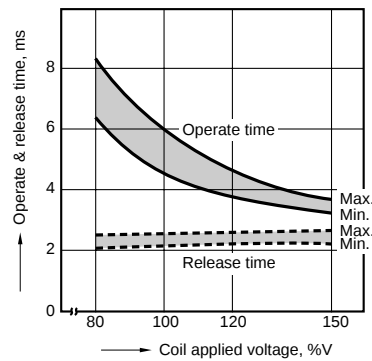

1-(2). Operate & release time


(1 Form C type)

Tested sample: JQ1P-12V, 25 pcs.

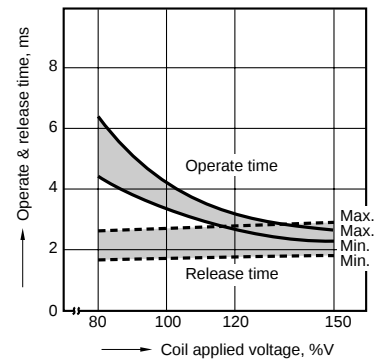

2. Life curve


Ambient temperature: room temperature

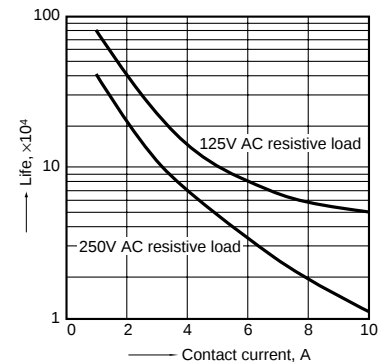

3-(1). Coil temperature rise

(1 Form A type)


Contact carrying current: 5 A, 10 A
Measured portion: Inside the coil

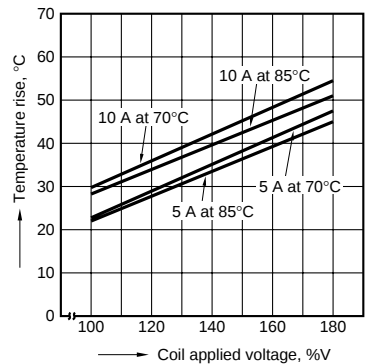

3-(2). Coil temperature rise


(1 Form C type)

Contact carrying current: 5 A, 10 A
Measured portion: Inside the coil

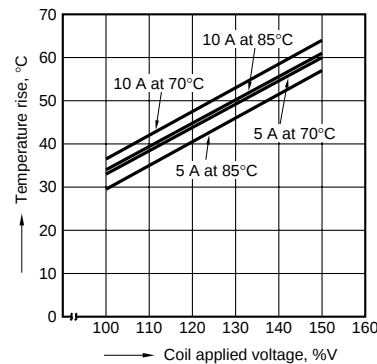


4-(1). Ambient temperature characteristics
(1 Form A type)

Tested sample: JQ1aP-24V
Contact carrying current: 5 A, 10 A

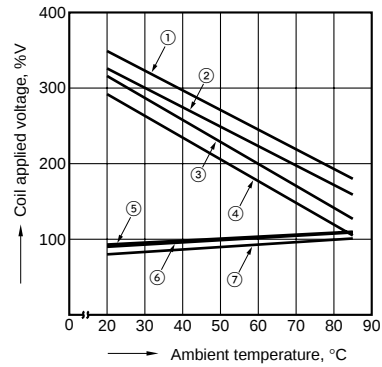

4-(2). Ambient temperature characteristics
(1 Form C type)

Tested sample: JQ1P-24V
Contact carrying current: 5 A, 10 A

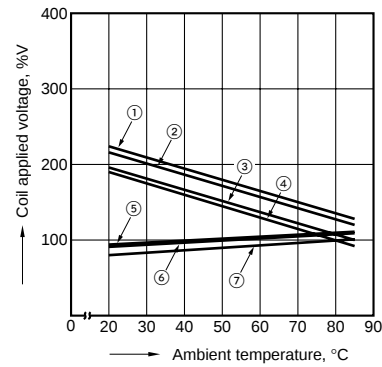

- ① Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 130°C 266°F) (Carrying current: 5 A)
- ② Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 130°C 266°F) (Carrying current: 10 A)
- ③ Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 115°C 239°F) (Carrying current: 5 A)
- ④ Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 115°C 239°F) (Carrying current: 10 A)
- ⑤ Pick-up voltage with a hot-start condition of 100%V on the coil (Carrying current: 10 A)
- ⑥ Pick-up voltage with a hot-start condition of 100%V on the coil (Carrying current: 5 A)
- ⑦ Pick-up voltage

For Cautions for Use, see Relay Technical Information (Page 11 to 39).