

Photocoupler

KODENSHI

K3610 • K3611

These Photocouplers consist of a Gallium Arsenide Infrared Emitting Diode and a Silicon NPN Phototransistor in a 6-pin package.

FEATURES


- TTL Compatible Output
- Collector-Emitter Voltage : Min.70V
- Current Transfer Ratio : Typ.50% (at $I_F=5\text{mA}$, $V_{CE}=5\text{V}$)
- Electrical Isolation Voltage : AC2500Vrms
- Without Base Connection - K3610
- With Base Connection - K3611
- UL Recognized File No. E107486

APPLICATIONS

- Interface between two circuits of different potential
- Vending Machine, Copiers
- Measuring Instrument
- Home Appliances

DIMENSION

(Unit : mm)

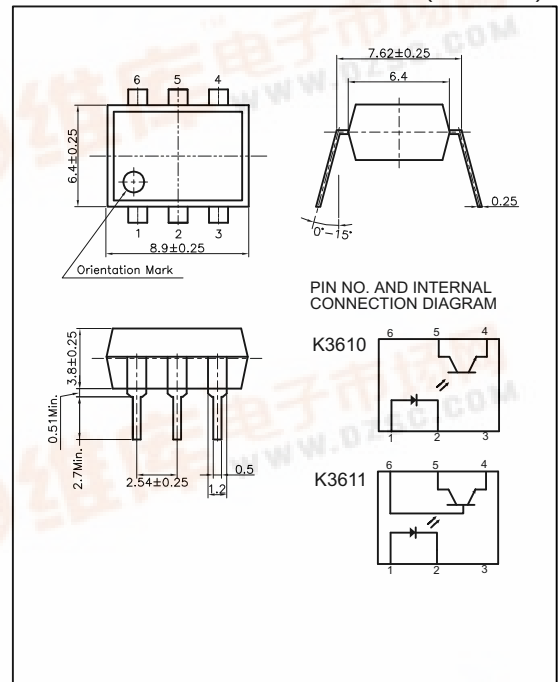

MAXIMUM RATINGS

(Ta=25)

Parameter	Symbol	Rating	Unit
Input	Forward Current	I_F	50
	Reverse Voltage	V_R	5
	Peak Forward Current ^{*1}	I_{FP}	1
	Power Dissipation	P_D	70
Output	Collector-Emitter Breakdown Voltage	BV_{CEO}	70
	Emitter-Collector Breakdown Voltage	BV_{ECO}	7
	Collector-Base Breakdown Voltage**	BV_{CBO}	80
	Collector Current	I_C	50
	Collector Power Dissipation	P_C	150
Input to Output Isolation Voltage ^{*2}		V_{iso}	AC2500
Storage Temperature		T_{stg}	-55~+125
Operating Temperature		T_{opr}	-30~+100
Lead Soldering Temperature ^{*3}		T_{sol}	260
Total Power Dissipation		P_{tot}	200

** Except for K3610

*1. Input current with 100μs pulse width, 1% duty cycle

*2. Measured at RH=40~60% for 1min

*3. 1/16 inch form case for 10sec



K3610 • K3611

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25 , unless otherwise noted)


Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit.
Input	Forward Voltage	V _F	I _F =10mA	-	1.15	1.30	V
	Reverse Current	I _R	V _R =5V	-	-	10	μA
	Capacitance	C _T	V=0, f=1MHz	-	30	-	pF
Output	Collector-Emitter Breakdown Voltage	BV _{CEO}	I _C =1mA	70	-	-	V
	Emitter-Collector Breakdown Voltage	BV _{ECO}	I _E =0.1mA	7	-	-	V
	Collector-Base Breakdown Voltage **	BV _{CBO}	I _C =1mA	80	-	-	V
	Collector Dark Current	I _{CEO}	I _F =0, V _{CE} =24V	-	-	100	nA
	Capacitance	C _{CE}	V _{CE} =0, f=1MHz	-	10	-	pF
Coupled	Current Transfer Ratio *4	CTR	I _F =5mA, V _{CE} =5V	50	-	600	%
	Collector-Emitter Saturation Voltage	V _{CE(SAT)}	I _F =5mA, I _C =1mA	-	-	0.3	V
	Input-Output Capacitance	C _{IO}	V=0, f=1MHz	-	1	-	pF
	Input-Output Isolation Resistance	R _{IO}	RH=40~60%, V=500V	-	10 ¹¹	-	Ω
	Rise Time	t _r	V _{CE} =10V, R _L =100Ω	-	3	-	μs
	Fall Time	t _f	I _C =2mA	-	3	-	μs

** Except for K3610


*4. CTR=(I_C/I_F) X 100 (%)

K3610 • K3611


Forward Current vs. Ambient Temperature




Collector Power Dissipation vs. Ambient Temperature

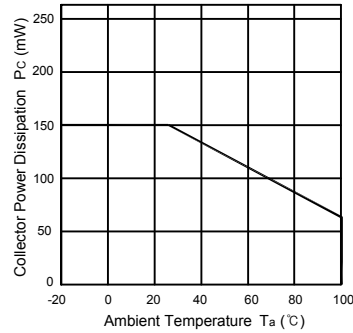


Forward Current vs. Forward Voltage

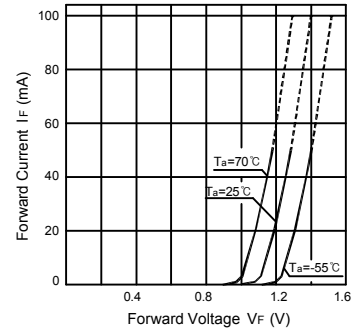


Collector Current vs. Collector-Emitter Voltage

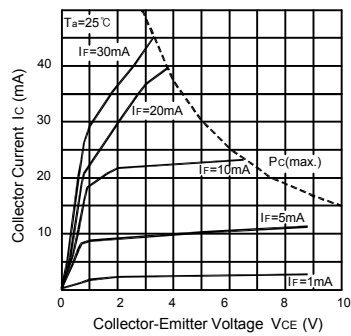


Dark Current vs. Ambient Temperature

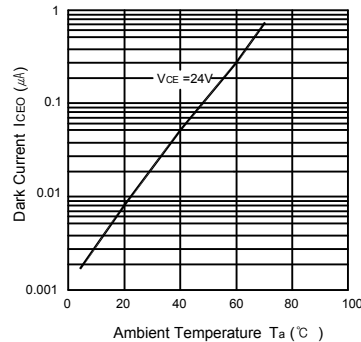


Collector Current vs. Ambient Temperature

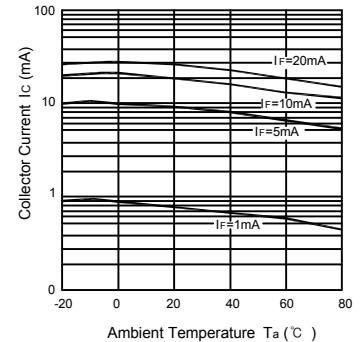

Response Time vs. Load Resistance

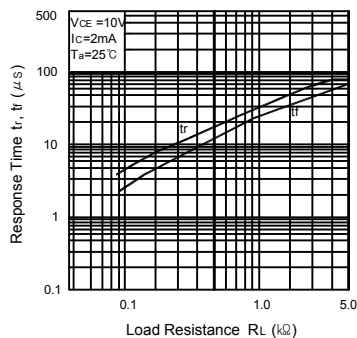

Collector Current vs. Forward Current

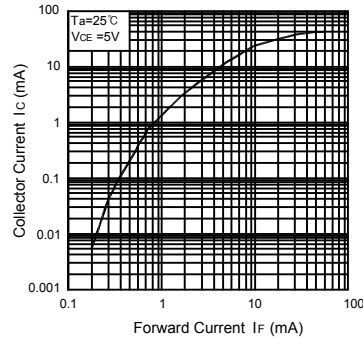

Switching Time Test Circuit

