

## 7.6mmX7.6mm SUPER FLUX LED LAMP

L-7676CSYC-H

SUPER BRIGHT YELLOW


### Features

- SUPER FLUX OUTPUT.
- DESIGN FOR HIGH CURRENT OPERATION.
- OUTSTANDING MATERIAL EFFICIENCY.
- RELIABLE AND RUGGED.

### Description

This devices are made with TS InGaAlP.

### Package Dimensions

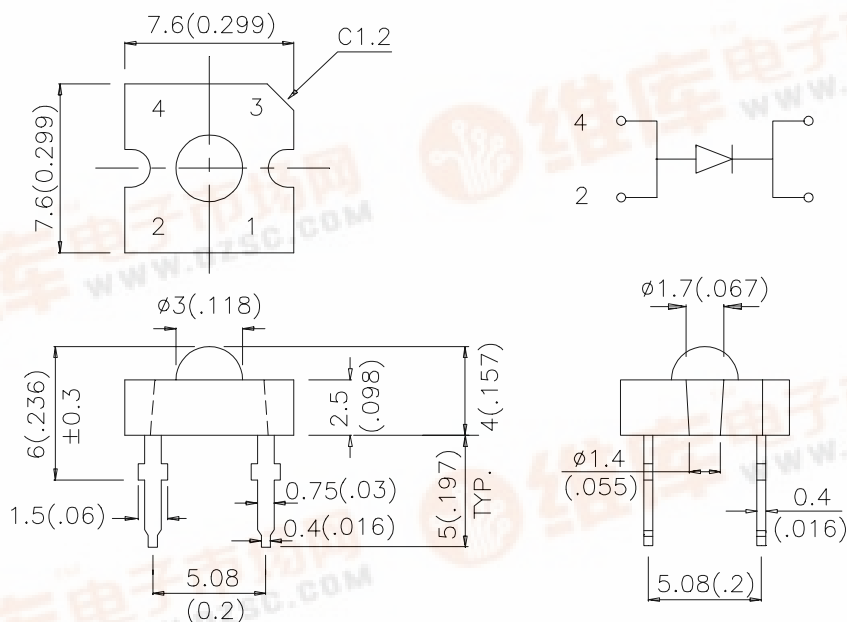

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.

## Selection Guide

| Part No.     | Dice                          | Lens Type   | Iv (mcd)<br>@ 20 mA *70mA |       | Viewing<br>Angle |
|--------------|-------------------------------|-------------|---------------------------|-------|------------------|
|              |                               |             | Min.                      | Typ.  | 2θ1/2            |
| L-7676CSYC-H | SUPER BRIGHT YELLOW (InGaAlP) | WATER CLEAR | 280                       | 450   | 70°              |
|              |                               |             | *480                      | *1100 | 70°              |

### Notes:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
2. \* Luminous intensity with asterisk is measured at 70mA.
3. Drive current between 10mA and 30mA are recommended for long term performance.
4. Operation at current below 10mA is not recommended.

## Electrical / Optical Characteristics at T<sub>A</sub>=25°C


| Symbol            | Parameter                | Device              | Typ. | Max. | Units | Test Conditions           |
|-------------------|--------------------------|---------------------|------|------|-------|---------------------------|
| λ <sub>peak</sub> | Peak Wavelength          | Super Bright Yellow | 590  |      | nm    | I <sub>F</sub> =20mA      |
| λ <sub>D</sub>    | Dominate Wavelength      | Super Bright Yellow | 589  |      | nm    | I <sub>F</sub> =20mA      |
| Δλ <sub>1/2</sub> | Spectral Line Half-width | Super Bright Yellow | 20   |      | nm    | I <sub>F</sub> =20mA      |
| C                 | Capacitance              | Super Bright Yellow | 45   |      | pF    | V <sub>F</sub> =0V;f=1MHz |
| V <sub>F</sub>    | Forward Voltage          | Super Bright Yellow | 2.3  | 2.8  | V     | I <sub>F</sub> =20mA      |
| I <sub>R</sub>    | Reverse Current          | Super Bright Yellow |      | 10   | uA    | V <sub>R</sub> = 5V       |

## Absolute Maximum Ratings at T<sub>A</sub>=25°C

| Parameter                     | Super Bright Yellow | Units |
|-------------------------------|---------------------|-------|
| Power dissipation             | 120                 | mW    |
| Forward Current               | 30                  | mA    |
| Peak Forward Current [1]      | 140                 | mA    |
| Reverse Voltage               | 5                   | V     |
| Operating/Storage Temperature | -40°C To +85°C      |       |
| Lead Solder Temperature [2]   | 260°C For 5 Seconds |       |

### Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.
2. 2mm below package base.

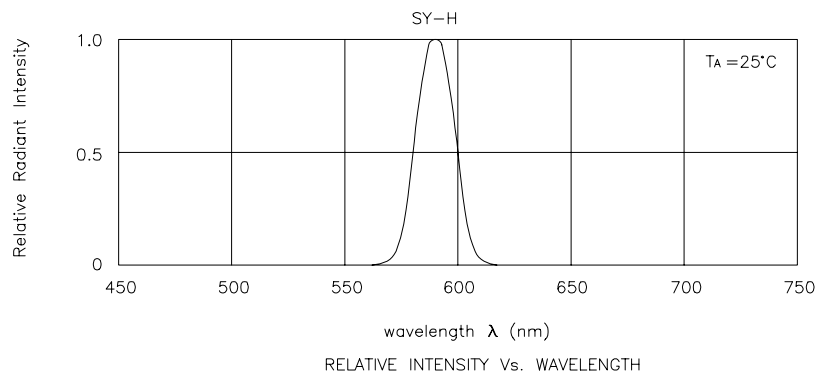

## Super Bright Yellow L-7676CSYC-H

